

5 Parts List

Overview

Introduction	5-3
Subsystem Information	5-3

Parts Lists

Drives

PL 1.1 Drive Unit	5-5
PL 1.2 Main Drive Motor Assembly	5-6
PL 1.3 IBT Steering Motor and MOB Sensor	5-7

Paper Transportation

PL 2.1 Tray 2	5-8
PL 2.3 Tray 2 Feeder and Left Lower Cover Assembly (Left Hand Door B Assembly) ..	5-9
PL 2.4 Tray 2 Feeder: 1 of 2	5-10
PL 2.5 Tray 2 Feeder: 2 of 2	5-11
PL 2.6 Registration Transport	5-12
PL 2.7 Left Cover Unit (Left Hand Door A)	5-13
PL 2.8 Left Cover Assembly (Left Hand Door A): 1 of 2	5-14
PL 2.9 Left Cover Assembly: 2 of 2	5-15
PL 2.10 Exit Transport Assembly	5-16
PL 2.11 Tray 1 (MPT): 1 of 2	5-17
PL 2.12 Tray 1 (MPT): 2 of 2	5-18
PL 2.13 Tray 1 (MPT) Feed Assembly	5-19

ROS

PL 3.1 ROS Assembly	5-20
---------------------------	------

Xerographics

PL 4.1 Xerographic Module: 1 of 2	5-21
PL 4.2 Xerographic Module: 2 of 2	5-22

Transfer

PL 5.1 Lift Unit	5-23
PL 5.2 IBT Unit	5-24
PL 5.3 IBT Belt Assembly (Accumulator Belt Assembly)	5-25
PL 5.6 IBT Elevator	5-26

Development

PL 6.1 Developer Unit: 1 of 2	5-27
PL 6.2 Developer Unit: 2 of 2	5-28

Fuser

PL 7.1 Fuser Assembly	5-29
-----------------------------	------

Air System

PL 8.1 Air System	5-30
-------------------------	------

Electrical Components

PL 9.1 Electrical Components: 1 of 3	5-31
--	------

PL 9.2 Electrical Components: 2 of 3	5-32
PL 9.3 Electrical Components: 3 of 3	5-33

Covers

PL 10.1 Front Cover	5-34
PL 10.2 Top Covers and Inner Covers	5-35
PL 10.3 Rear Cover	5-36

Inverter

PL 11.1 Inverter Transport	5-37
----------------------------------	------

Duplex Transport

PL 12.1 Duplex Transport Assembly	5-38
---	------

IOT Control Chassis

PL 13.1 IOT Control Chassis Assembly	5-39
--	------

1T 3T Modules

PL 15.9 Electrical Components and Casters	5-40
PL 15.10 Left Cover Assembly	5-41
PL 15.11 Covers	5-42

Tray Module - TT

PL 16.1 Tray 2/3/4/5 Assembly	5-43
PL 16.3 Tray 4	5-44
PL 16.4 Tray 5	5-45
PL 16.5 Tray 3/4/5 Paper Feeder: 1 of 2	5-46
PL 16.6 Tray 3/4/5 Paper Feeder: 2 of 2	5-47
PL 16.13 Left Cover Assembly (Left Hand Door C)	5-48
PL 16.14 Tray 4/5 Lift Gear Assembly	5-49
PL 16.15 Electrical Components and Casters	5-50
PL 16.16 Covers	5-51

A/P Finisher

PL 21.1 A/P Finisher	5-52
PL 21.2 Finisher Cover: 1 of 2	5-53
PL 21.3 Finisher Cover: 2 of 2	5-54
PL 21.4 Finisher Stack	5-55
PL 21.5 Finisher Punch	5-56
PL 21.6 Finisher Stapler	5-57
PL 21.7 Finisher Eject: 1 of 3	5-58
PL 21.8 Finisher Eject: 2 of 3	5-59
PL 21.9 Finisher Eject: 3 of 3	5-60
PL 21.10 Finisher Transport: 1 of 2	5-61
PL 21.11 Finisher Transport: 2 of 2	5-62
PL 21.12 Finisher Electrical	5-63
PL 21.13 Finisher Harness	5-64
PL 21.15 Booklet Accessory	5-65
PL 21.16 Booklet Component - 1	5-66

PL 21.17 Booklet Component -2 (End Guide).....	5-67
PL 21.18 Booklet Component -3	5-68
PL 21.19 Booklet Component -4	5-69
PL 21.20 Booklet Component -5	5-70
PL 21.21 Booklet Component -6 (Chute)	5-71
PL 21.22 Booklet Component -7	5-72
PL 21.23 Booklet Tray Component	5-73
PL 21.24 H-Transport: 1 of 4.....	5-74
PL 21.25 H-Transport: 2 of 4.....	5-75
PL 21.26 H-Transport: 3 of 4.....	5-76
PL 21.27 H-Transport: 4 of 4.....	5-77

Common Hardware

Common Hardware	5-78
Kit Part Number.....	5-79
Part Number Index	5-79

Introduction

Overview

The Parts List section identifies all part numbers and the corresponding location of all spared subsystem components.

Organization

Parts Lists

Each item number in the part number listing corresponds to an item number in the related illustration. All the parts in a given subsystem of the machine will be located in the same illustration or in a series of associated illustrations.

Electrical Connectors and Fasteners

This section contains the illustrations and descriptions of the plugs, jacks, and fasteners used in the machine. A part number listing of the connectors is included.

Common Hardware

The common hardware is listed in alphabetical order by the letter or letters used to identify each item in the part number listing and in the illustrations. Dimensions are in millimeters unless otherwise identified.

Part Number Index

This index lists all the spared parts in the machine in numerical order. Each number is followed by a reference to the parts list on which the part may be found.

Symbology

Symbology used in the Parts List section is identified in the Symbology section.

Service Procedure Referencing

If a part or assembly has an associated repair or adjustment procedure, the procedure number will be listed at the end of the part description in the parts lists e.g. (REP 5.1, ADJ 5.3)

Subsystem Information

Use of the Term “Assembly”

The term “assembly” will be used for items in the part number listing that include other itemized parts in the part number listing. When the word “assembly” is found in the part number listing, there will be a corresponding item number on the illustrations followed by a bracket and a listing of the contents of the assembly.


Brackets

A bracket is used when an assembly or kit is spared, but is not shown in the illustration. The item number of the assembly or kit precedes the bracket; the item numbers of the piece parts follow the bracket.

PL 1.1 Drive Unit

Item	Part	Description
1	007K88603	Drive Assy Drum FT (REP 4.4)
2	—	Imaging Unit Motor (P/O PL 1.1 Item 1)
3	—	Gear Bracket (P/O PL 1.1 Item 1)
4	007K87600	Drive Assy - IBT (REP 4.2)
5	—	IBT Motor (P/O PL 1.1 Item 4)
6	—	Gear Bracket (P/O PL 1.1 Item 4)
7	007K88661	Drive Assy - Developer FT (REP 4.3)
8	—	Developer Drive Motor (P/O PL 1.1 Item 7)
9	—	Gear (47/38T) (P/O PL 1.1 Item 7)
10	—	Gear (51/25T) (P/O PL 1.1 Item 7)
11	—	Gear (P/O PL 1.1 Item 7) (76T)
12	—	Clamp (P/O PL 1.1 Item 7)
13	—	Edge Saddle (P/O PL 1.1 Item 7)
14	007K88114	Drive Assy - Main FT (REP 4.1)
15	007K87221	Gear Assy Developer
16	—	Imaging Unit Motor (P/O PL 1.1 Item 1)
17	—	Screw (P/O PL 1.1 Item 1)
18	—	Take Away Motor


1 { 2, 3, 16, 17
4 { 5, 6
7 { 8 - 13

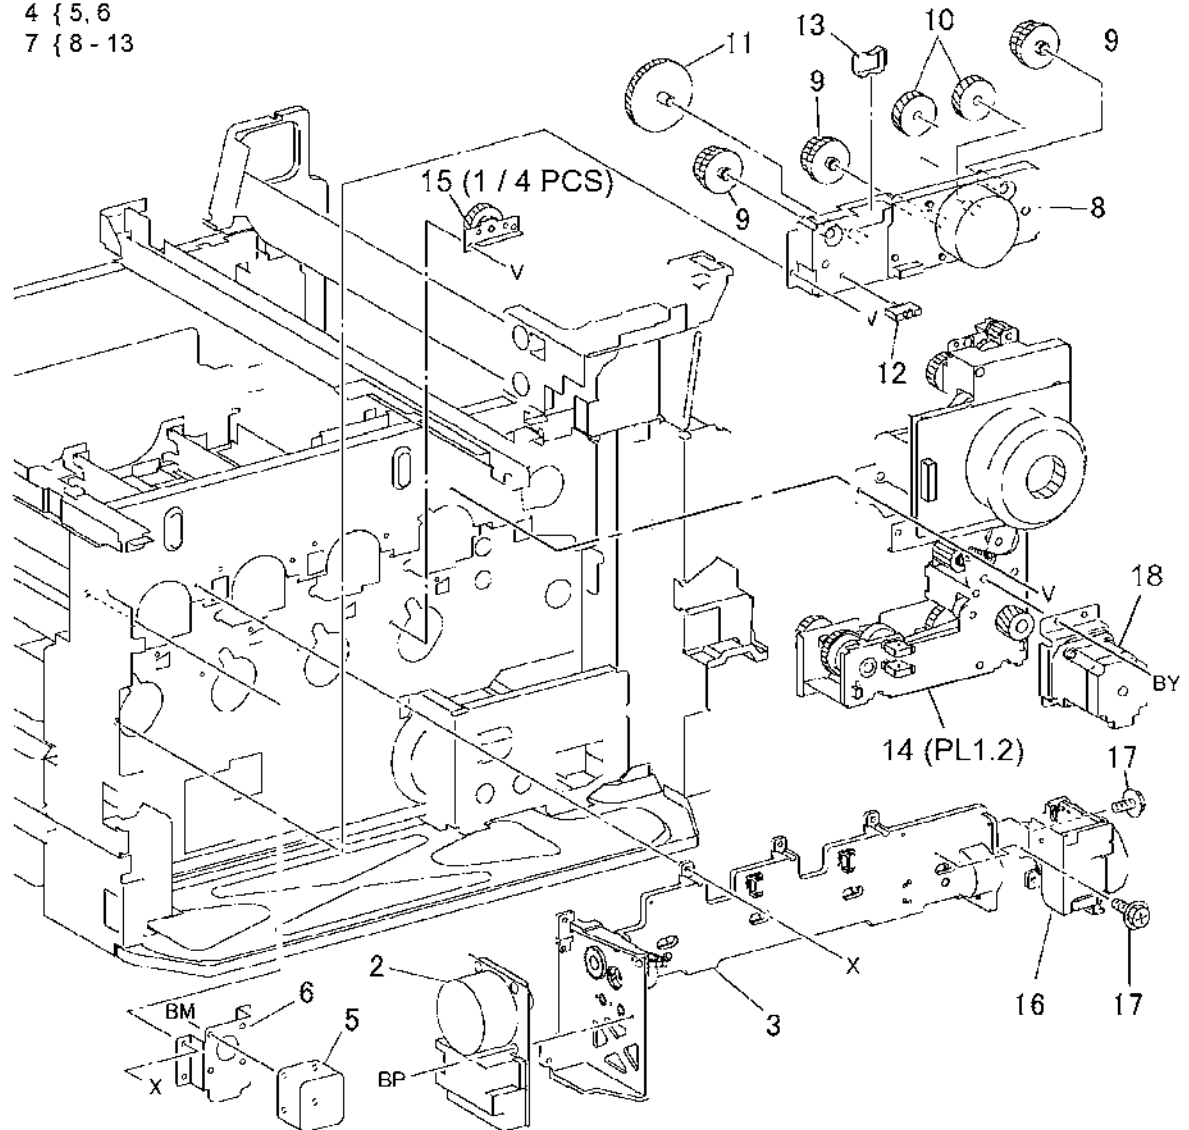

s7780-0734A

PL 1.2 Main Drive Motor Assembly

Item	Part	Description
1	—	Friction Clutch (P/O PL 1.1 Item 14)
2	—	Shaft (P/O PL 1.1 Item 14)
3	—	Gear (32T) (P/O PL 1.1 Item 14)
4	—	Gear (28T) (P/O PL 1.1 Item 14)
5	—	Bearing (P/O PL 1.1 Item 14)
6	—	Shaft (P/O PL 1.1 Item 14)
7	—	Gear (20T) (P/O PL 1.1 Item 14)
8	—	Gear (25T) (Not Spared)
9	—	Bearing (P/O PL 1.1 Item 14)
10	—	Shaft (P/O PL 1.1 Item 14)
11	—	Gear (39T) (P/O PL 1.1 Item 14)
12	—	Bearing (P/O PL 1.1 Item 14)
13	121K23270	Clutch Assy - Developer
14	—	Gear (69/27T) (P/O PL 1.1 Item 14)
15	—	Gear (23T) (P/O PL 1.1 Item 14)
16	—	Gear (28/22T) (P/O PL 1.1 Item 14)
17	—	Gear (45/30T) (P/O PL 1.1 Item 14)
18	—	Gear (41/25T) (P/O PL 1.1 Item 14)
19	—	Gear (24/20T) (P/O PL 1.1 Item 14)
20	—	Gear (19T) (P/O PL 1.1 Item 14)
21	—	Gear (18T) (P/O PL 1.1 Item 14)
22	—	Gear (73/23T) (P/O PL 1.1 Item 14)
23	—	Spring (P/O PL 1.1 Item 14)
24	—	Tension Bracket (P/O PL 1.1 Item 14)
25	—	Bracket (P/O PL 1.1 Item 14)
26	—	Pulley (P/O PL 1.1 Item 14)
27	—	Screw (P/O PL 1.1 Item 14)
28	—	Main Motor (P/O PL 1.1 Item 14)
29	—	Belt (P/O PL 1.1 Item 14)
30	—	Clamp (P/O PL 1.1 Item 14)
31	—	Clamp (P/O PL 1.1 Item 14)
32	—	Connector (P/O PL 1.1 Item 14)
33	—	Pulley (P/O PL 1.1 Item 14)
34	—	Gear (30T) (Not Spared)

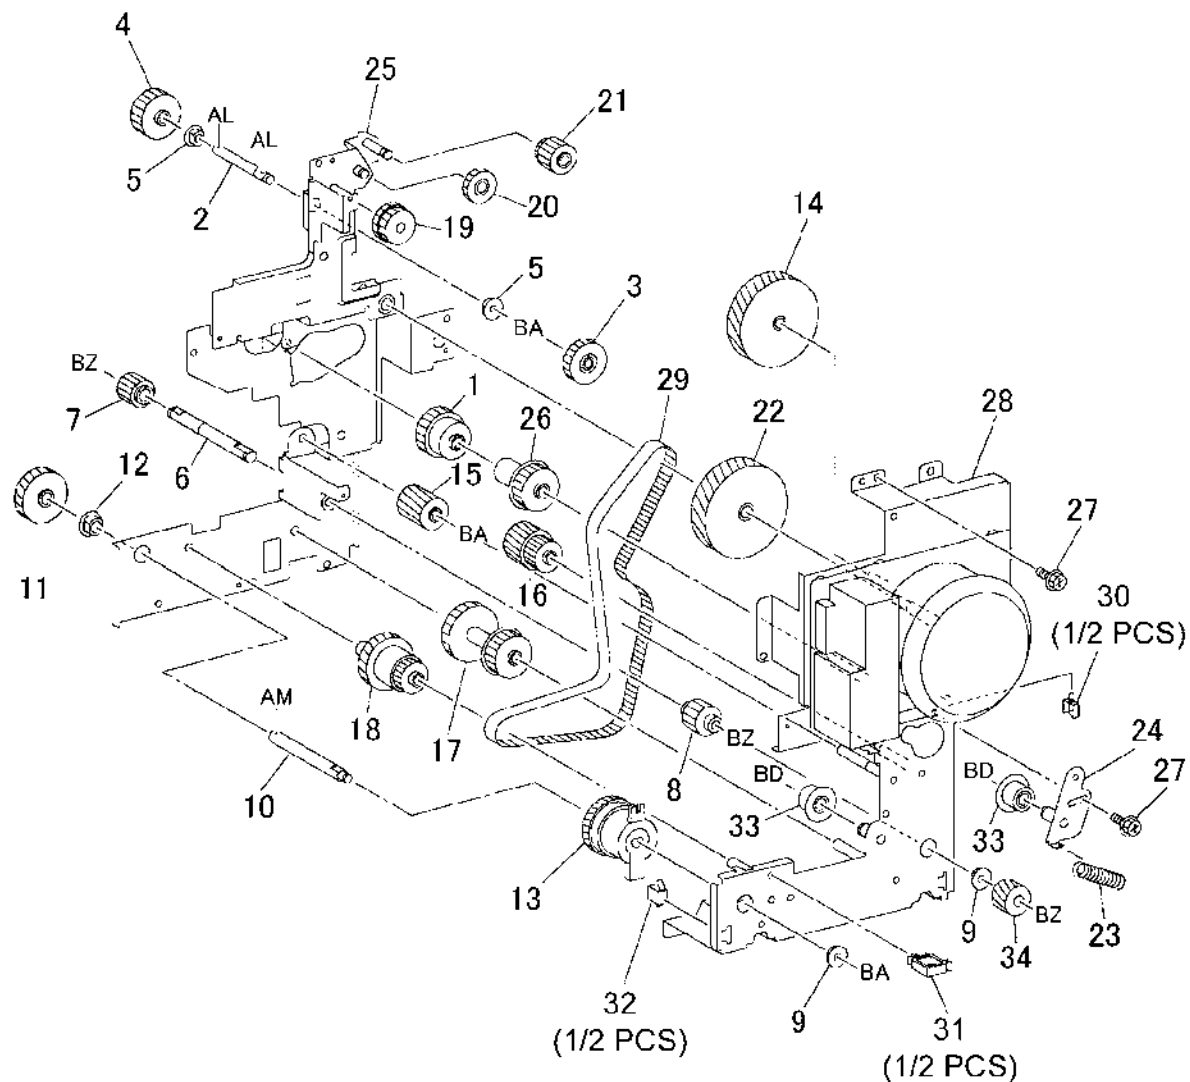


s7760-0735A

PL 1.3 IBT Steering Motor and MOB Sensor

Item	Part	Description
1	007K85582	Drive Assy - Steering (REP 9.12)
2	—	IBT Steering Motor (P/O PL 1.3 Item 1)
3	—	Plate (P/O PL 1.3 Item 1)
4	130K60866	Sensor Assy - MOB (REP 9.14)
5	—	MOB Sensor (P/O PL 1.3 Item 4)
6	—	Environment Sensor (P/O PL 1.3 Item 4)
7	—	Wire Harness (P/O PL 1.3 Item 4)
8	—	Cover (P/O PL 1.3 Item 4)
9	—	ADC Sensor (P/O PL 1.3 Item 4)
10	—	Shutter (P/O PL 1.3 Item 4)
11	—	Spring (P/O PL 1.3 Item 4)
12	—	Link (P/O PL 1.3 Item 4)
13	—	Spacer (P/O PL 1.3 Item 4)
14	—	MOB Bracket (P/O PL 1.3 Item 4)
15	—	Slide (P/O PL 1.3 Item 4)


1 { 2, 3
4 { 5 - 15

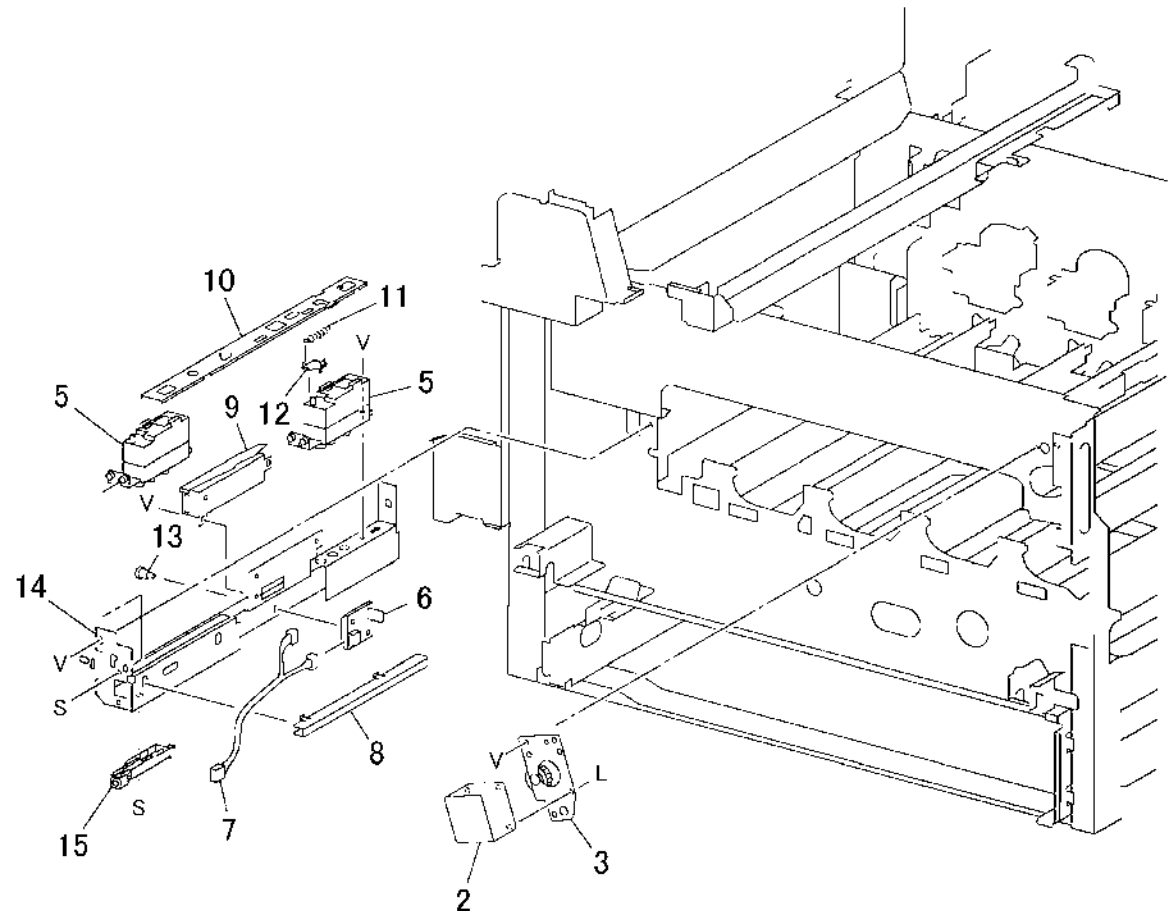

s7760-0736A

PL 2.1 Tray 2

Item	Part	Description
1	003E23672	Stopper Tray
2	—	Spacer
3	110K12990	Switch Assy - P.S. (Tray 2 Paper Size Sensor) (REP 7.5)
4	050K56361	Tray 2/3/4/5 (Universal Tray) (REP 7.8)
5	—	Cover (Not Spared)
6	—	Label (1)
7	—	Bracket (Not Spared)

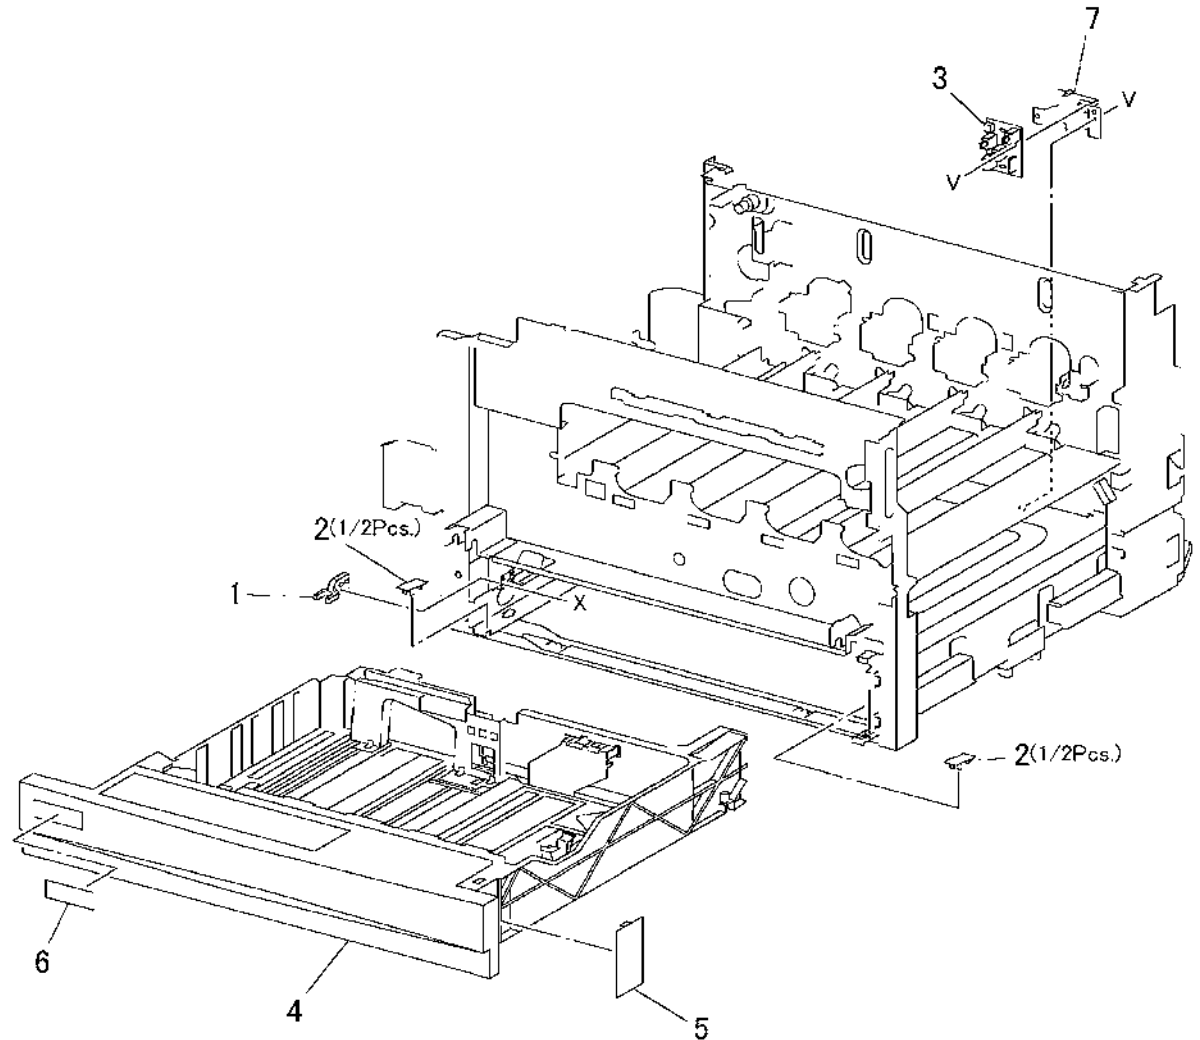


s7760-0737A

PL 2.3 Tray 2 Feeder and Left Lower Cover Assembly (Left Hand Door B Assembly)

Item	Part	Description
1	059K15577	Feeder Assy (Tray 2 Feeder) (REP 7.3)
2	802K56394	Cover Assy - LH Low (Left Lower Cover Assy) (REP 14.6)
3	—	Left Lower Cover (P/O PL 2.3 Item 2)
4	029E31600	Rivet
5	—	Bracket (P/O PL 2.3 Item 2)
6	—	Spring (P/O PL 2.3 Item 2)
7	—	Pinch Roll (P/O PL 2.3 Item 2)
8	—	Bearing (P/O PL 2.3 Item 2)
9	—	Bearing (P/O PL 2.3 Item 2)
10	—	Bearing (P/O PL 2.3 Item 2)
11	130K60851	Tray 2 Feed Out Sensor
12	—	Wire Harness (P/O PL 2.3 Item 2)
13	—	Ground Plate (P/O PL 2.3 Item 2)
14	—	Magnet (P/O PL 2.3 Item 2)
15	—	LH Lower Cover Interlock Switch
16	054E16060	Chute Lower
17	—	Pinch Roll Assembly
18	—	Seal (Not Spared)
19	—	Seal (Not Spared)


2 { 3, 5 - 14, 18, 19
17 { 5 - 12

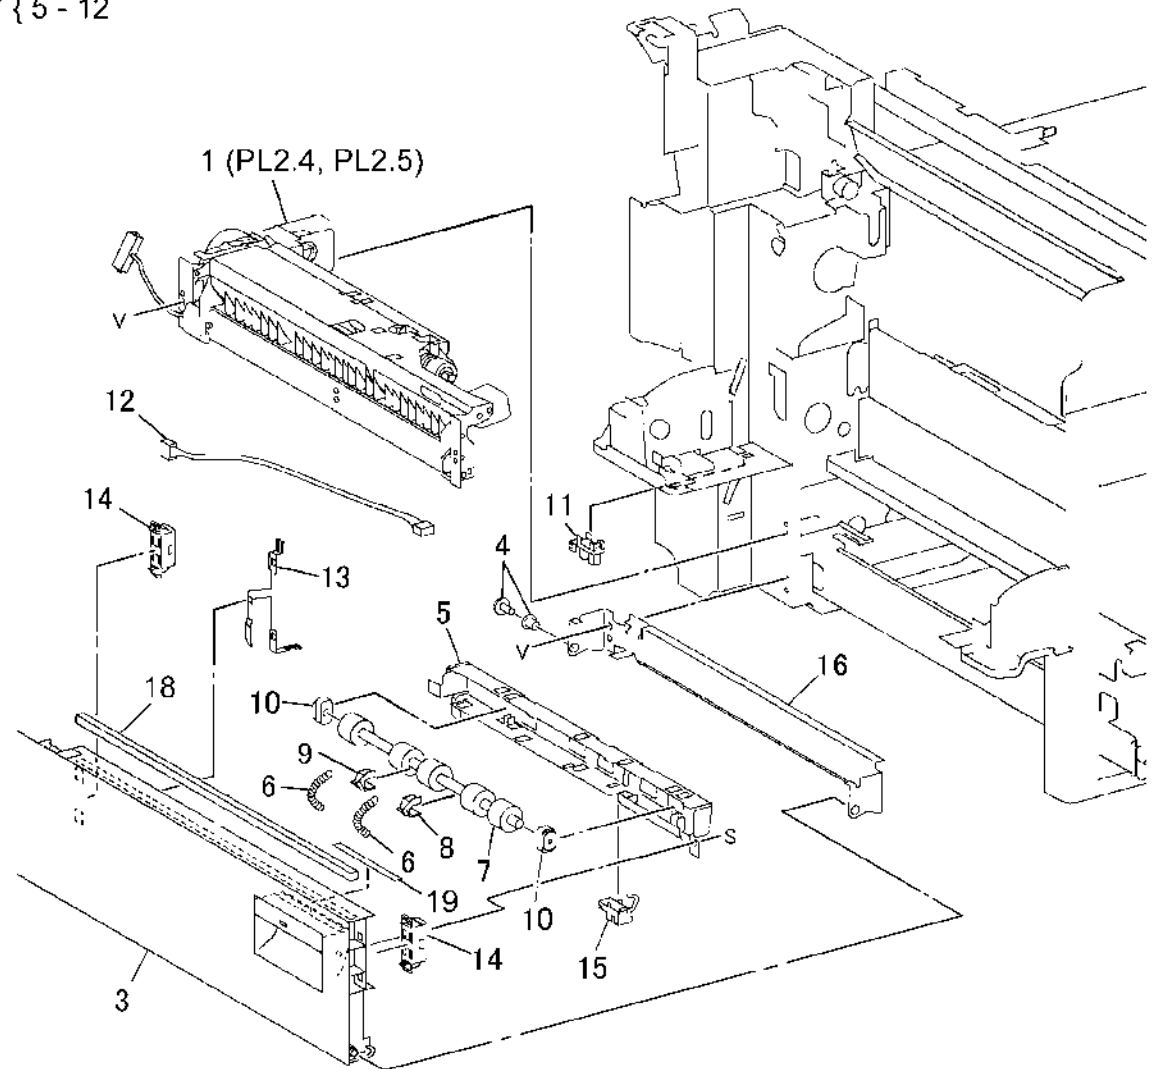

s7790-0738A

PL 2.4 Tray 2 Feeder: 1 of 2


Item	Part	Description
1	127K23231	Motor Assy (Tray 2/3/4/5 Feed/Lift Motor) (REP 7.4)
2	—	Bracket (P/O PL 2.3 Item 1)
3	—	One-way Clutch
4	—	One-way Gear
5	—	Gear (13T) (P/O PL 2.3 Item 1)
6	—	Bearing (P/O PL 2.3 Item 1)
7	—	Shaft (P/O PL 2.3 Item 1)
8	—	Front Frame (P/O PL 2.3 Item 1)
9	—	Upper Frame (P/O PL 2.3 Item 1)
10	—	Front Chute (P/O PL 2.3 Item 1)
11	—	Actuator
12	604K16630	Tray 2 Level / No Paper Sensor (part of Sensor Kit)
13	—	Wire Harness (P/O PL 2.3 Item 1)
14	—	Support (P/O PL 2.3 Item 1)
15	—	Gear (15T) (P/O PL 2.3 Item 1)
16	—	Washer (P/O PL 2.3 Item 1)

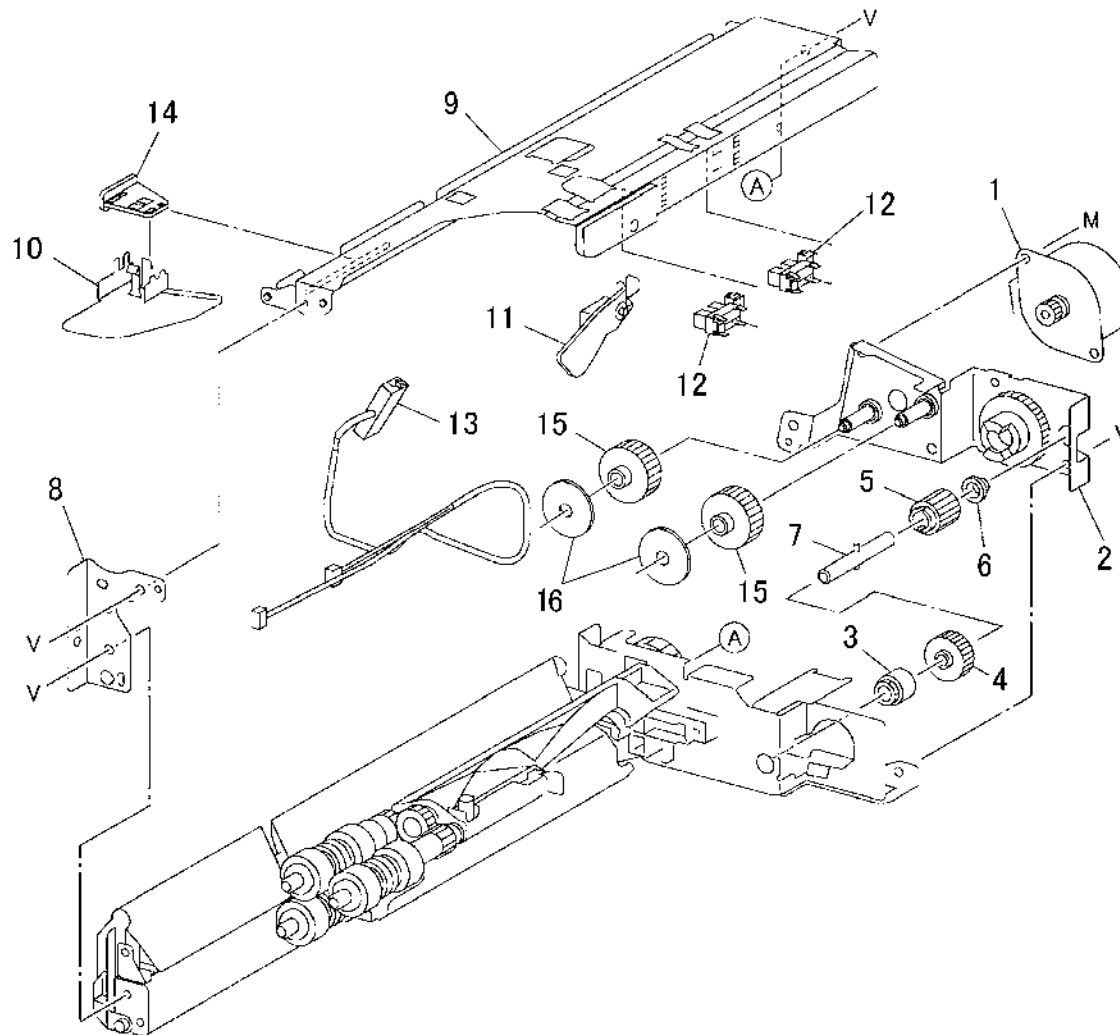

s7760-0739A

PL 2.5 Tray 2 Feeder: 2 of 2

Item	Part	Description
1	—	Spring (P/O PL 2.3 Item 1)
2	600K78460	Roll Kit (3 Rolls/Kit)
3	—	One-way Clutch
4	—	Gear (P/O PL 2.3 Item 1)
5	—	Shaft (P/O PL 2.3 Item 1)
6	—	Chute (P/O PL 2.3 Item 1)
7	—	Spring (P/O PL 2.3 Item 1)
8	—	Friction Clutch (P/O PL 2.3 Item 1)
9	—	Support (P/O PL 2.3 Item 1)
10	—	Holder (P/O PL 2.3 Item 1)
11	—	Spacer (P/O PL 2.3 Item 1)
12	—	Gear (31T) (P/O PL 2.3 Item 1)
13	—	Support (P/O PL 2.3 Item 1)
14	—	Bearing (P/O PL 2.3 Item 1)
15	—	Gear (P/O PL 2.3 Item 1)
16	—	Support (P/O PL 2.3 Item 1)
17	—	Screw (P/O PL 2.3 Item 1)
18	—	Bearing (P/O PL 2.3 Item 1)
19	—	Gear (35T) (P/O PL 2.3 Item 1)
20	—	Spring (P/O PL 2.3 Item 1)
21	—	Lever (P/O PL 2.3 Item 1)

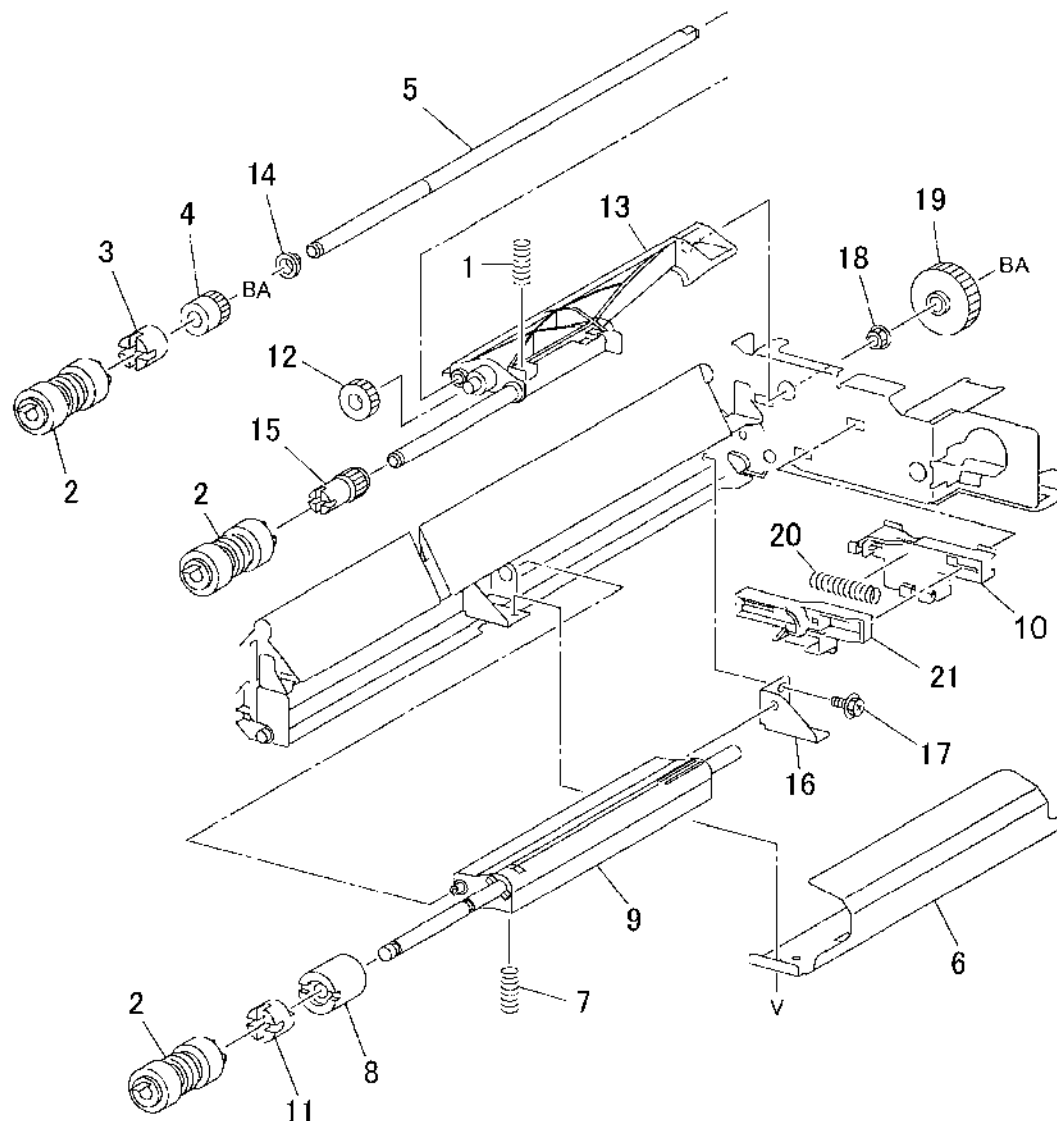


s7760-0740A

PL 2.6 Registration Transport

Item	Part	Description
1	059K26794	Registration Transport Assembly (REP 8.6)
2	—	Bearing (P/O PL 2.6 Item 1)
3	—	Bearing (P/O PL 2.6 Item 1)
4	—	Takeaway Roll (Not Spared)
5	—	Gear (22T) (P/O PL 2.6 Item 1)
6	—	Paper Guide (P/O PL 2.6 Item 1)
7	—	Registration Chute (P/O PL 2.6 Item 1)
8	—	Registration Clutch
9	—	Bearing (P/O PL 2.6 Item 1)
10	—	Ground Plate (P/O PL 2.6 Item 1)
11	—	Registration Roll (P/O PL 2.6 Item 1)
12	604K16630	Registration Sensor (part of Sensor Kit)
13	—	Screw (P/O PL 2.6 Item 1)
14	604K16630	OHP Sensor (part of Sensor Kit)
15	—	Registration Support (P/O PL 2.6 Item 1)
16	—	Wire Harness (P/O PL 2.6 Item 1)
17	—	Ground Plate (P/O PL 2.6 Item 1) (ACO)

1 { 2 - 17

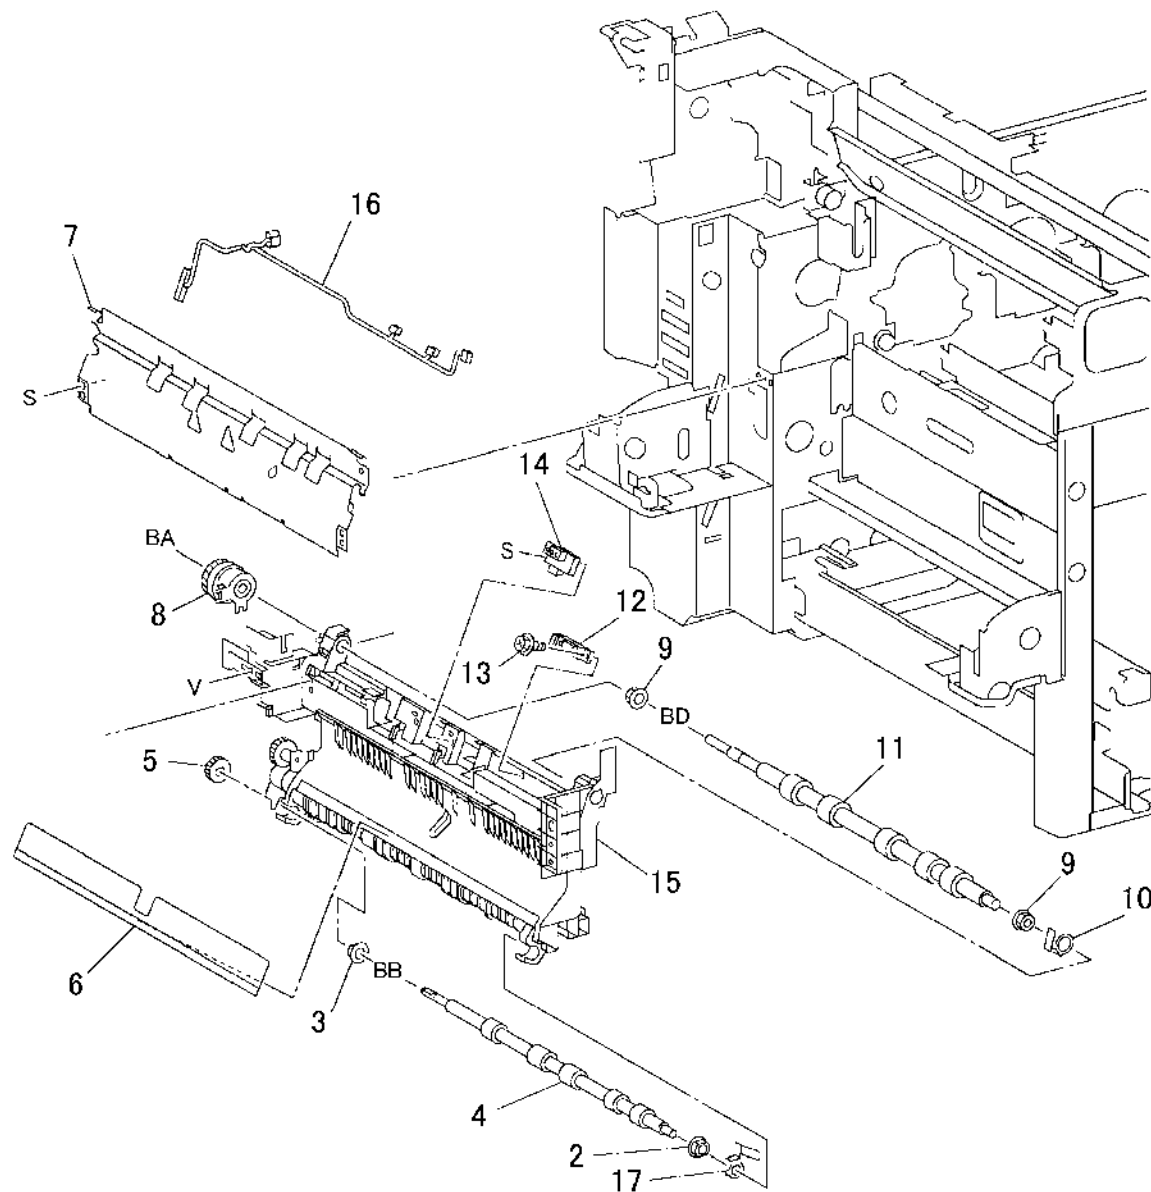


s7760-0741A

PL 2.7 Left Cover Unit (Left Hand Door A)

Item	Part	Description
1	007E64740	Gear Damper (11/23T)
2	—	Stud (Not Spared)
3	004E11831	Damper-LH (White)
4	—	Left Upper Cover (Not Spared)
5	802K89430	Cover Assy-LH OPB 3 (Left Cover Assembly) (Left Hand Door A)
6	—	Left Cover (P/O PL 2.7 Item 5)
7	—	Screw (Not Spared)
8	—	Label (P/O PL 2.7 Item 5)
9	—	Cover (Not Spared)
10	—	Lower Cover (Left Hand Door B) (Not Spared)
11	—	Label (Not Spared)

5 { 6, 8, 11

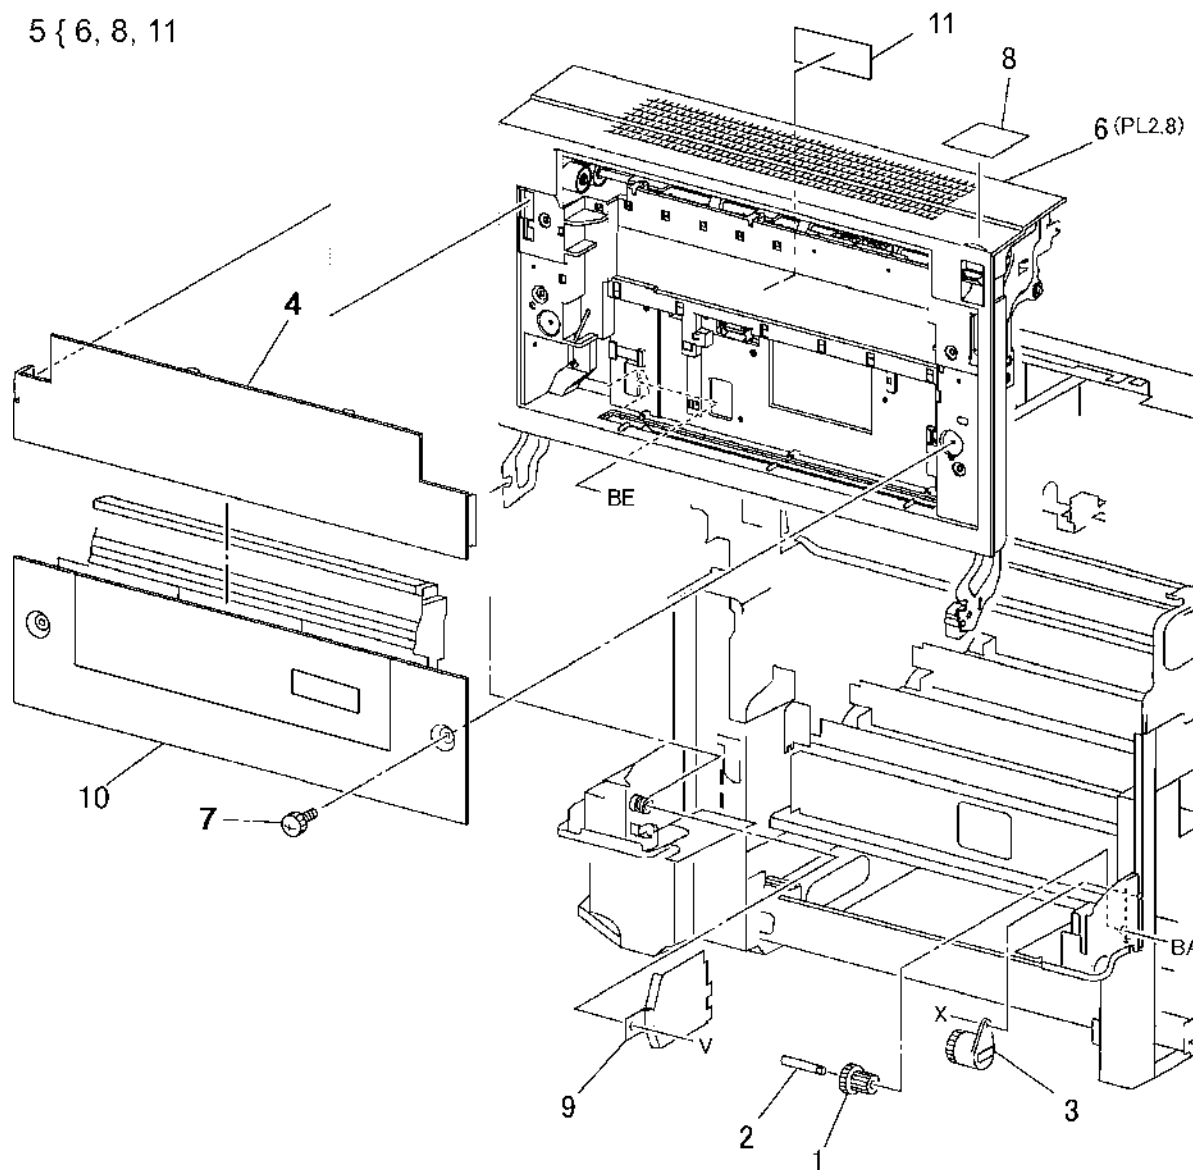


s7780-0742A

PL 2.8 Left Cover Assembly (Left Hand Door A): 1 of 2

Item	Part	Description
1	—	Registration Chute
2	—	Holder (Not Spared)
3	108R00579	2nd BTR
4	—	Spring
5	—	Support
6	—	Left Cover (Left Hand Door A) (Not Spared)
7	007E62630	Gear (22T)
8	059K15613	Roll Assy - Exit
9	007E79480	Gear (22T)
10	—	Bearing (Not Spared)
11	—	Holder (Not Spared)
12	110K10651	Switch Assy-Exit (Fuser Exit Switch)
13	—	Holder (Not Spared)
14	054K16131	Duplex Chute Assy (REP 8.2)
15	—	Stop (Not Spared)
16	—	Fuser Exit Switch Assembly
17	—	Extension Spring

16 { 11, 12

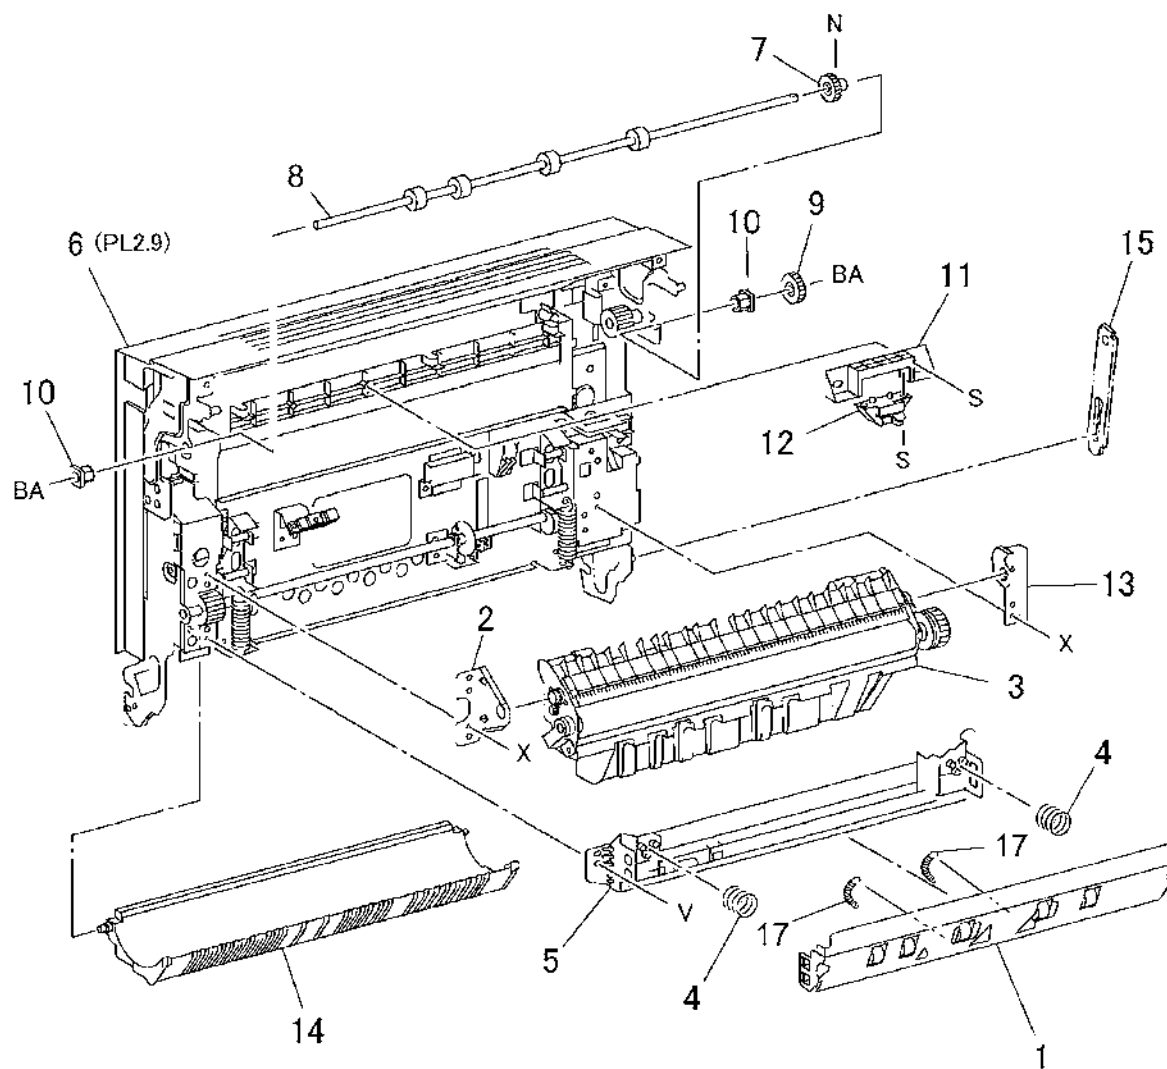


s7760-0743A

PL 2.9 Left Cover Assembly: 2 of 2

Item	Part	Description
1	—	Bearing (Not Spared)
2	—	Gear Assembly
3	127K29513	Motor Assy (2nd BTR Retract Motor)
4	604K16630	2nd BTR Retract Sensor (part of Sensor Kit)
5	—	Bracket (Not Spared)
6	130E84300	Sensor - APS, Long (POB Sensor)
7	830E62811	Bracket Sensor
8	—	Spring (Not Spared)
9	—	Bracket (Not Spared)
10	802K27076	Cover Assy-LH PH2 (Left Cover Assy)
11	—	Left Cover (Left Hand Door A) (P/O PL 2.9 Item 10)
12	—	Lever (P/O PL 2.9 Item 10)
13	—	Bracket (P/O PL 2.9 Item 10)
14	—	Gear (21T) (P/O PL 2.9 Item 10)
15	—	Connector Assembly (Not Spared)
16	—	Spring (P/O PL 2.9 Item 10)
17	007K86932	Gear Assy - Gear (45T)

10 { 11-14,16,17

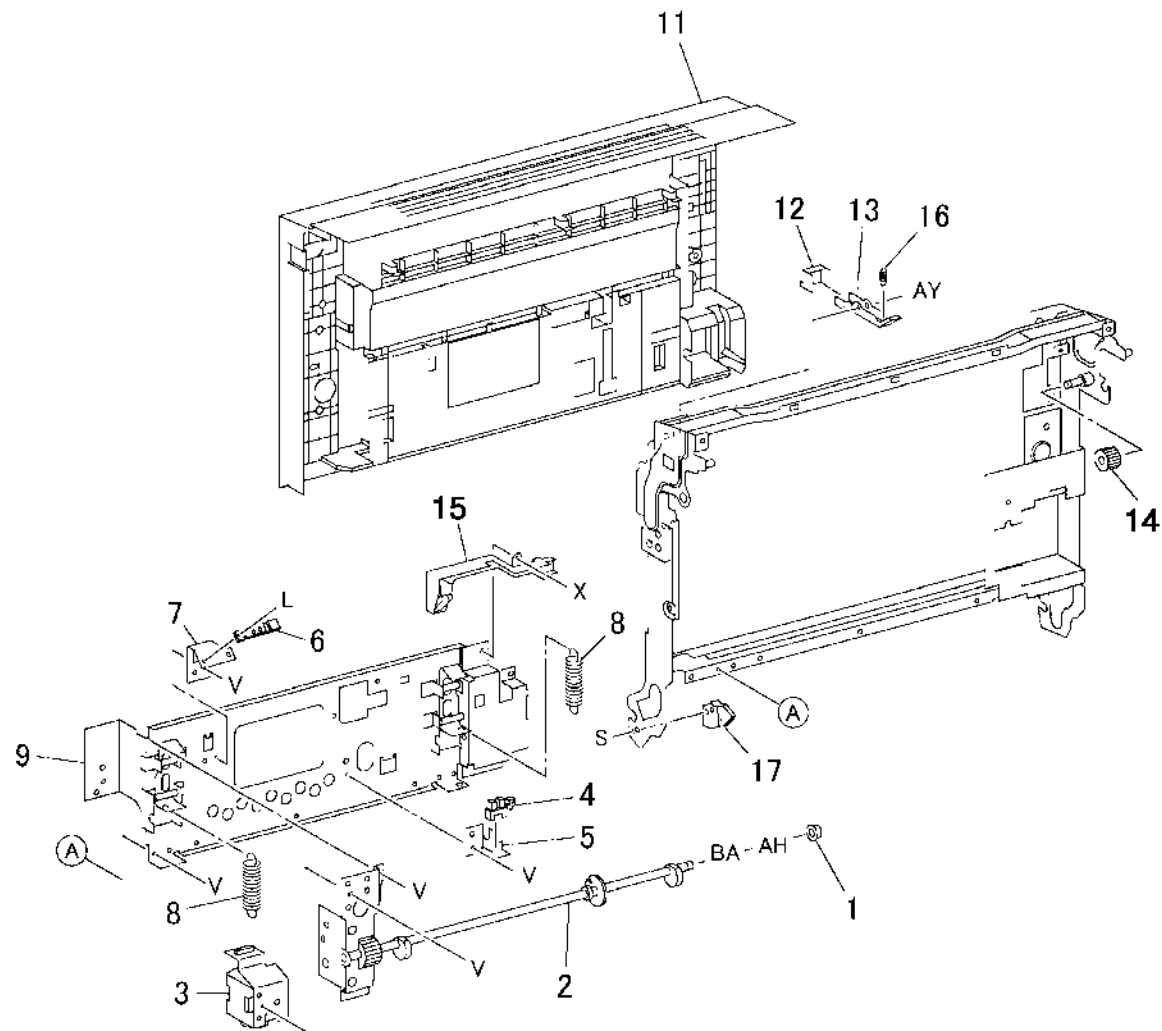


s7760-0744A

PL 2.10 Exit Transport Assembly

Item	Part	Description
1	059K45940	Exit Transport Assembly (REP 8.7)
2	802E12772	Cover Exit (Exit Transport Cover)
3	—	Bearing (P/O PL 2.10 Item 1)
4	—	Pin (P/O PL 2.10 Item 1)
5	—	Exit Roll (P/O PL 2.10 Item 1)
6	—	Actuator
7	—	Bracket (P/O PL 2.10 Item 1)
8	604K16630	Full Paper Stack Sensor (part of Sensor Kit)
9	—	Latch (P/O PL 2.10 Item 1)
10	—	Spring (P/O PL 2.10 Item 1)
11	—	Pinch Roll (P/O PL 2.10 Item 1)
12	—	Pinch Roll (P/O PL 2.10 Item 1)
13	—	LH Cover Interlock Switch (P/O PL 2.10 Item 1)
14	—	Bracket (P/O PL 2.10 Item 1)
15	—	Static Eliminator (P/O PL 2.10 Item 1)
16	—	Offset Motor (P/O PL 2.10 Item 1)
17	—	Wire Harness (P/O PL 2.10 Item 1)
18	—	Screw (P/O PL 2.10 Item 1)
19	—	Front Bracket (P/O PL 2.10 Item 1)
20	—	Frame (P/O PL 2.10 Item 1)
21	—	Label (Not Spared)


1 { 2 - 20

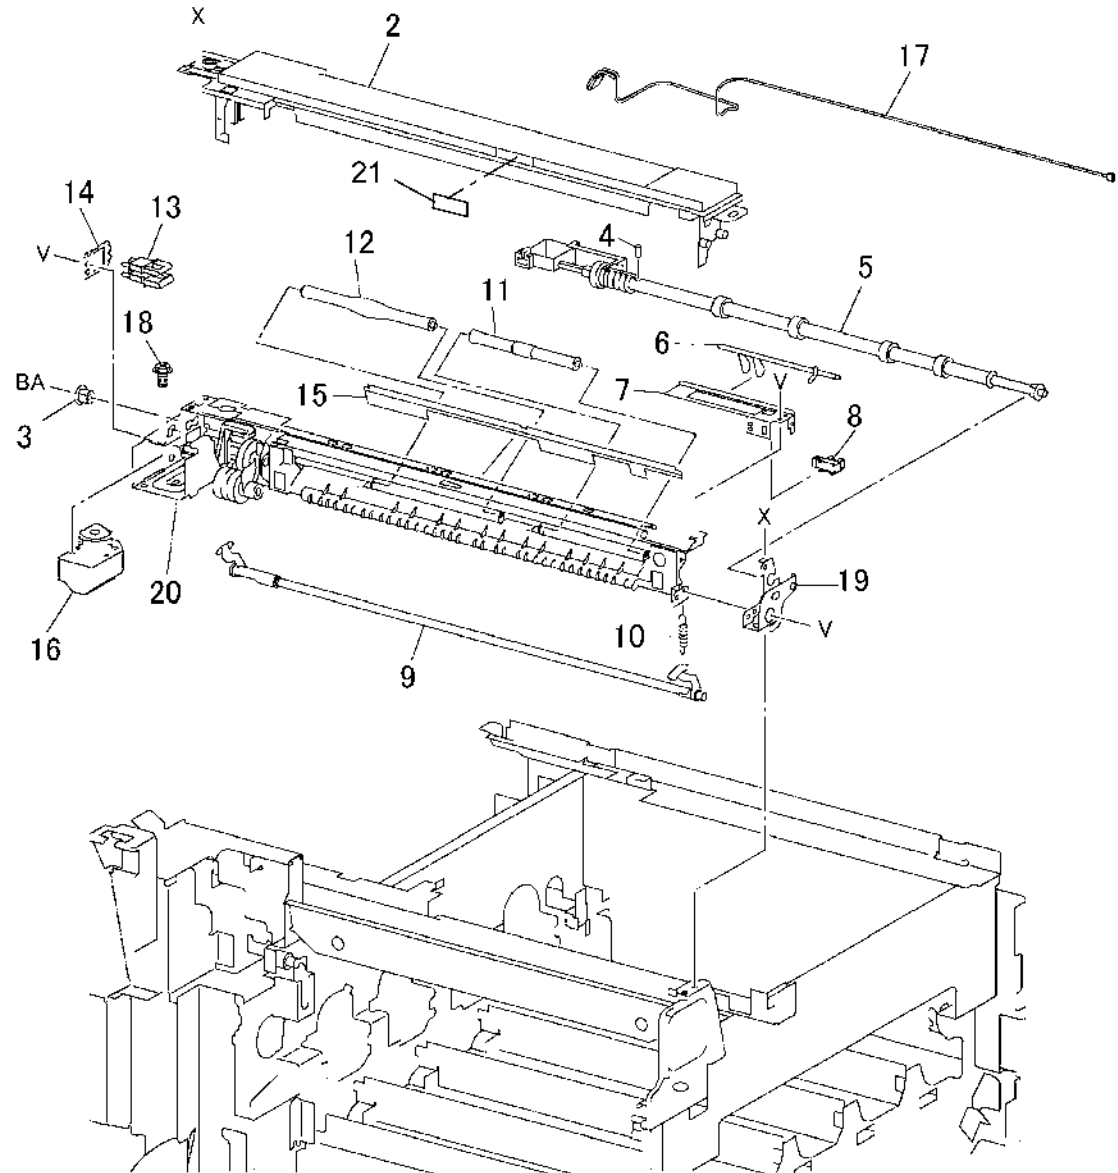

s7760-0745A

PL 2.11 Tray 1 (MPT): 1 of 2


Item	Part	Description
1	059K45883	Feeder Assembly Tray 1 (MPT) (REP 7.1)

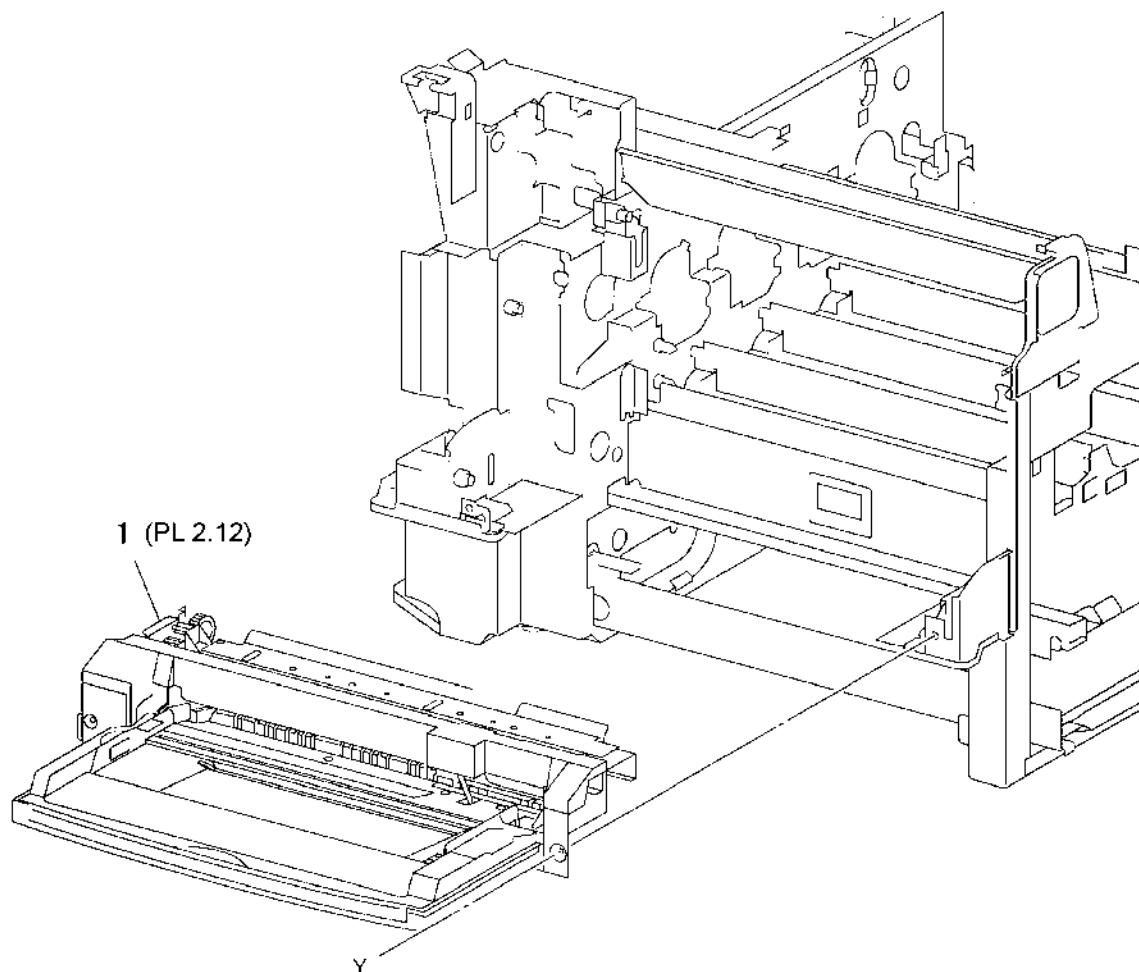

s7760-0746A

PL 2.12 Tray 1 (MPT): 2 of 2


Item	Part	Description
1	—	Spring (P/O PL 2.11 Item 1)
2	—	Bracket (P/O PL 2.11 Item 1)
3	—	Gear (P/O PL 2.11 Item 1)
4	—	Spring (P/O PL 2.11 Item 1)
5	050K56372	Tray 1 (MPT) Assembly
6	—	Upper Frame (P/O PL 2.11 Item 1)
7	600K87510	Actuator (part of Sensor Flag Kit)
8	604K16630	Tray 1 (MPT) No Paper Sensor (part of Sensor Kit)
9	—	Tray 1 (MPT) Feed Assembly (P/O PL 2.11 Item 1)
10	—	Spring (P/O PL 2.11 Item 1)
11	—	Pinch Roll 1/2 (P/O PL 2.11 Item 1)
12	—	Chute (P/O PL 2.11 Item 1)
13	—	Guide (P/O PL 2.11 Item 1)
14	—	Shaft (P/O PL 2.11 Item 1)
15	—	Spring (P/O PL 2.11 Item 1)
16	—	Spacer (P/O PL 2.11 Item 1)
17	—	Pinch Roll 3 (P/O PL 2.11 Item 1)

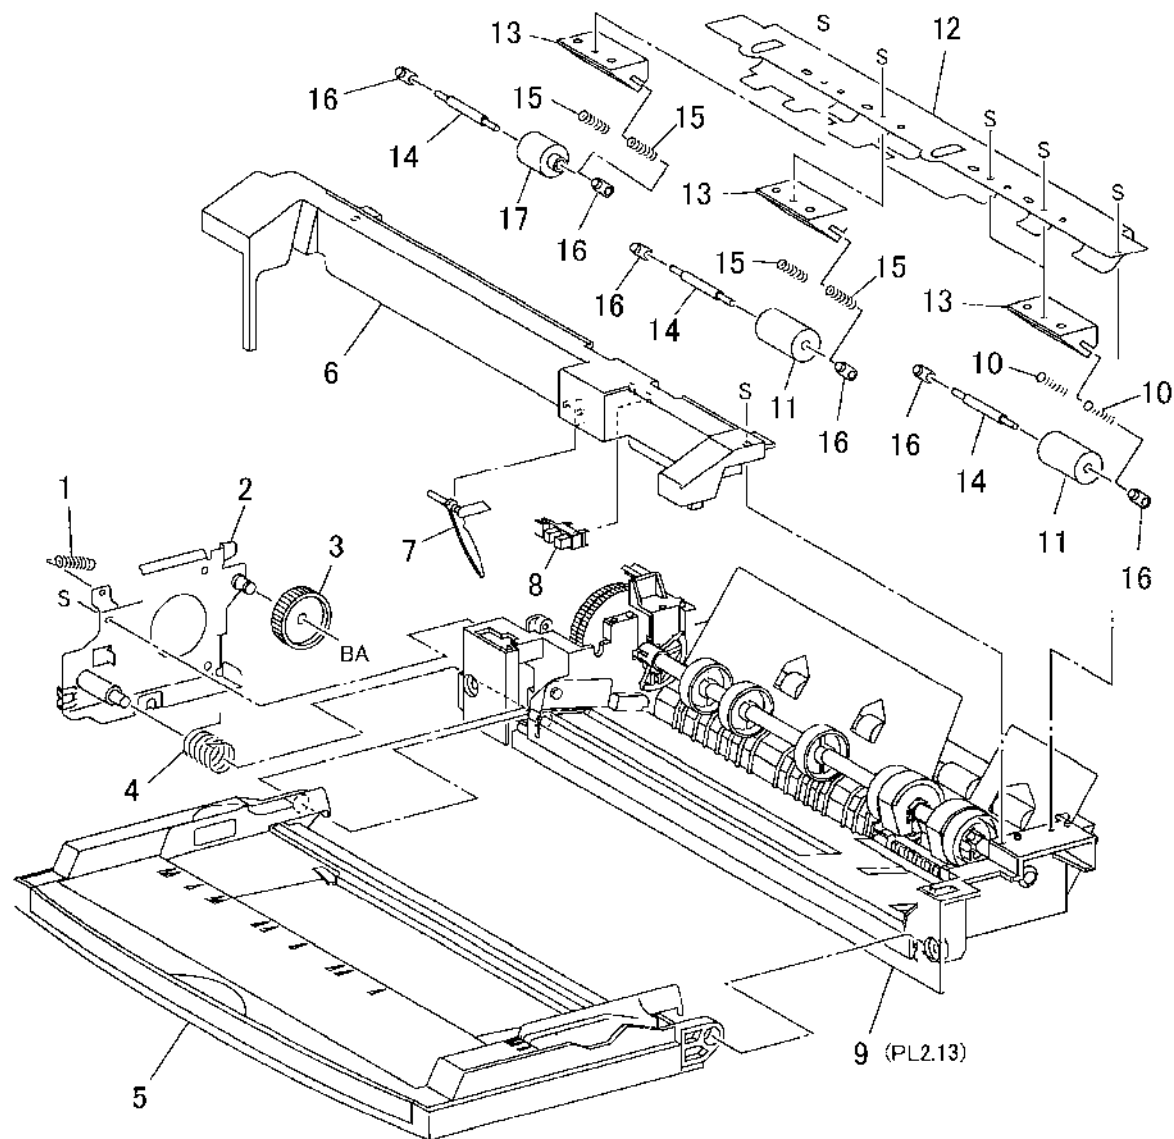

s7760-0747A

PL 2.13 Tray 1 (MPT) Feed Assembly


Item	Part	Description
1	—	Paper Guide
2	—	Takeaway Roll (Not Spared)
3	—	Bearing (Not Spared)
4	—	Gear (Not Spared)
5	—	Pick-up Gear (Not Spared)
6	—	Cam Gear (Not Spared)
7	—	Stop Lever (Not Spared)
8	—	Gear Lever (Not Spared)
9	—	Tray 1 Feed Solenoid
10	—	Screw (Not Spared)
11	—	Spring (Not Spared)
12	—	Ground Plate (Not Spared)
13	—	Spring (Not Spared)
14	—	Feed Roll Assembly
15	059K24010	Roller Assy - Feed (Feed Roll) (REP 7.2)
16	—	Cam (P/O PL 2.13 Item 14)
17	—	Cam (P/O PL 2.13 Item 14)
18	—	Shaft (P/O PL 2.13 Item 14)
19	019K08650	Retard Pad
20	—	Spring (Not Spared)
21	—	Bottom Plate (Not Spared)
22	809E07520	Spring N/F Rear (90)
23	—	Lower Frame (Not Spared)
24	809E27640	Spring-N_F

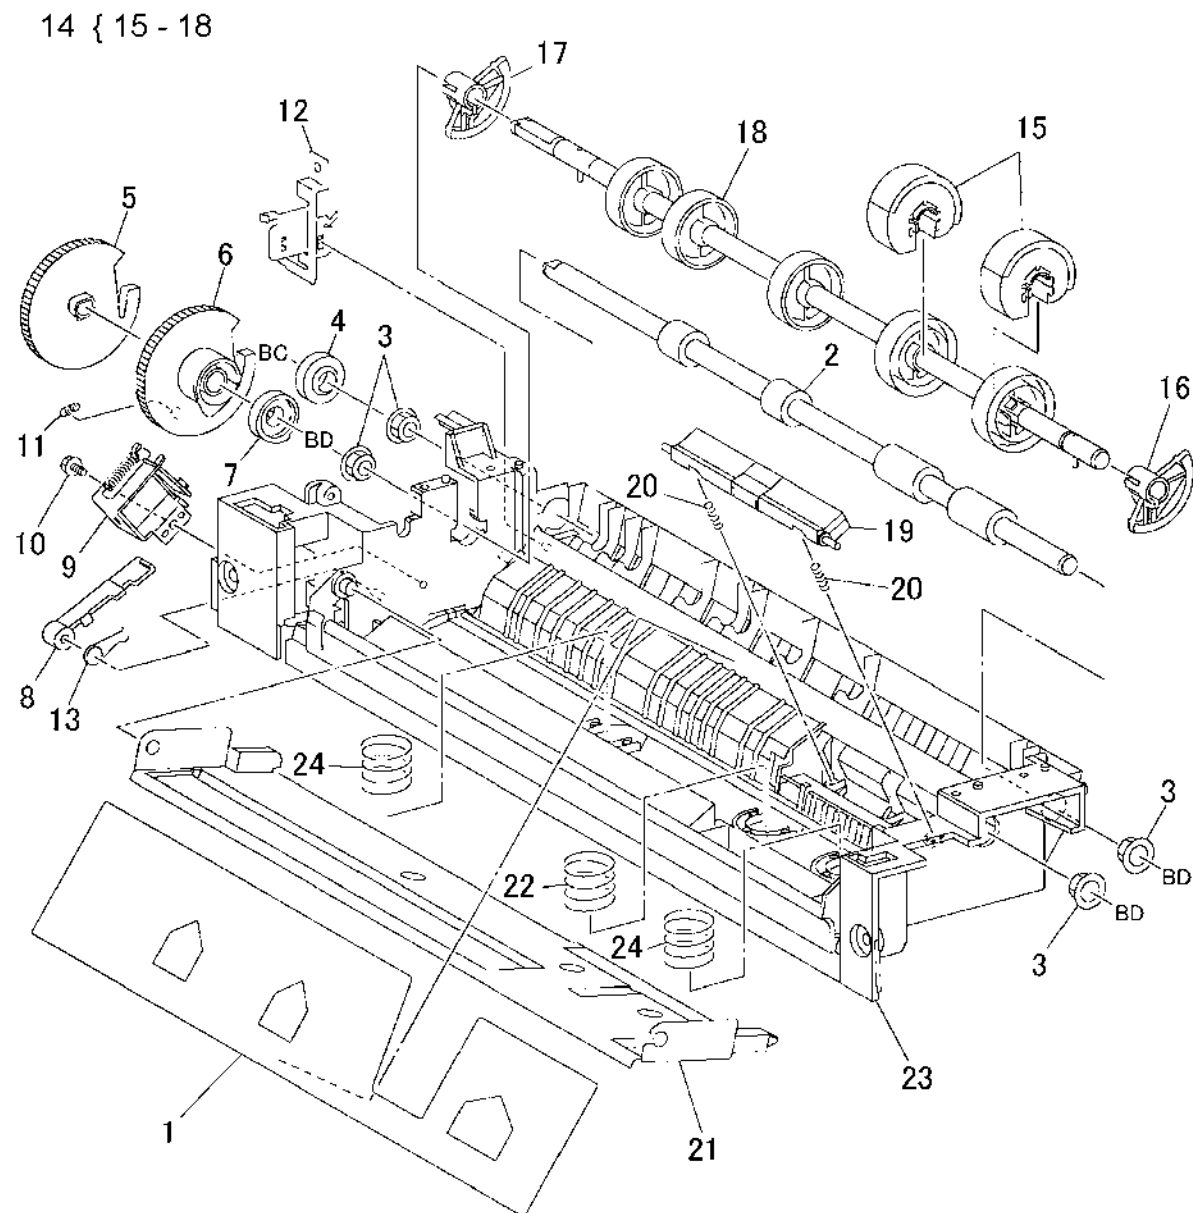

s7760-0748A

PL 3.1 ROS Assembly


Item	Part	Description
1	—	Bracket (Not Spared)
2	062K16910	ROS Assy FT (REP 6.1)
3	—	Seal Glass (Y) (Not Spared)
4	—	Seal Glass (M) (Not Spared)
5	—	Seal Glass (C) (Not Spared)
6	—	Seal Glass (K) (Not Spared)
7	—	M/C Heater (Not Spared)

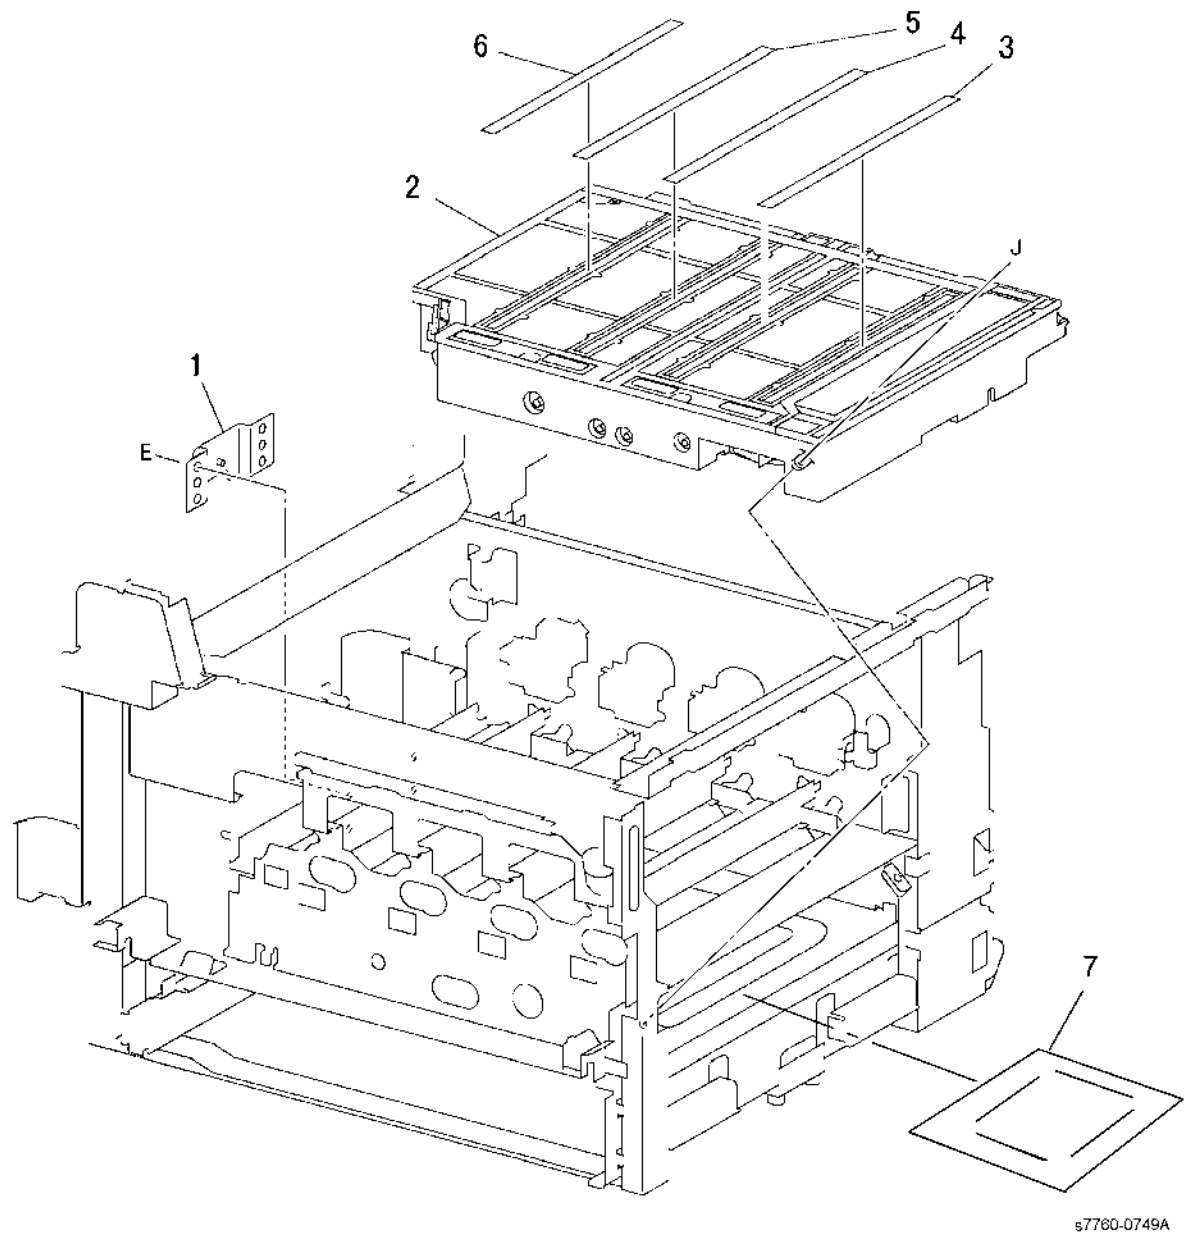

57760-0749A

PL 4.1 Xerographic Module: 1 of 2

Item	Part	Description
1	—	Waste Toner Cartridge Cover (REP 9.3)
2	108R00579	Waste Toner Cartridge
3	003K86123	Sensor Holder Assembly
4	—	Lever (P/O PL 4.1 Item 3)
5	—	Waste Toner Cartridge Interlock Switch (P/O PL 4.1 Item 3)
6	—	Holder (P/O PL 4.1 Item 3)
7	108R00713	Imaging Unit
8	127K29244	Motor Assembly Agitator (REP 9.13)
9	—	Bracket (P/O PL 4.1 Item 8)
10	—	Agitator Motor (P/O PL 4.1 Item 8)
11	604K16630	Full Toner Sensor (REP 9.5) (part of Sensor Kit)
12	—	Wire Harness (P/O PL 4.1 Item 3)
13	—	Damper (P/O PL 4.1 Item 8)
14	—	Screw (P/O PL 4.1 Item 8)
15	—	Inner Cover (Not Spared)
16	—	Bracket (Not Spared)

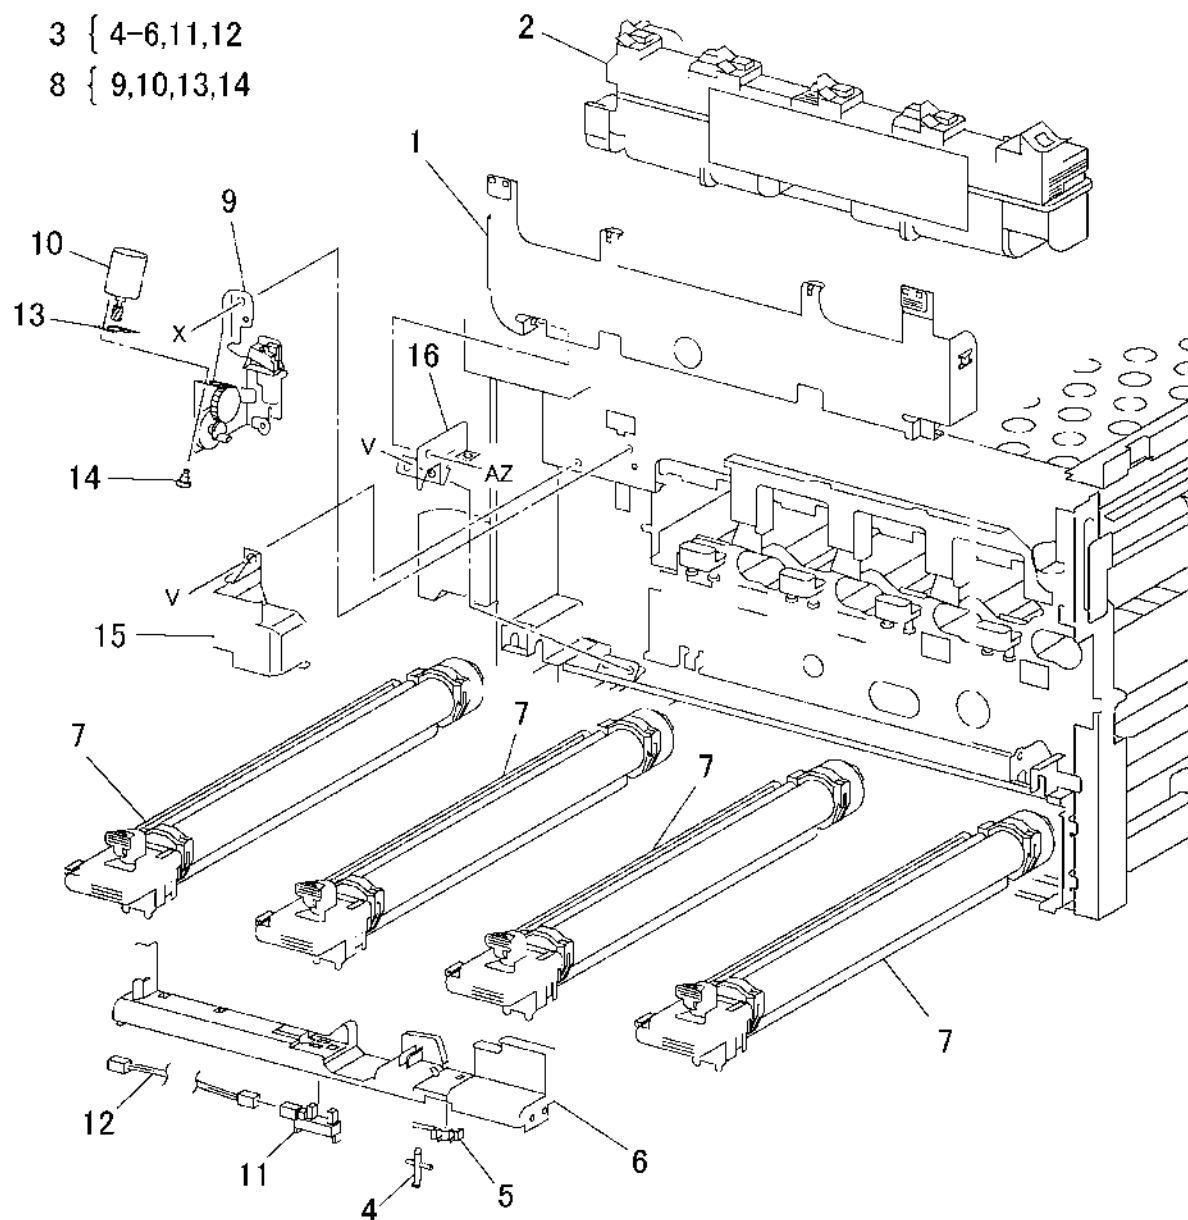


s7760-0750A

PL 4.2 Xerographic Module: 2 of 2

Item	Part	Description
1	015K65012	Plate Assy XERO (Imaging Unit Plate Assy) (REP 9.8)
2	—	Wire Harness (P/O PL 4.2 Item 1)
3	—	Xero PLate (P/O PL 4.2 Item 1)
4	—	Block (M, C, K) (P/O PL 4.2 Item 1)
5	—	Block (Y) (P/O PL 4.2 Item 1)
6	122K93331	Erase Asst Rail (Erase Lamp w/Rail) (Y, M, C)
7	122K93341	Erase Asst Rail (Erase Lamp w/Rail) (K)
8	—	Bracket (Not Spared)
9	—	Screw (Not Spared)


1 { 2 - 5

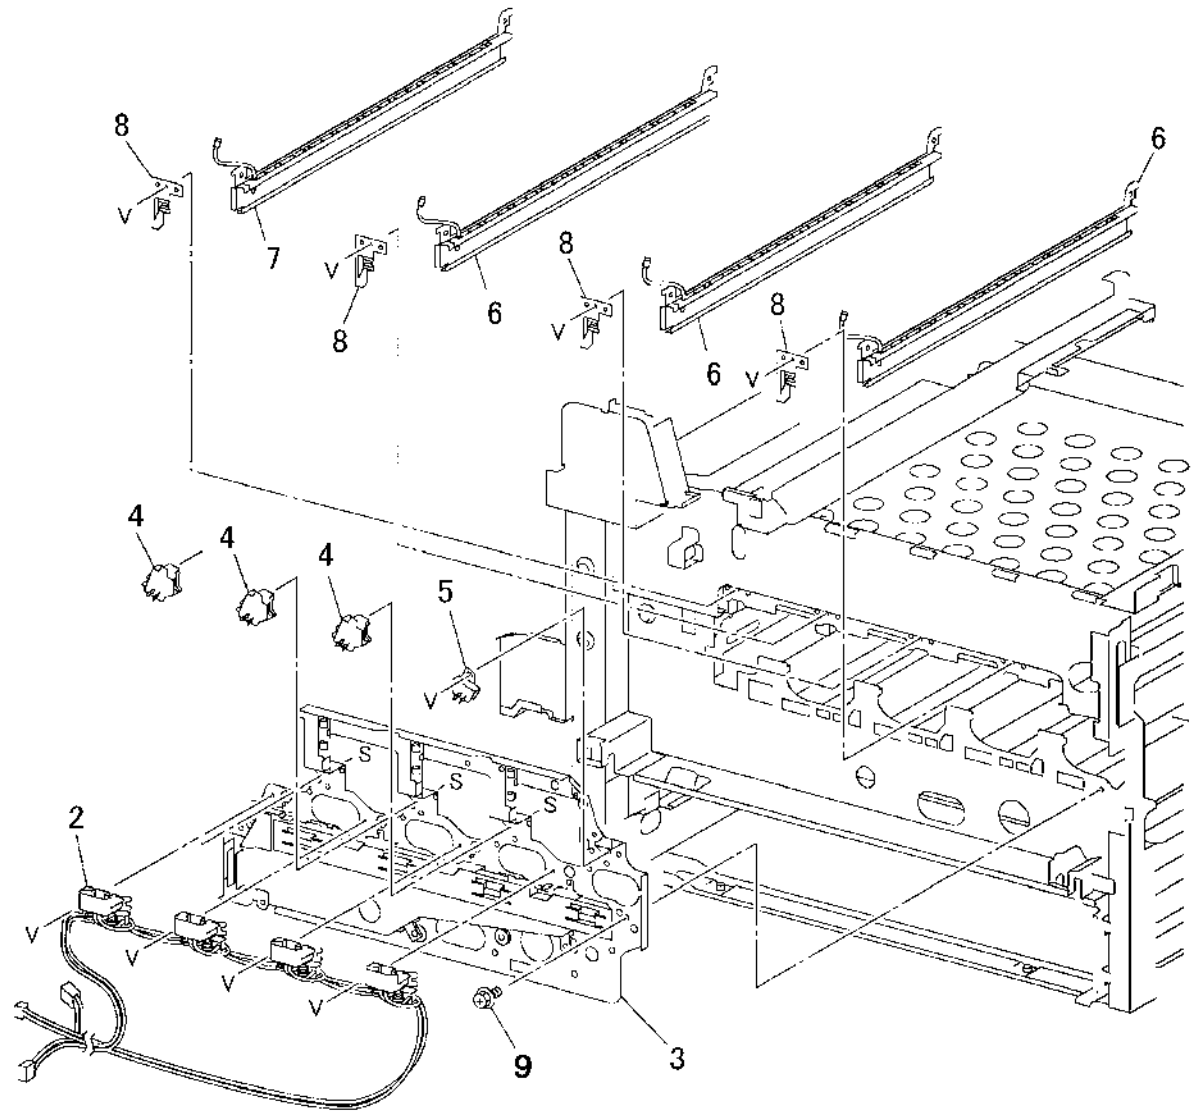

s7760-0751A

PL 5.1 Lift Unit


Item	Part	Description
1	001K70543	Frame Assy-Lift LH (Left Lift Assy) (REP 9.21)
2	001K70552	Frame Assy-Lift RH (Right Lift Assy) (REP 9.20)
3	413W66150	Bearing
4	028E93620	Washer
5	—	Plate (Not Spared)
6	003K11672	Latch Assy-AST
7	003E52291	Hinge-Handle LH (Left Hinge) (REP 9.19)
8	003E52301	Hinge-Handle RH (Right Hinge) (REP 9.19)
9	006E71740	Shaft-Main
10	011K94970	Lever Assy-Main (REP 9.18)
11	—	IBT Cam Lever (P/O PL 5.1 Item 10)
12	—	Bearing (P/O PL 5.1 Item 10)
13	—	Left Cap (P/O PL 5.1 Item 10)
14	—	Right Cap (P/O PL 5.1 Item 10)
15	—	Grip (P/O PL 5.1 Item 10)
16	003K12910	Stoper Assy-Label

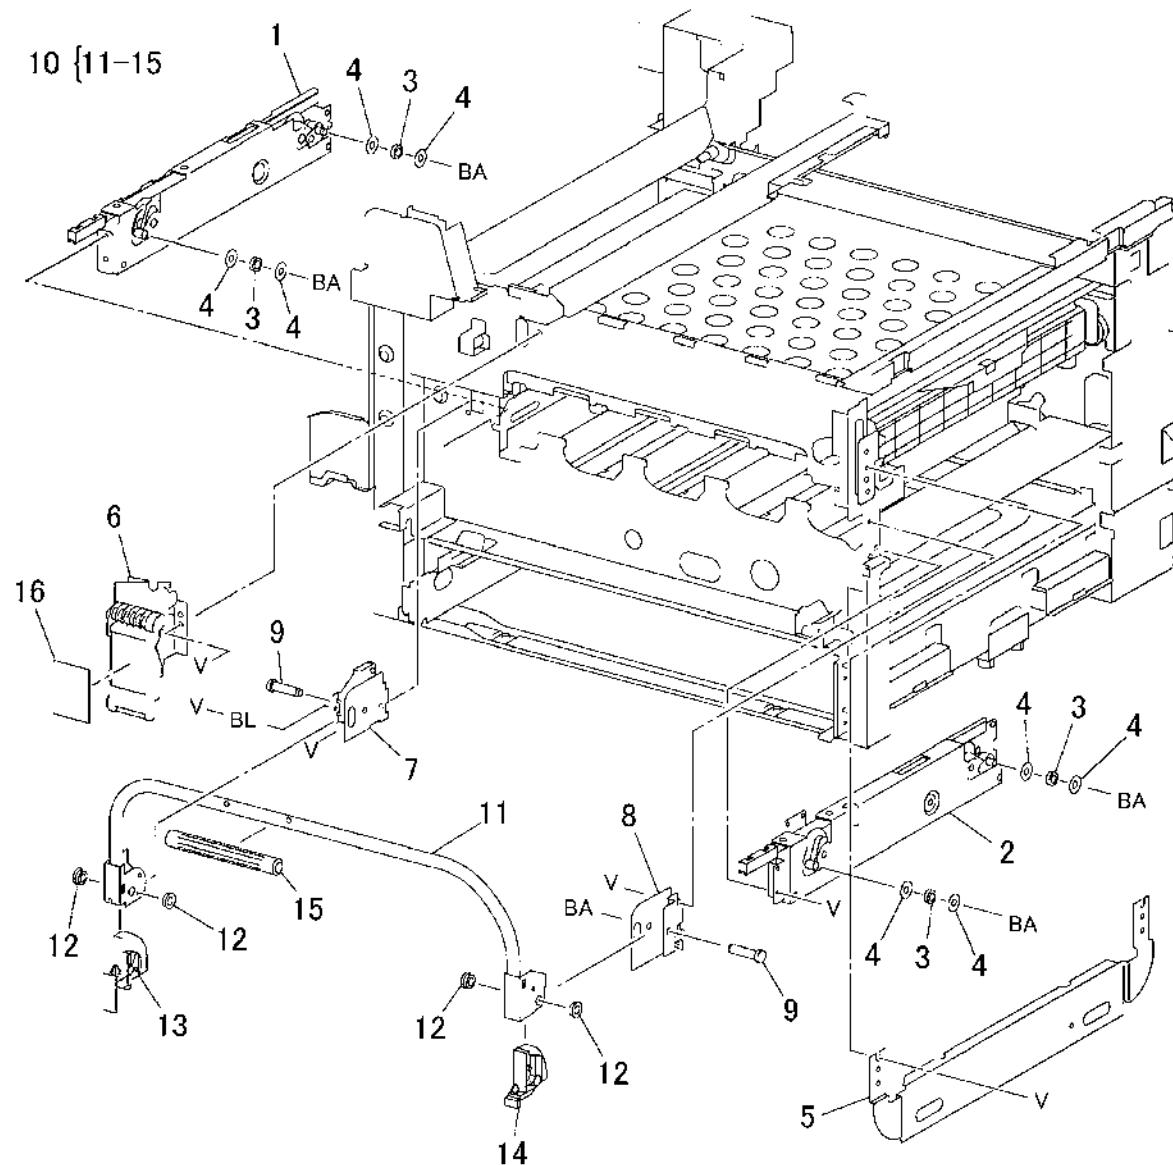

s7760-0752A

PL 5.2 IBT Unit


Item	Part	Description
1	604K15322	Kit IBT-Unit OPB (Accumulator Belt Assembly) (REP 9.15)
2	802K12951	Auger Assembly (REP 9.17)
3	—	Bearing (Not Spared)
4	007E61910	Gear (14T)
5	007E61890	Gear (18T)
6	—	Shaft (Not Spared)
7	108R00580	IBT Belt Cleaner Assembly (Accumulator Belt Assembly) (REP 9.16)
8	—	Removal Support

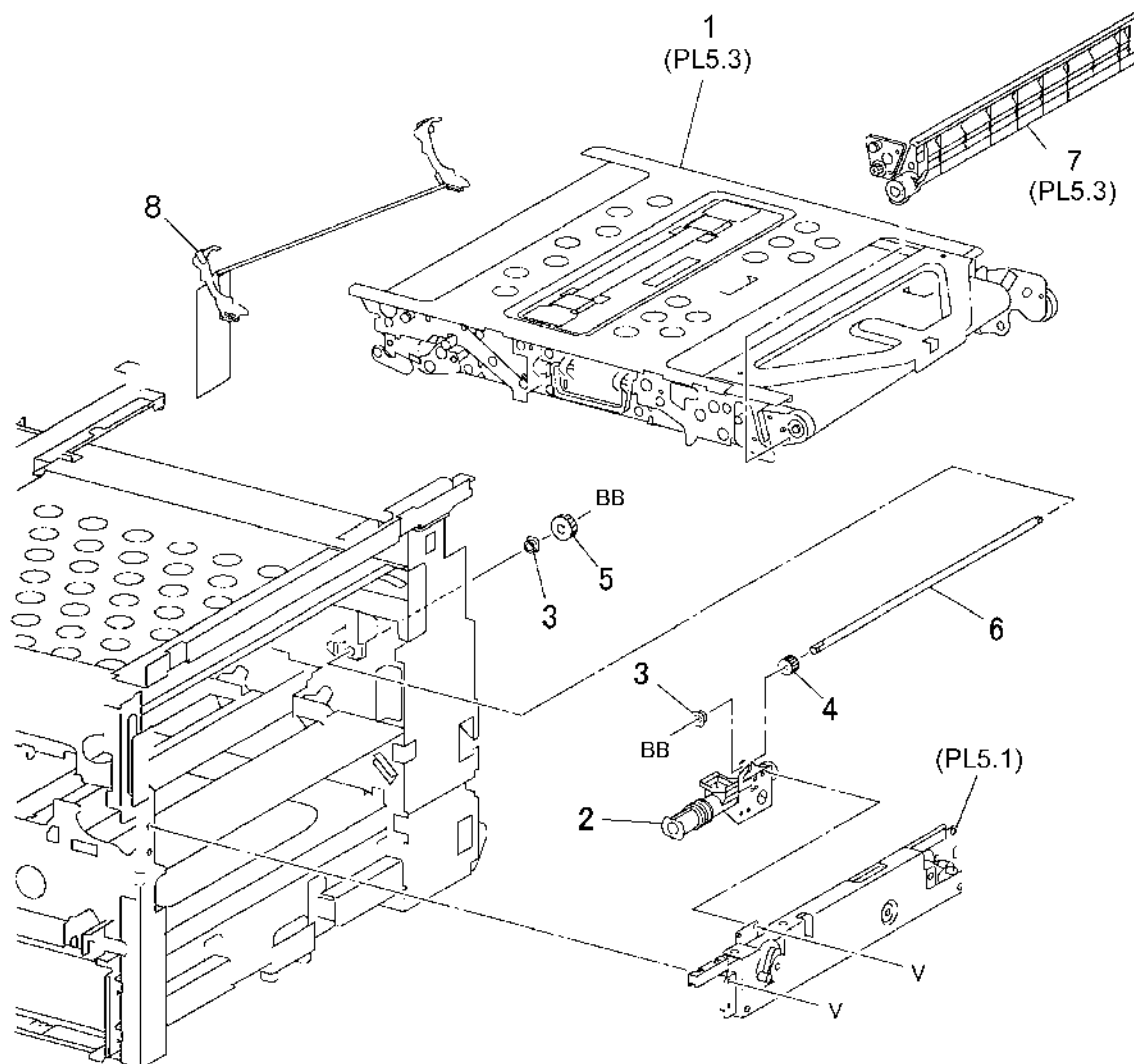

s7760-0753A

PL 5.3 IBT Belt Assembly (Accumulator Belt Assembly)


Item	Part	Description
1	064K91451	Transfer Belt (REP 9.22)
2	—	Blade (P/O PL 5.2 Item 7)
3	—	Seal (P/O PL 5.2 Item 7)
4	—	Screw (P/O PL 5.2 Item 7)
5	—	Spring (P/O PL 5.2 Item 7)
6	—	Housing (P/O PL 5.2 Item 7)
7	—	Screw (P/O PL 5.2 Item 1)
8	—	Support (P/O PL 5.2 Item 1)
9	—	IBT Frame (P/O PL 5.2 Item 1)
10	—	Right Handle (P/O PL 5.2 Item 1)
11	—	Left Handle (P/O PL 5.2 Item 1)
12	—	Bracket (P/O PL 5.2 Item 1)
13	—	Housing (P/O PL 5.2 Item 1)
14	—	Housing (P/O PL 5.2 Item 1)
15	—	Backup Roll
16	—	Bearing (P/O PL 5.2 Item 1)
17	—	Pre Roll (P/O PL 5.2 Item 1)
18	—	Bearing

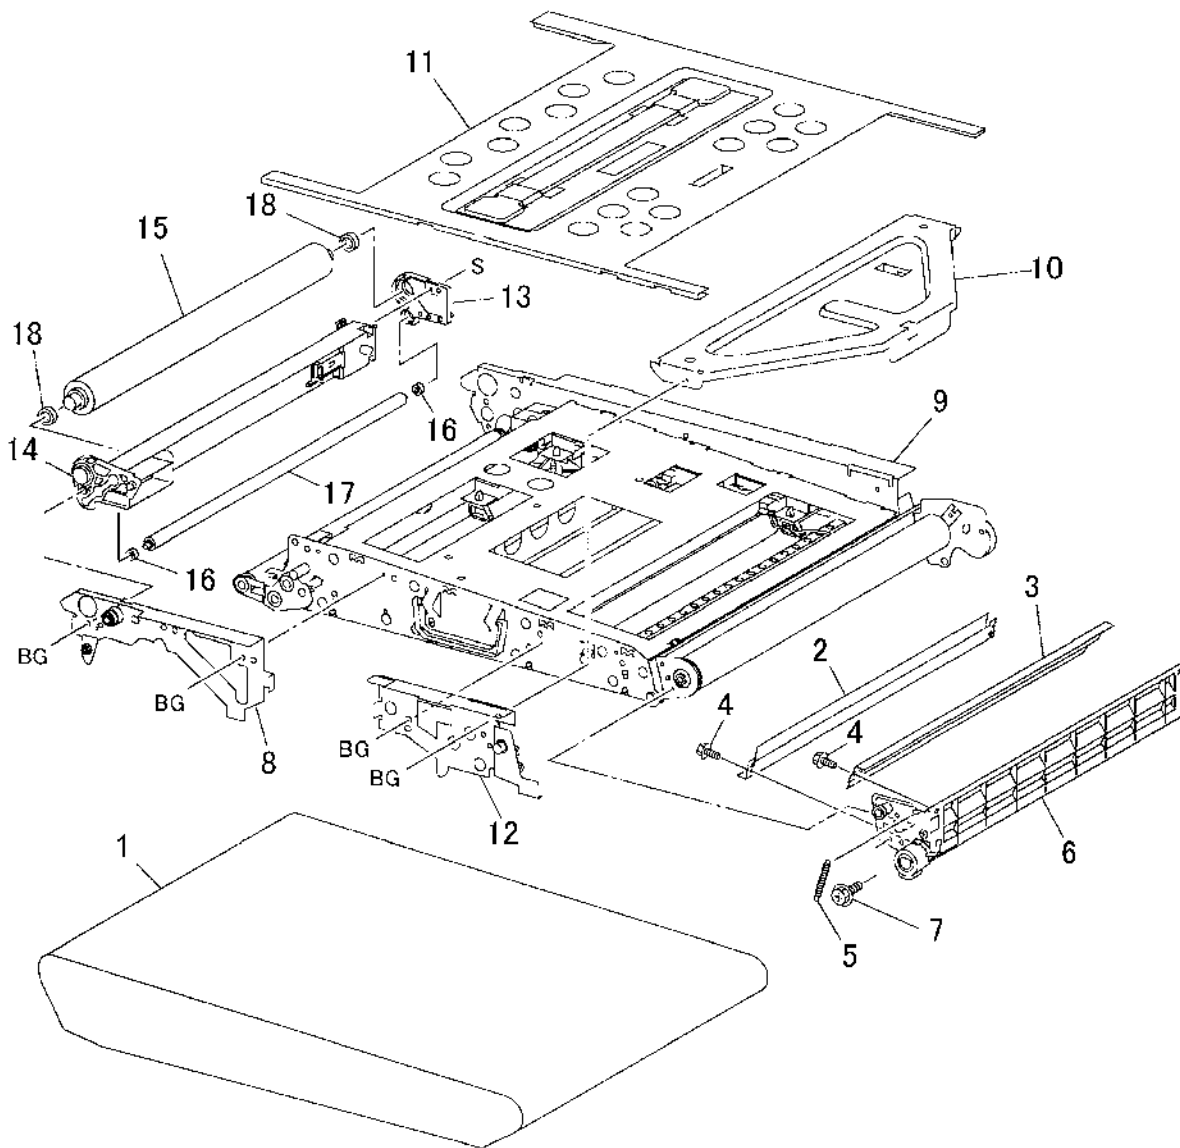

s7760-0754A

PL 5.6 IBT Elevator


Item	Part	Description
1	—	Spring
2	—	Rear Plunger
3	—	Front Plunger
4	001K70083	IBT Elevator Frame

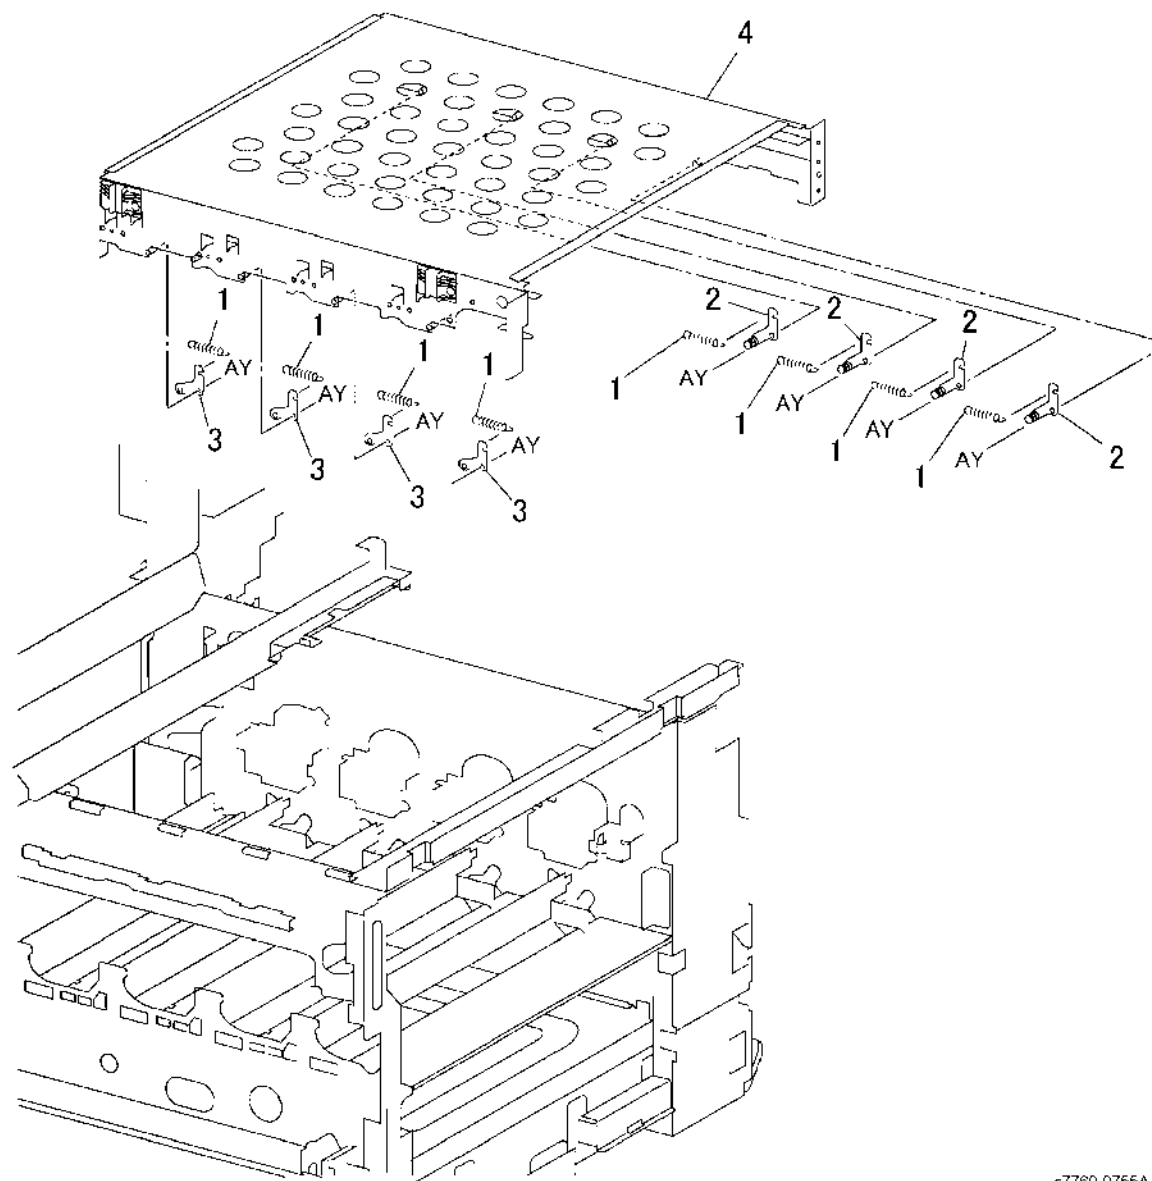

s7760-0755A

PL 6.1 Developer Unit: 1 of 2


Item	Part	Description
1	802K63551	Disp Assy Y KU (Toner Dispenser) (Y) (REP 9.7)
2	106R01162	Toner Cartridge (Y)
3	802K63561	Disp Assy M KU (Toner Dispenser) (M) (REP 9.7)
4	106R01161	Toner Cartridge (M)
5	802K63571	Disp Assy C KU (Toner Dispenser) (C) (REP 9.7)
6	106R01160	Toner Cartridge (C)
7	802K63581	Disp Assy K KU (Toner Dispenser) (K) (REP 9.7)
8	106R01163	Toner Cartridge (K)
9	802K86531	Toner Dispenser Base Assembly (REP 9.11)
10	—	Toner Dispenser Base (P/O PL 6.1 Item 9)
11	—	Gear (P/O PL 6.1 Item 9)
12	—	Toner Dispenser Motor (Y, M, C)
13	—	Toner Dispenser Motor (K)
14	—	Shaft (P/O PL 6.1 Item 9)
15	—	CRUM Antenna PWB

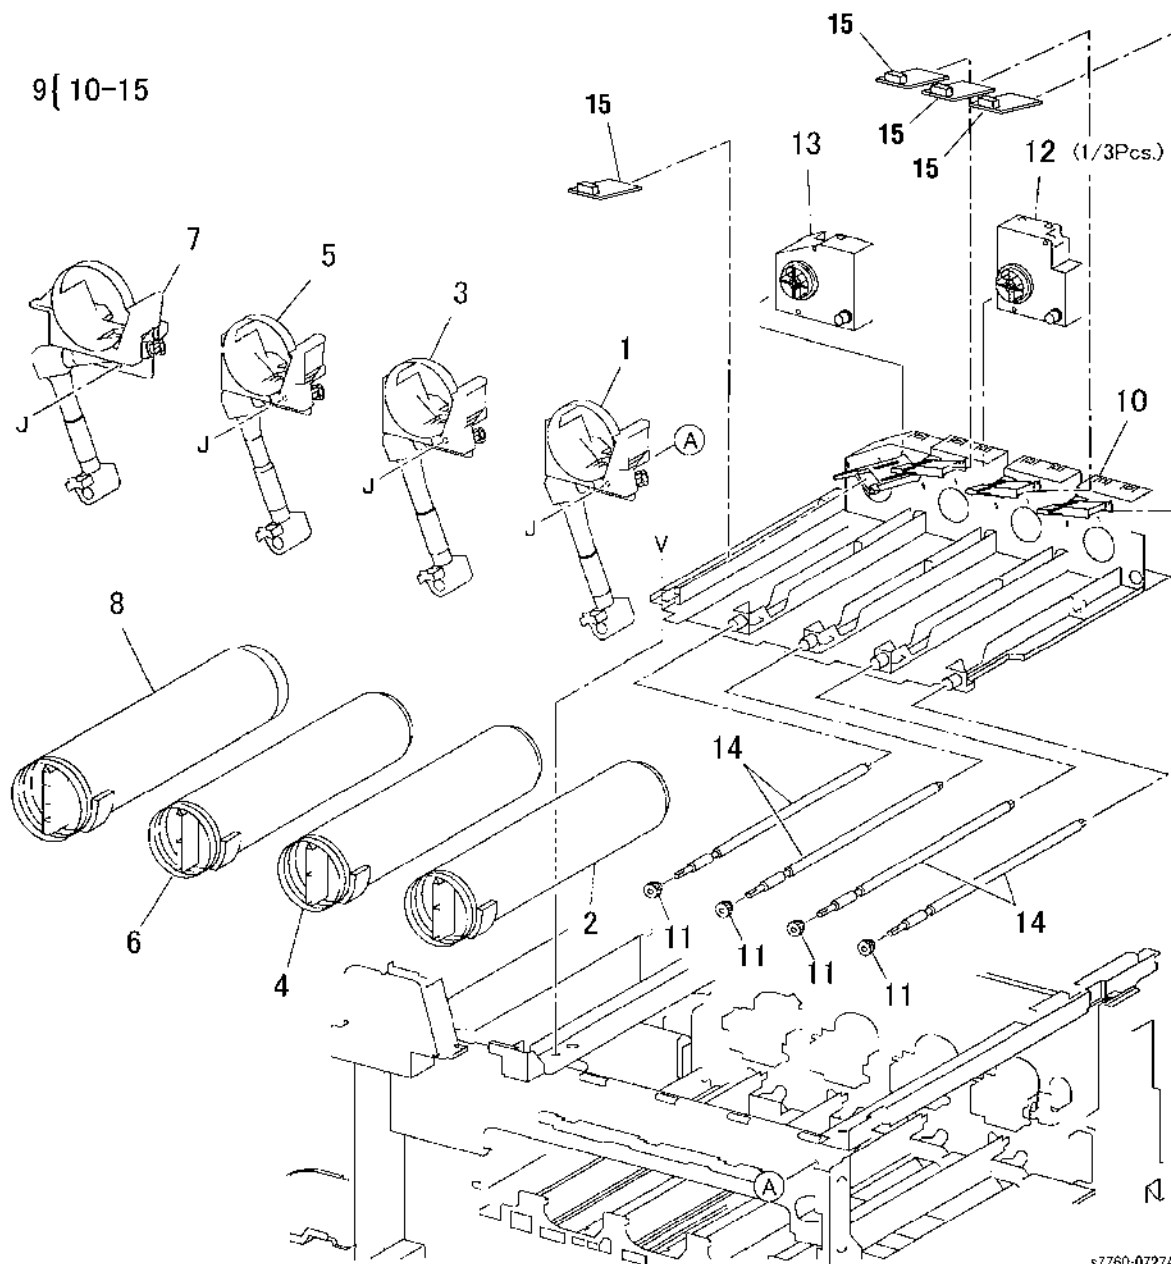

PL 6.2 Developer Unit: 2 of 2

Item	Part	Description
1	802K60194	HSG Assy Deve (Developer Housing) (Y, M, K, C) (REP 9.9)
2	—	Developer Housing (P/O PL 6.2 Item 1)
3	—	ATC Sensor (Y, M, K, C) (REP 9.26)
4	—	Seal
5	675K09680	Developer (K) (REP 9.10)
6	675K09650	Developer (Y) (REP 9.10)
7	675K09660	Developer (M) (REP 9.10)
8	675K09670	Developer (C) (REP 9.10)


1 { 2 - 4

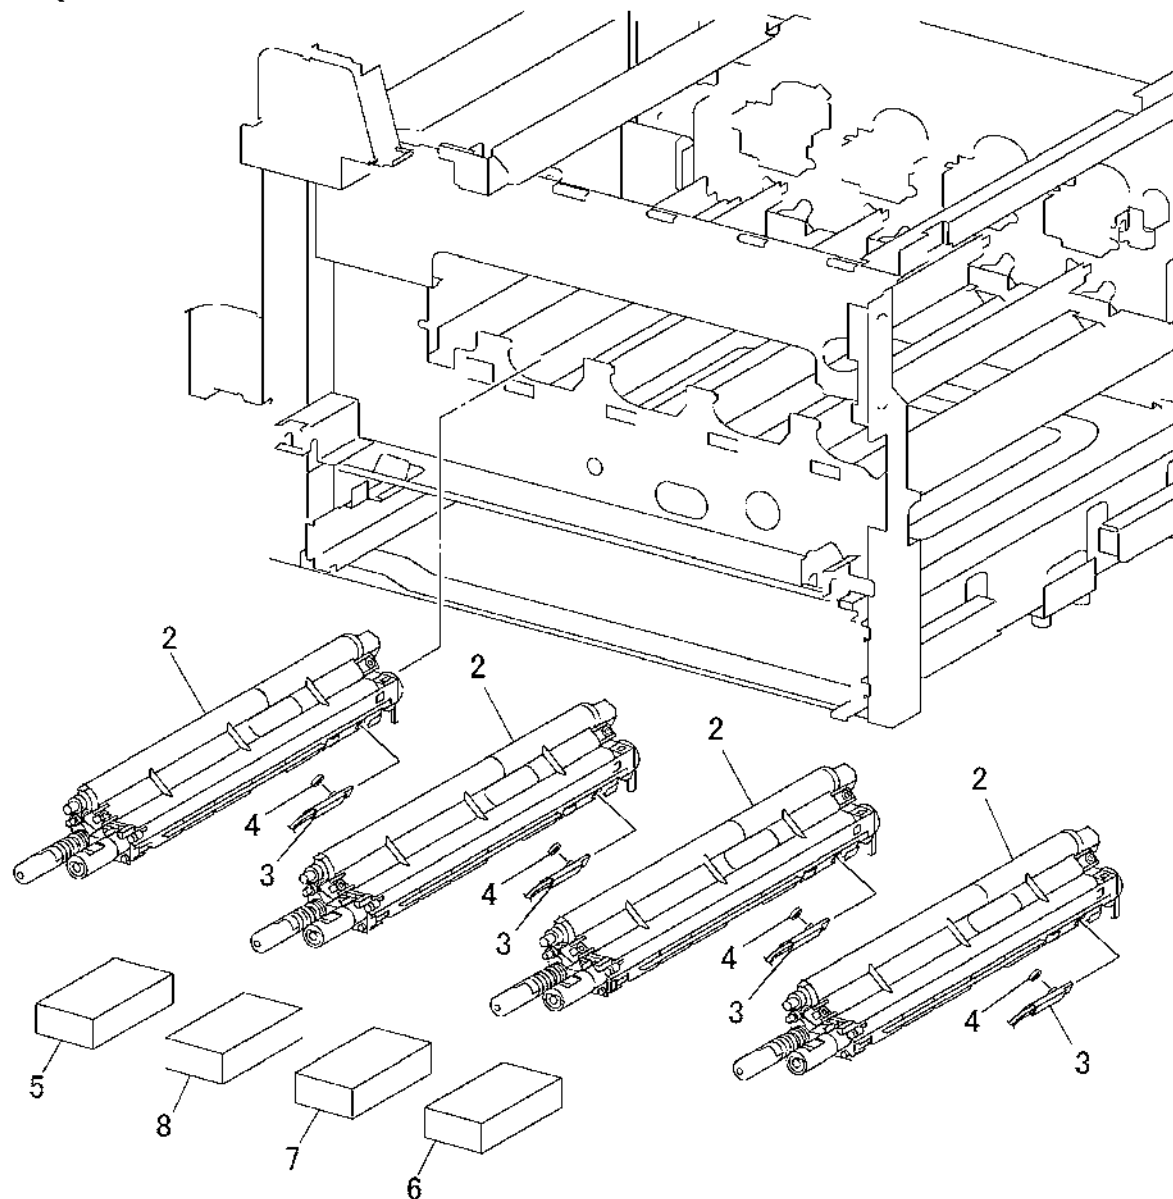

s7760-0756A

PL 7.1 Fuser Assembly


Item	Part	Description
1	115R00049	Fuser (110V)
—	115R00050	Fuser (220V)

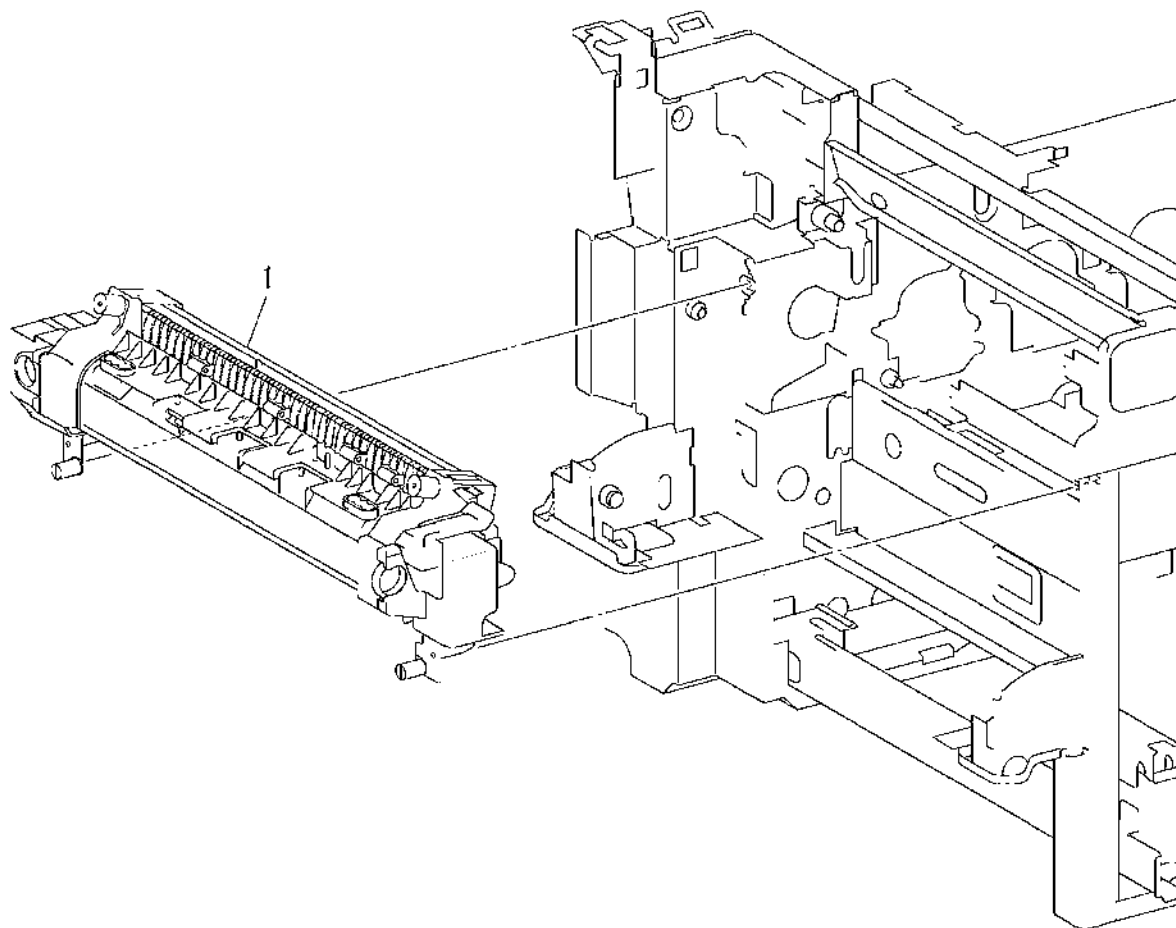

s7760-0757A

PL 8.1 Air System

Item	Part	Description
1	127K32731	Solenoid Assy-Shut (ROS Shutter Motor) (REP 9.2)
2	—	Link (Not Spared)
3	—	Spring (Not Spared)
4	802E16971	Cover-Inner, L/H, Low (REP 14.10)
5	—	Duct (Not Spared)
6	127K29341	Fan Assy Fuser (REP 10.2)
7	—	Duct (Not Spared)
8	127K50250	Fan Rear Assy (ROS Fan)
9	—	BCR Cleaning CAM
10	054K26141	Fan & Duct Assy-Bottom (Bottom Fan)
11	—	Duct (Not Spared)
12	—	Screw (Not Spared)

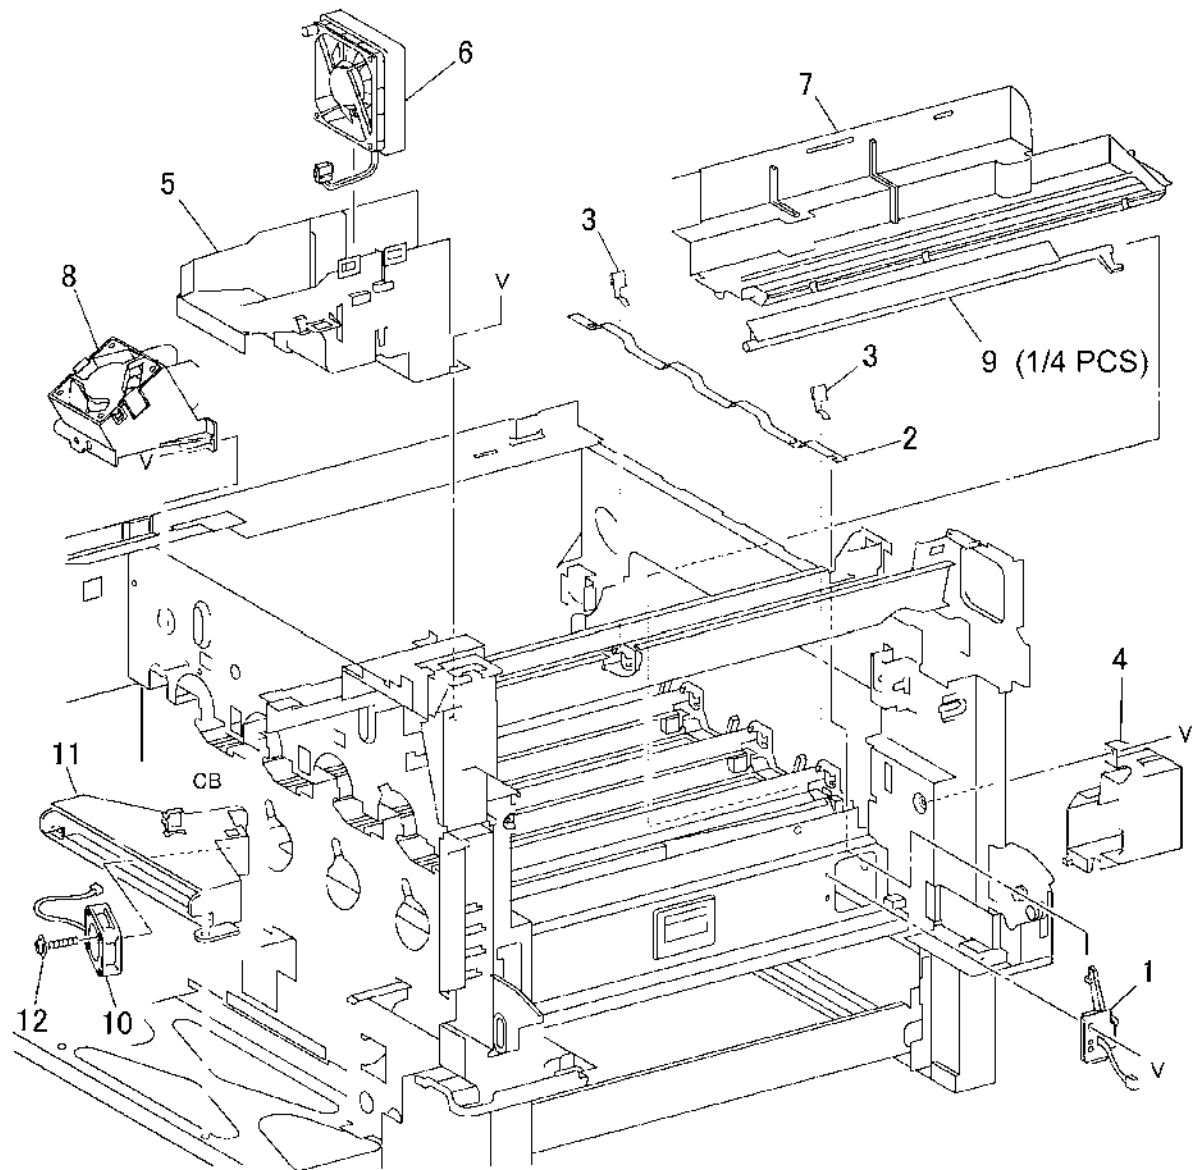


s7760-0758A

PL 9.1 Electrical Components: 1 of 3

Item	Part	Description
1	105K22140	PSHV-T10F (DEV/BTR2/DTS HVPS T10) (REP 1.7)
2	105E11972	PSHV-T11 (BCR HVPS T11) (REP 1.7)
3	—	LVPS Bracket (Not Spared) (REP 1.1)
4	127K49040	Developer Fan
5	105E16270	PSLV-LF506QR 110V (5V LVPS 110V) (REP 1.4)
—	105E16280	PSLV-LP506QR 220V) 5V LVPS 220V) (REP 1.4)
6	960K15800	PWBA MDD (Interface PWB) (REP 1.8)
7	—	Bracket (Not Spared)
8	—	Screw (Not Spared)
9	105E15190	24V LVPS (120V/220V) (REP 1.5)
10	—	24V LVPS Chassis (Not Spared) (REP 1.9)
11	127K50280	Fan Assy PSLV (LVPS Fan)
12	—	Screw (Not Spared)
13	—	HVPS Control PWB (P/O PL 9.1 Item 1)
14	105E11982	PSHV-T12 (BTR1 HVPS T12) (REP 1.10)
15	—	Connector Chassis (Not Spared)
16	—	HVPS Chassis (P/O PL 9.1 Item 1) (REP 1.6)
17	—	Choke Coil (110V)
—	—	Resistor (220V)
18	—	Mounting Bracket
19	—	Plate (Not Spared)
20	160K88292	LD Power Relay (Interlock Relay PWB)
21	—	Plate
22	—	Wire Harness


1 { 13, 16, 21

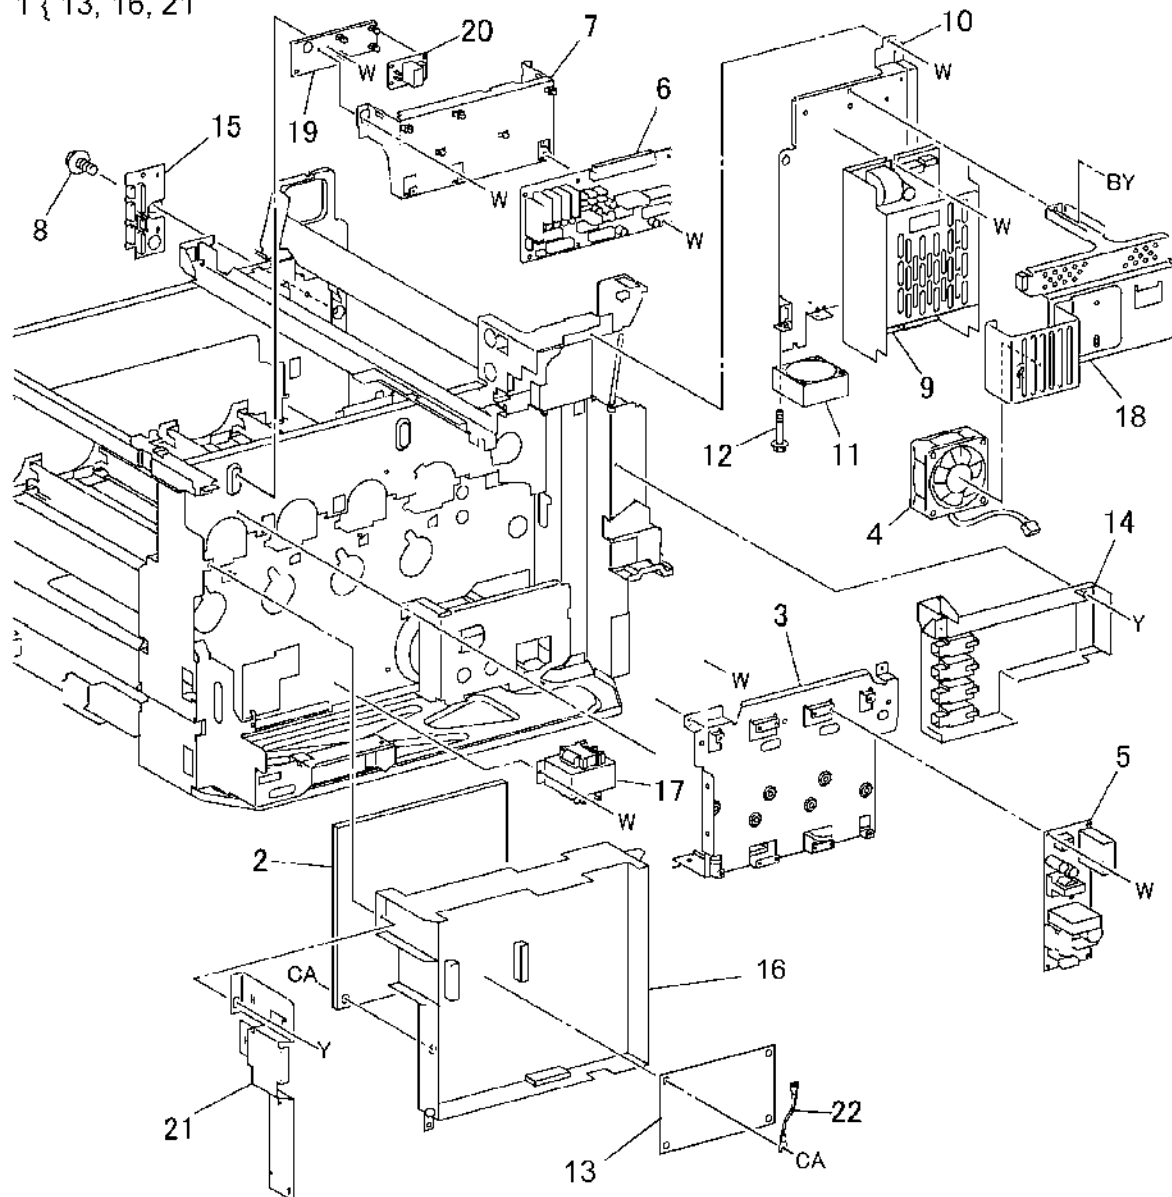

s7760-0759A

PL 9.2 Electrical Components: 2 of 3


Item	Part	Description
1	101K52401	Chasis Assy AC Power (110V)
—	101K52411	Chasis Assy AC Power (220V)
2	—	Bracket (P/O PL 9.2 Item 1)
3	—	AC Drive PWB (110V) (REP 1.11)
—	—	AC Drive PWB (220V) (REP 1.11)
4	—	Clamp (P/O PL 9.2 Item 1)
5	—	Noise Filter PWB (110V)
—	—	Noise Filter PWB (220V)
6	—	GFI Breaker
7	—	AC Power Chassis (P/O PL 9.2 Item 1)
8	—	Wire Harness (P/O PL 9.2 Item 1)
9	—	Wire Harness (P/O PL 9.2 Item 1)
10	—	Wire Harness (P/O PL 9.2 Item 1) (ACO)
11	—	Screw (P/O PL 9.2 Item 1)
12	—	Bracket (P/O PL 9.2 Item 1)
13	074K97791	Outlet Panel Assy
14	117K31400	Power Cord (110V)
—	—	Power Cord (250V, 10A) Europe
15	—	Wire Harness
16	—	Outlet

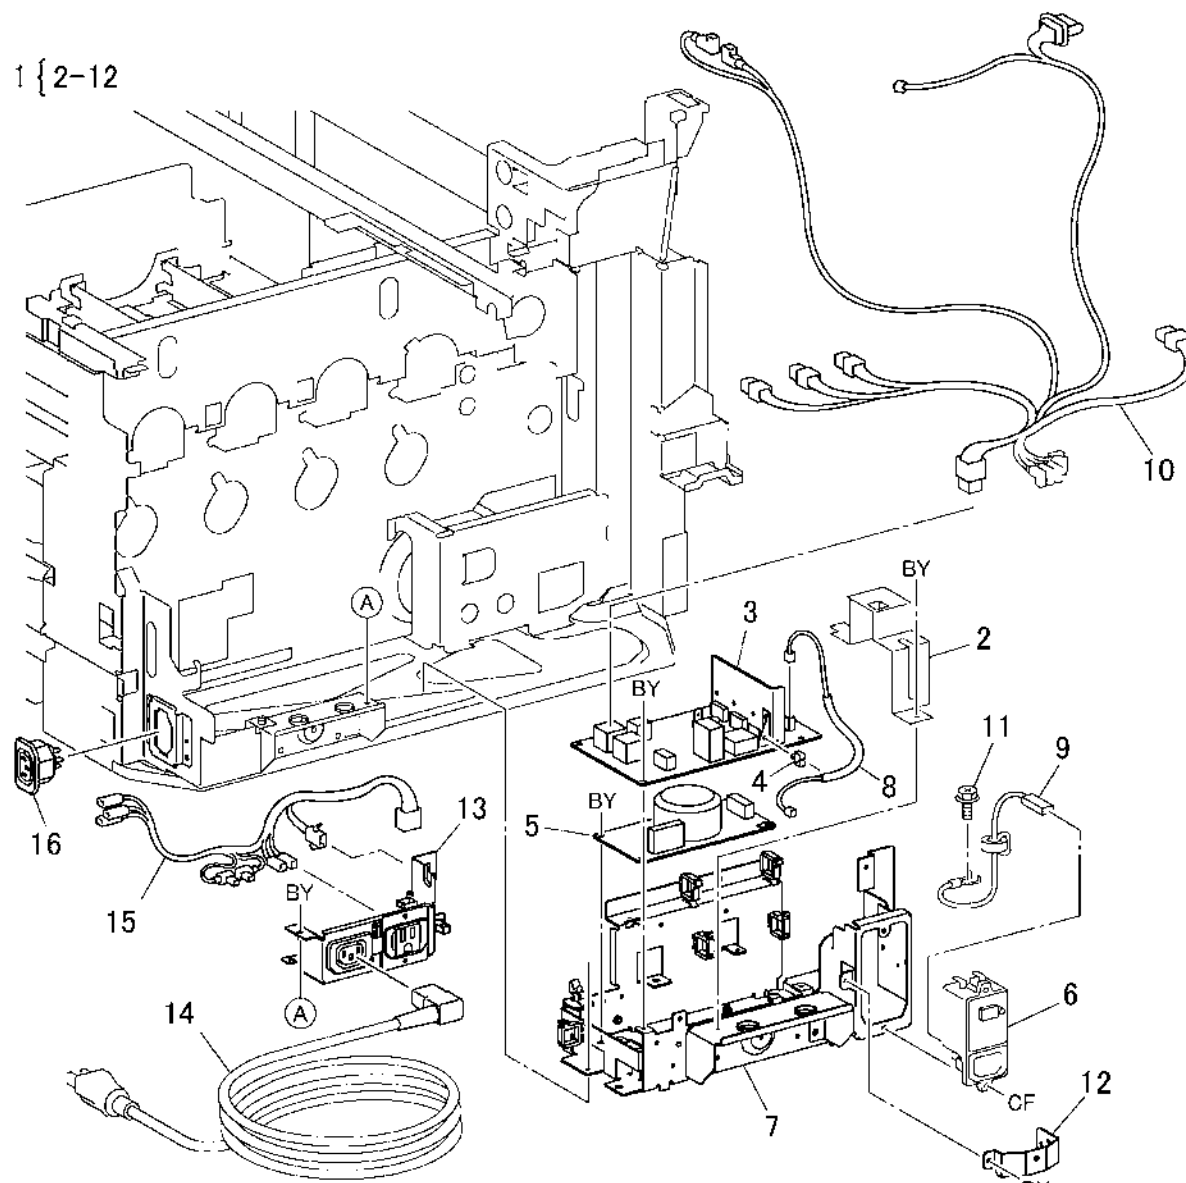

s7760-0760A

PL 9.3 Electrical Components: 3 of 3

Item	Part	Description
1	014K81604	Block Assembly (Deve)
2	162K62112	Wire Harness (XERO)
3	162K55941	Deve Wire Harness (Y, M)
4	162K55971	Deve Wire Harness (C, K)
5	162K56520	Wire Harness (2nd)
6	113K82310	DTS Connector
7	162K56031	Wire Harness (DTS)
8	962K37973	Harness Assy Main Front
-	962K37980	Harness Assy Main LH (Left)
-	962K37991	Harness Assy Main RH (Right)

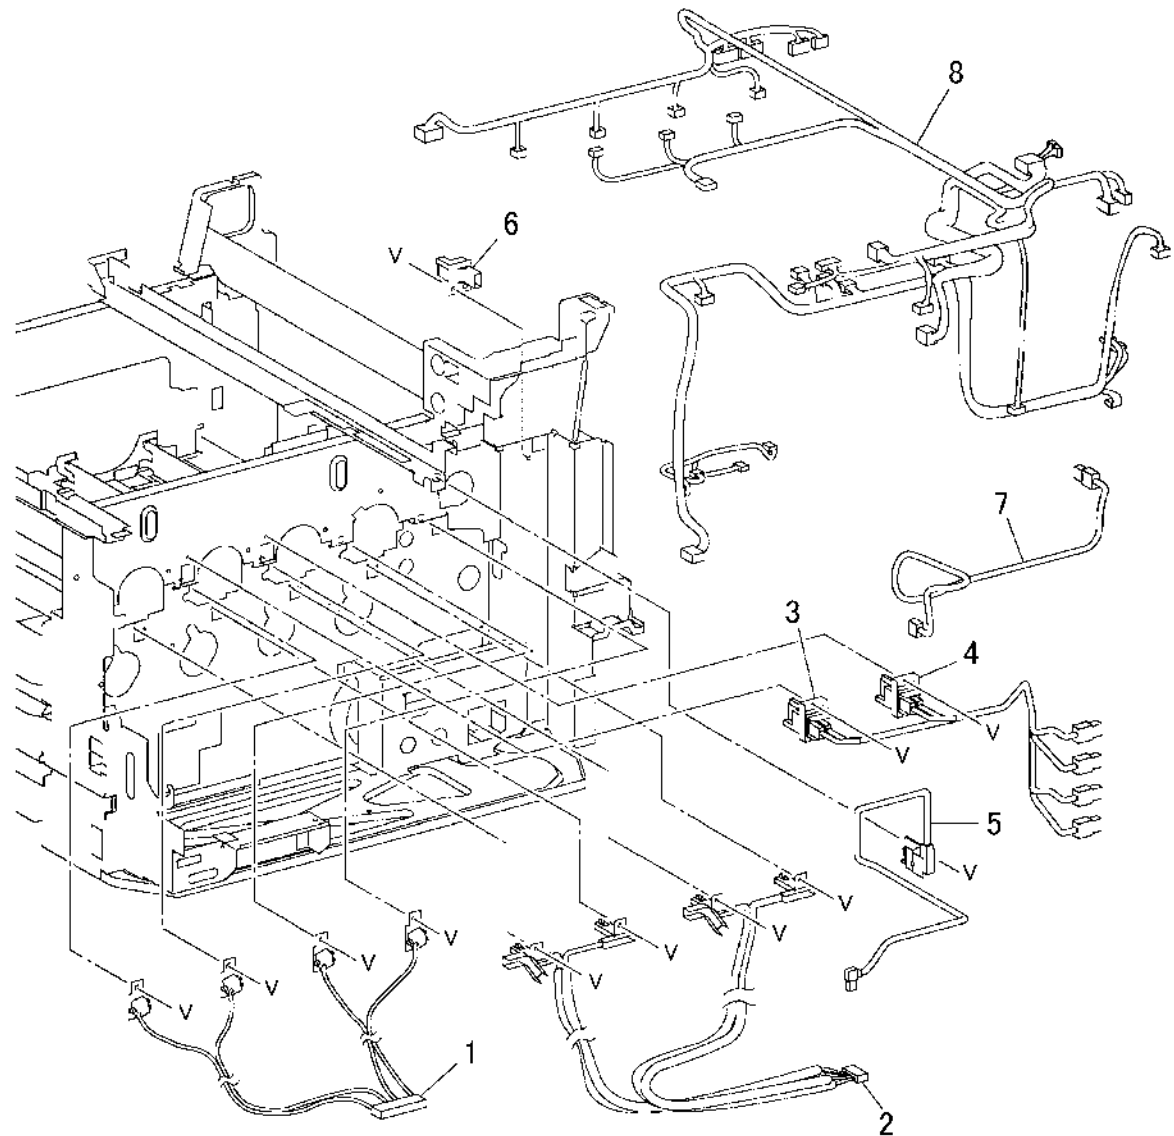


s7760-0761A

PL 10.1 Front Cover

Item	Part	Description
1	—	Logo Plate
2	—	Hinge (Not Spared)
3	802K97800	Cover Assy Front MN (with 2-10) (REP 14.7)
4	—	Front Cover (P/O PL 10.1 Item 3)
5	—	Magnet (P/O PL 10.1 Item 3)
6	830E57230	Strap
7	042K93270	Cleaner Assembly (ROS)
8	—	ROS Cleaner (P/O PL 10.1 Item 7)
9	042K92010	Cleaner Assy Base
10	—	Right Interlock Switch
11	—	Front Interlock Switch
12	802K59860	Cover Assy Right MN (Right Cover) (REP 14.3)

3 { 1, 4 - 9


7 { 8, 9

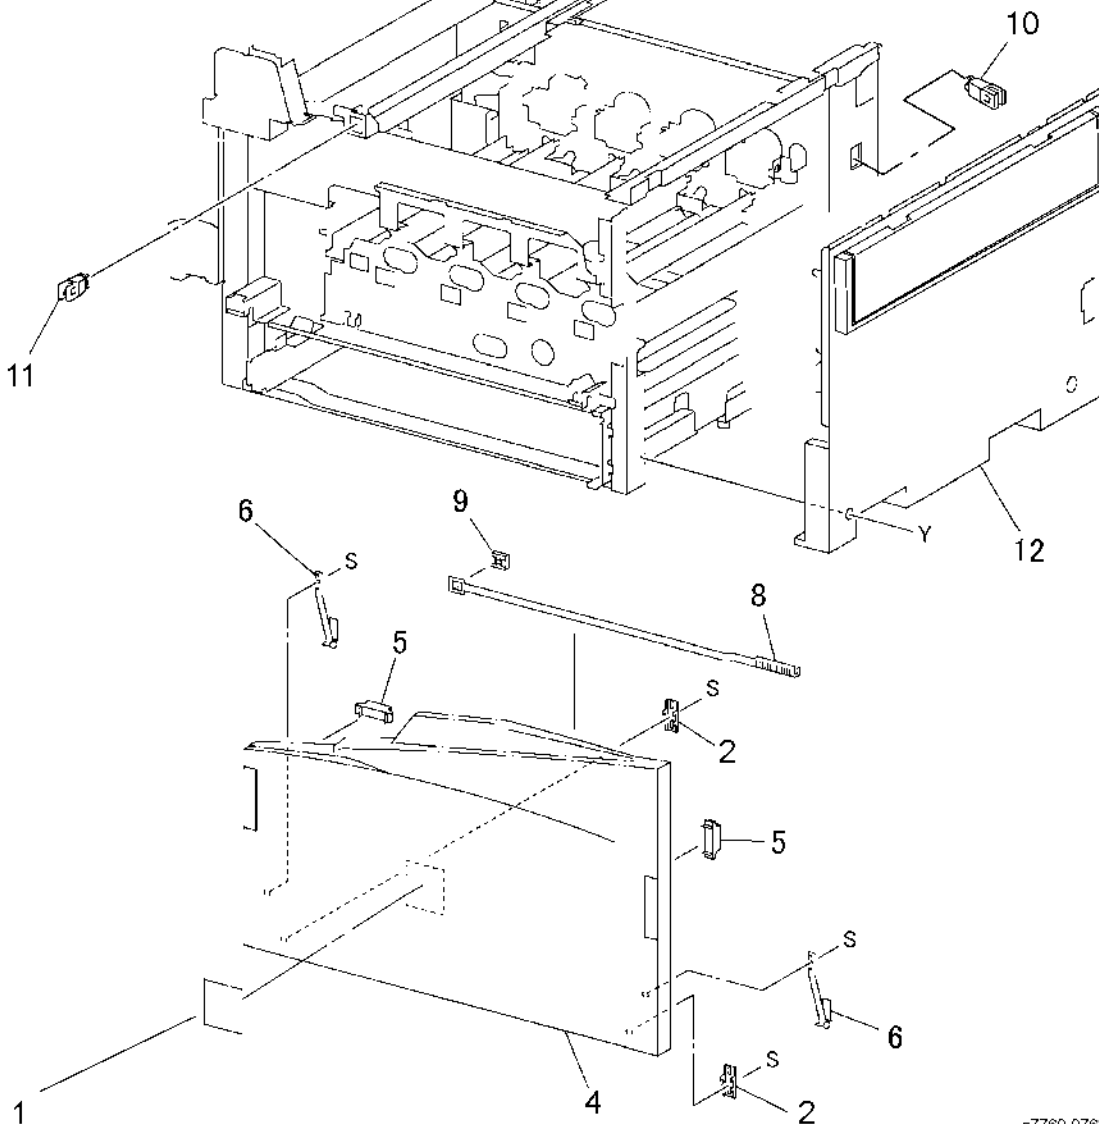

s7760-0762A

PL 10.2 Top Covers and Inner Covers

Item	Part	Description
1	802K89970	Top Cover (with 2-3) (REP 14.1)
2	—	Top Cover (P/O PL 10.2 Item 1)
3	—	Stop (P/O PL 10.2 Item 1)
4	—	Connector Cover
5	802K90821	Control Panel (P/O PL 10.2 Item 1)
6	110K11211	Main Power Switch
7	802K59881	Fuser Cover (REP 14.8)
8	—	Dispenser Cover (REP 9.6)
9	012K94261	Link Assy
10	—	Pallet Bracket
11	962K41710	Wire Harness (Not Shown)

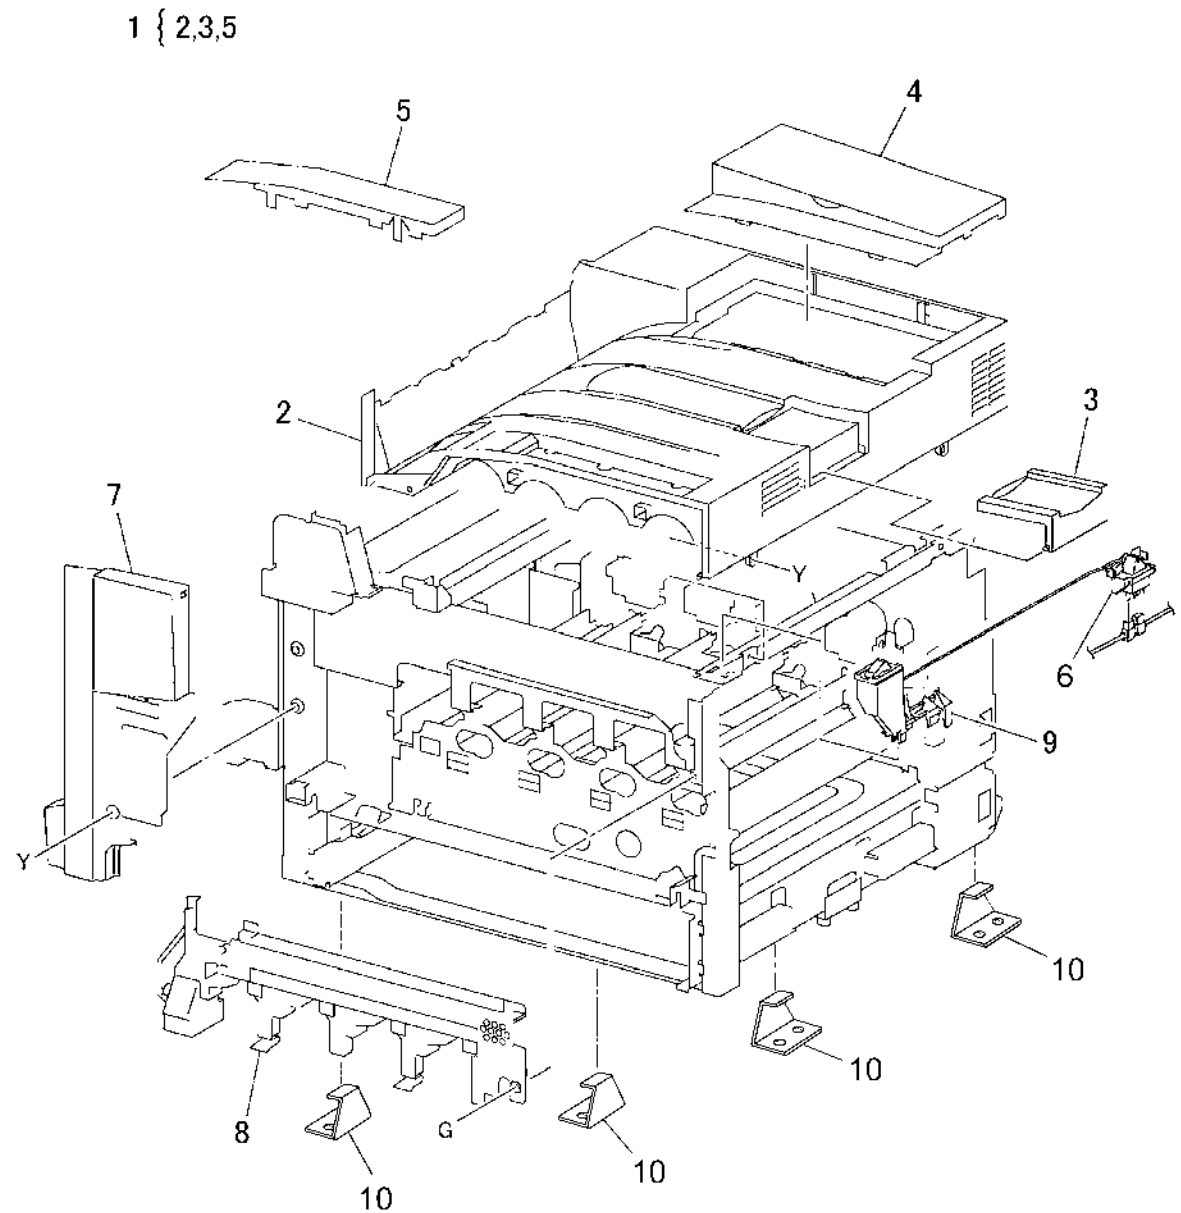


s7760-0763A

PL 10.3 Rear Cover

Item	Part	Description
1	—	Data Plate (Not Spared)
2	802E12490	Cover Blind TM
3	802K90000	Cover Assy Rear
4	—	Rear Cover (P/O PL 10.3 Item 3) (REP 14.2)
5	802E12490	Blind Cover
6	802E12501	Cover-L/H R, Mid (Rear Left Middle Cover) (REP 14.4)
7	802E14351	Cover-L/H R, Low (Rear Left Lower) Cover
8	802K59890	Cover AY-L/H F, Low MN (Front Left Cover)
9	802E27861	Cover-Top, Rear (Rear Left Upper Cover) (REP 14.5)


3 { 4, 5

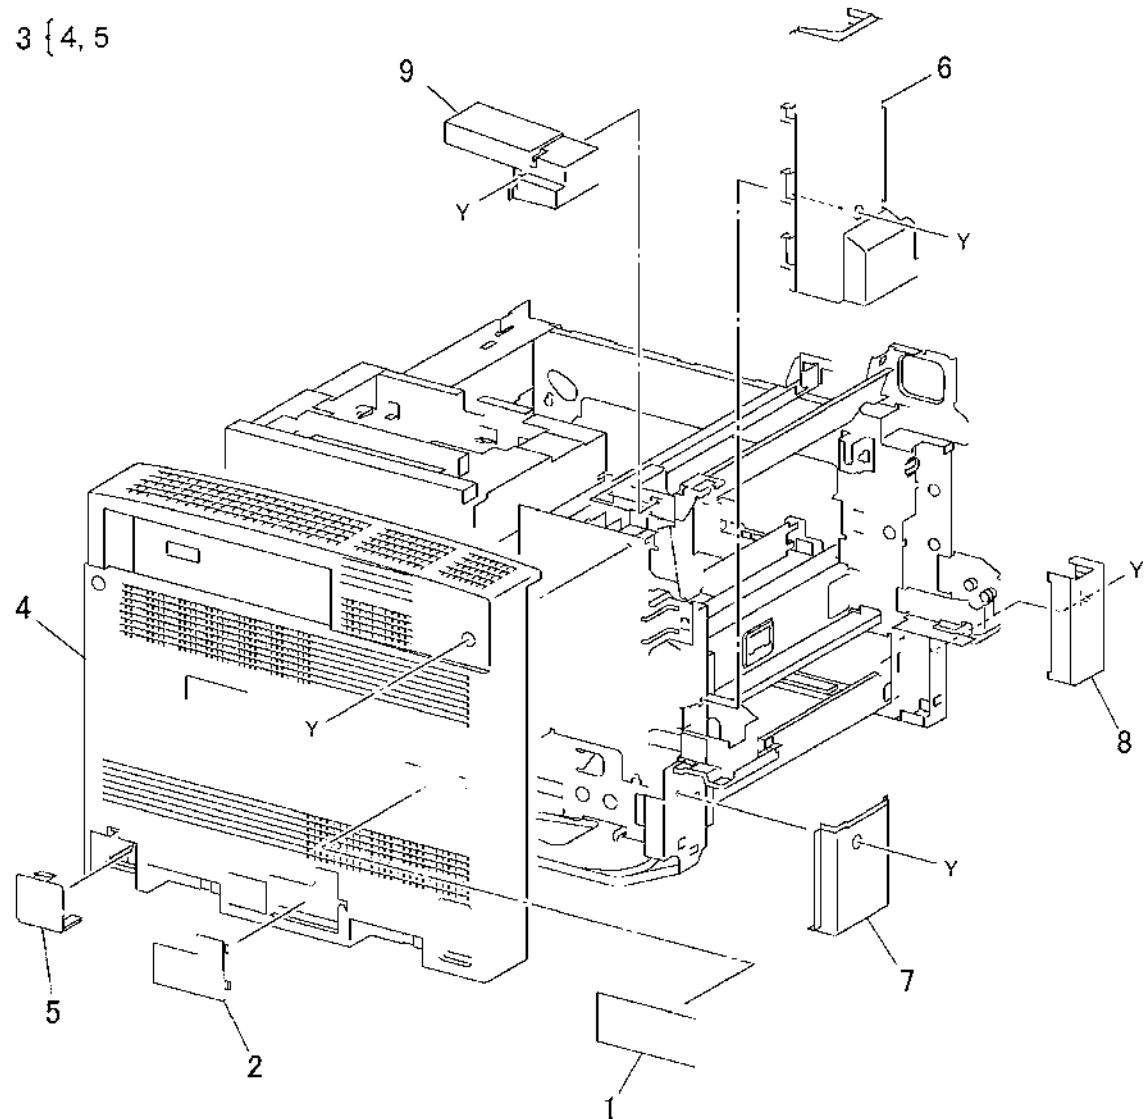

s7760-0764A

PL 11.1 Inverter Transport


Item	Part	Description
1	059K36872	Transport Assy-Inv (Inverter Transport) (REP 8.5)
2	011E10711	Interlock Actuator (not shown)

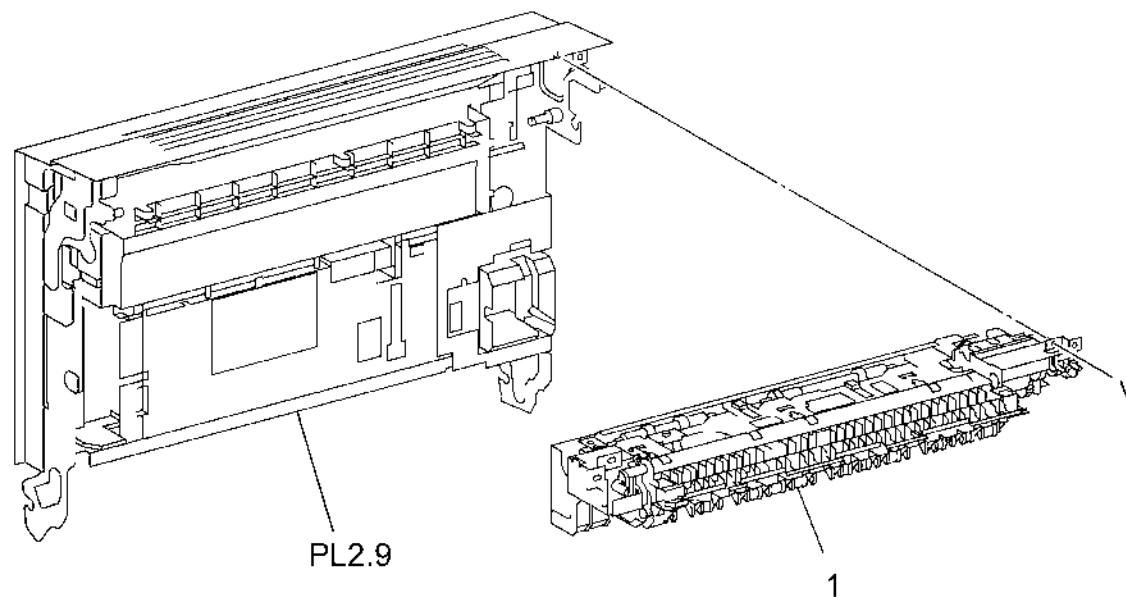

s7760-0765A

PL 12.1 Duplex Transport Assembly


Item	Part	Description
1	—	Duplex Transport Upper Cover (Not Spared)
2	059K45890	Transport Assy Duplex FT (REP 8.3)
3	—	One-way Pulley (P/O PL 12.1 Item 2)
4	—	Bearing (P/O PL 12.1 Item 2)
5	—	Bearing (P/O PL 12.1 Item 2)
6	—	Duplex Transport Roll
7	—	Handle (P/O PL 12.1 Item 2)
8	—	Lower Cover (P/O PL 12.1 Item 2)
9	—	Screw (P/O PL 12.1 Item 2)
10	—	Nylon Washer (P/O PL 12.1 Item 2)
11	—	Cover (P/O PL 12.1 Item 2)
12	—	Spring (P/O PL 12.1 Item 2)
13	—	Duplex Transport (P/O PL 12.1 Item 2)
14	—	Label (P/O PL 12.1 Item 2)
15	—	Wire Harness (Not Spared)
16	—	Bracket (Not Spared)
17	—	Screw (Not Spared)

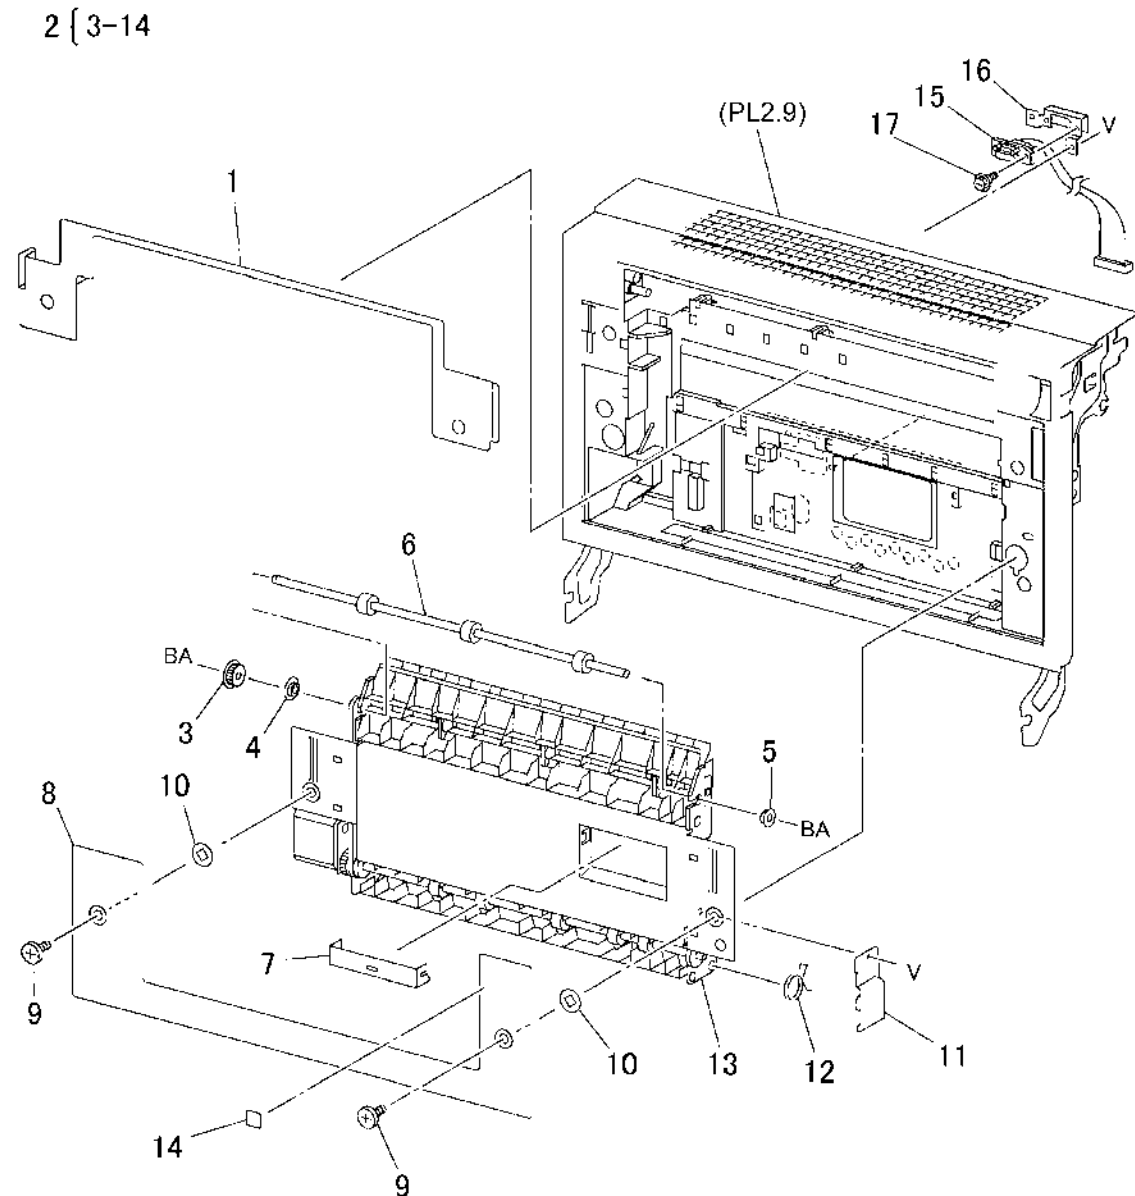

s7760-0766A

PL 13.1 IOT Control Chassis Assembly


Item	Part	Description
1	—	Rear Panel (Not Spared)
2	101K52470	Chassis Assy Elec (REP 1.3)
3	960K34661	Image Processor Board (REP 1.12)
4	—	Bridge PWB (Not Spared)
5	069E00430	Config Chip, Network
6	802K85142	Chassis Assy-ESS (includes item 8)
7	133K27690	512 MB Memory
8	127K49440	Fan Assembly ESS
9	960K22981	PWBA MCU (Engine Control) (REP 1.2)
10	—	Screw (see FRU Parts List) (Not Spared)
11	960K34661	IP Board EEPROM Chip (237E23660)
12	121E25670	Internal HD Programmed (REP 1.17)
13	—	Cover, Shield (Not Spared)
14	160K76652	MCU-NF NVM PWB (PWBA MCU NVRAM) (Engine Control)

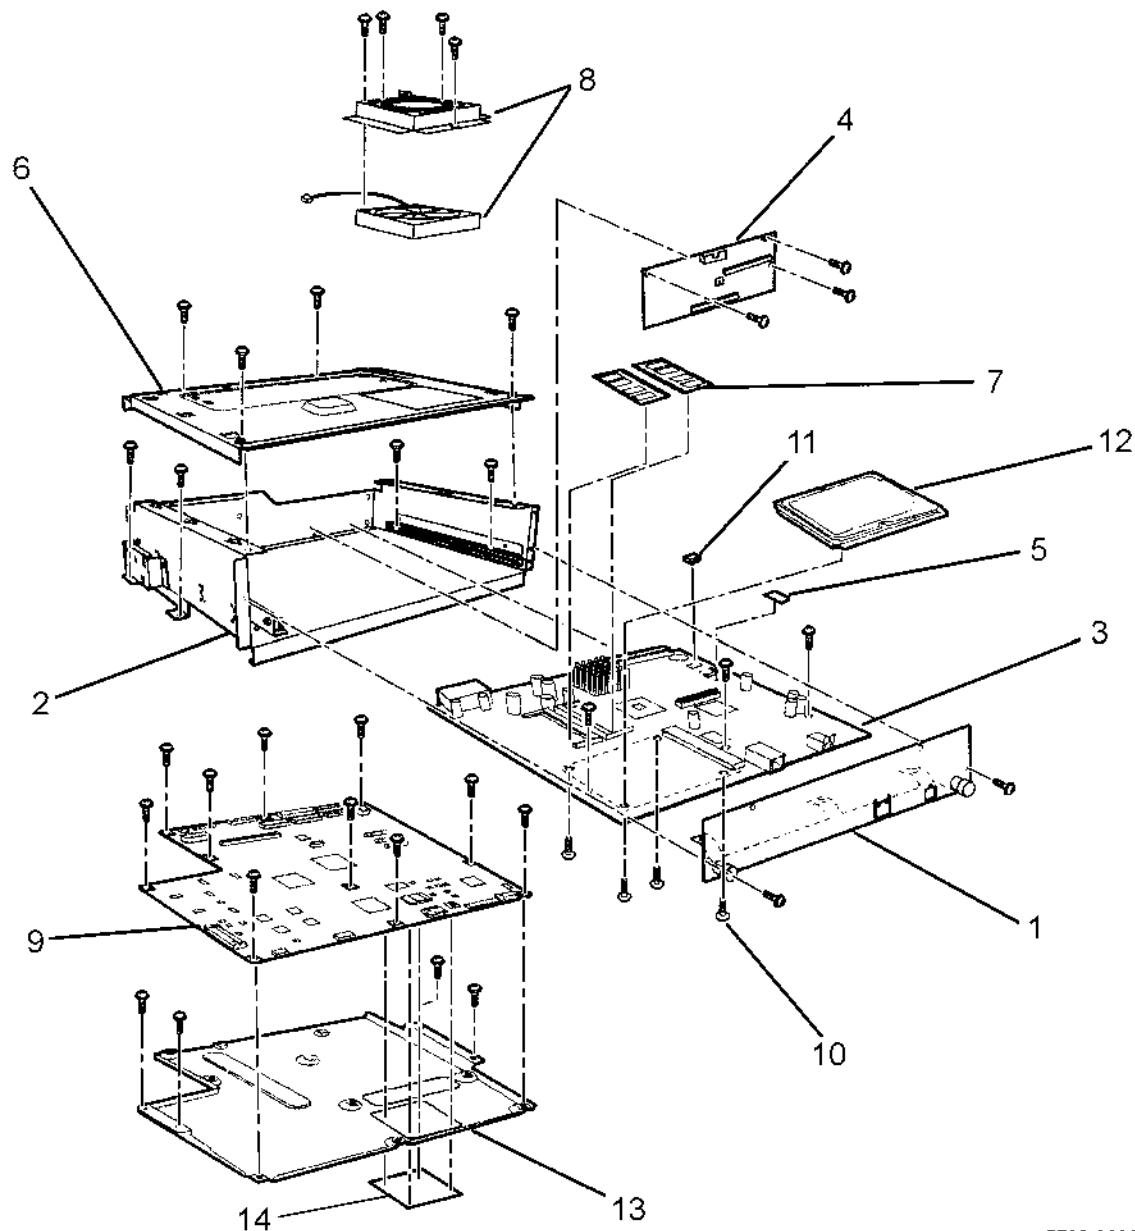

s7760-0626A

PL 15.9 Electrical Components and Casters


Item	Part	Description
1	—	Left Connecting Bracket (Not Spared)
2	—	Right Connecting Bracket (Not Spared)
3	017K93740	Caster Assy-S
4	017K93750	Caster Assy
5	—	Foot (Not Spared)
6	—	Bracket (Not Spared)
7	960K01342	Tray 3 Module PWB
—	—	3TM PWB
8	127K36021	Motor Assy-3TM (Takeaway Motor 1)
9	—	Gear (23/46T)
10	—	Gear (46T)
11	—	Gear (33T)

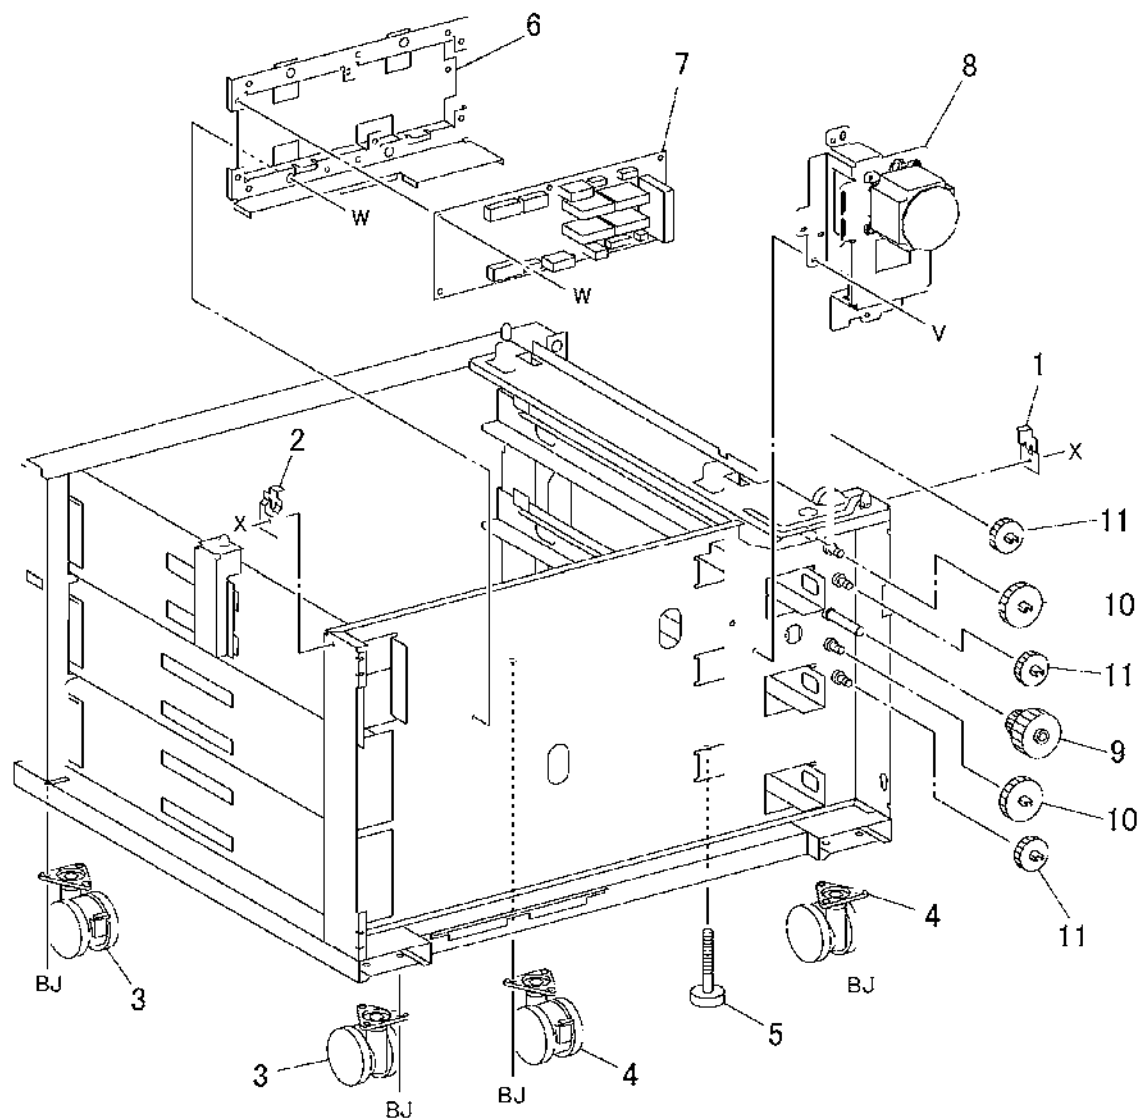

s7760-0774A


PL 15.10 Left Cover Assembly

Item	Part	Description
1	802K65591	Cover Assy LH 3TM (Left Cover Assembly) (REP 14.11)
2	—	Shaft
3	—	Hook
4	—	Handle
5	—	Left Cover (Left Hand Door C) (P/O PL 15.10 Item 1)
6	—	Support (P/O PL 15.10 Item 1)
7	—	Cover (P/O PL 15.10 Item 1)
8	—	Actuator (P/O PL 15.10 Item 1)
9	—	Spring
10	—	Bearing (P/O PL 15.10 Item 1)
11	—	Spring
12	—	Bearing (P/O PL 15.10 Item 1)
13	—	Bearing (P/O PL 15.10 Item 1)
14	—	Roll (P/O PL 15.10 Item 1)
15	—	Bracket (P/O PL 15.10 Item 1)
16	—	Spring
17	—	Cover (Not Spared)
18	—	Chute (Not Spared)
19	604K16630	Takeaway Sensor (part of Sensor Kit)
20	—	Wire Harness
21	—	Bearing (Not Spared)
22	—	Chute (Not Spared)
23	600K87510	Actuator (part of Sensor Flag Kit)
24	604K16630	Feedout Sensor (Tray 3/4) (part of Sensor Kit)
25	—	Interlock Switch
26	059K18901	Roll Assy TA (Takeaway Roll Assembly)
27	—	Bearing (P/O PL 15.10 Item 26)
28	—	Gear (P/O PL 15.10 Item 26)
29	—	Takeaway Roll (P/O PL 15.10 Item 26)
30	—	Wire Harness (Not Spared)

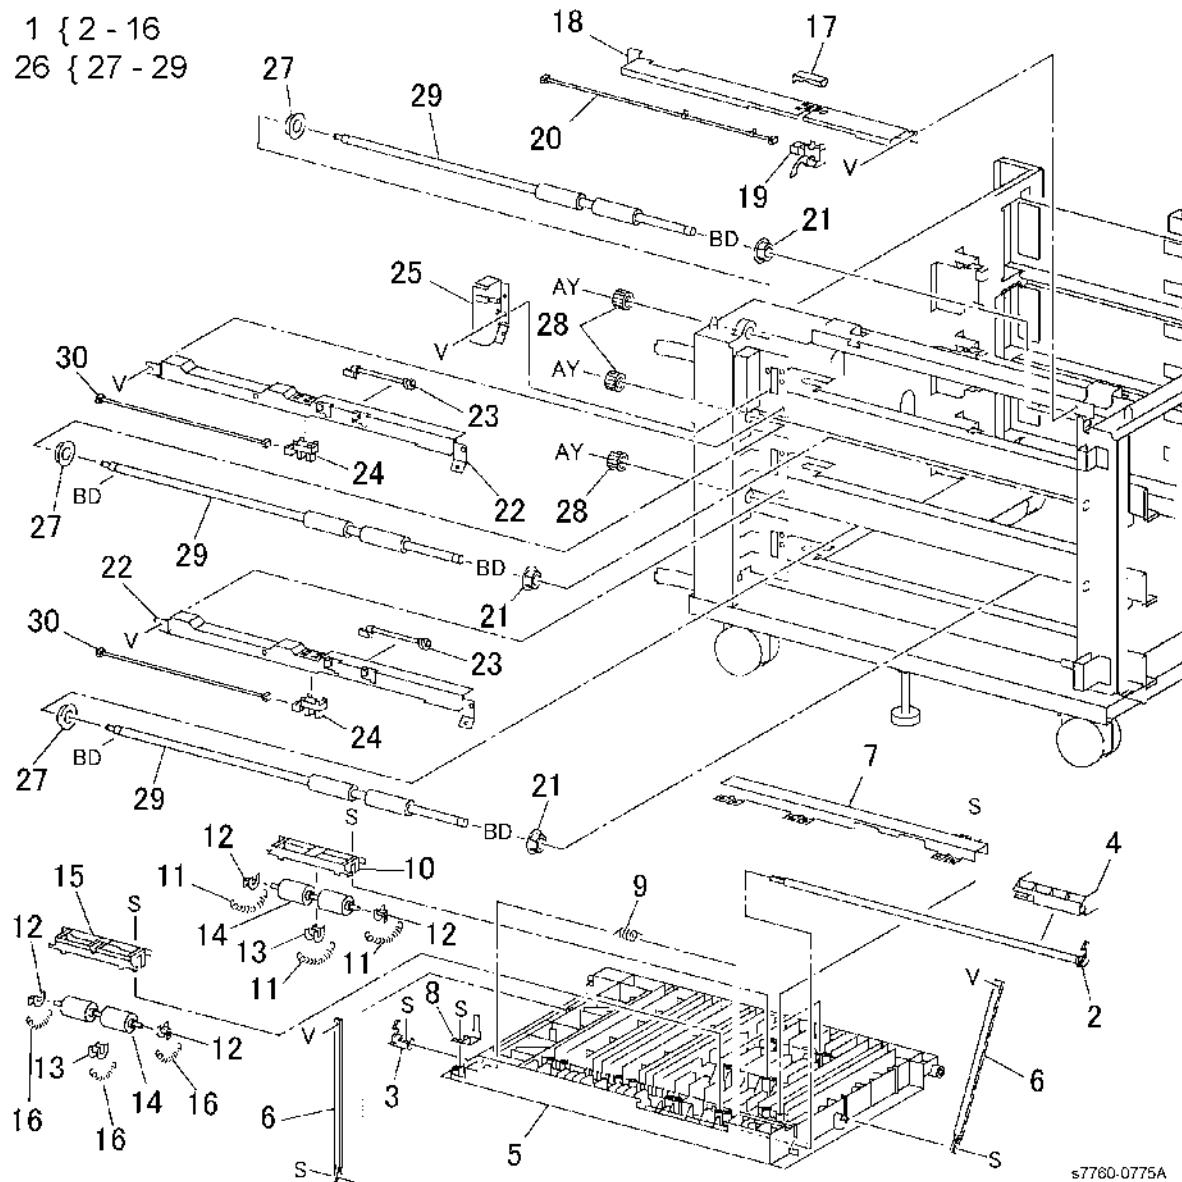

PL 15.11 Covers


Item	Part	Description
1	802E23952	Front Upper Cover
2	802E23961	Front Lower Cover
3	802E23941	Right Cover
4	802E23931	Left Lower Cover (REP 14.12)
5	802K36580	Rear Cover

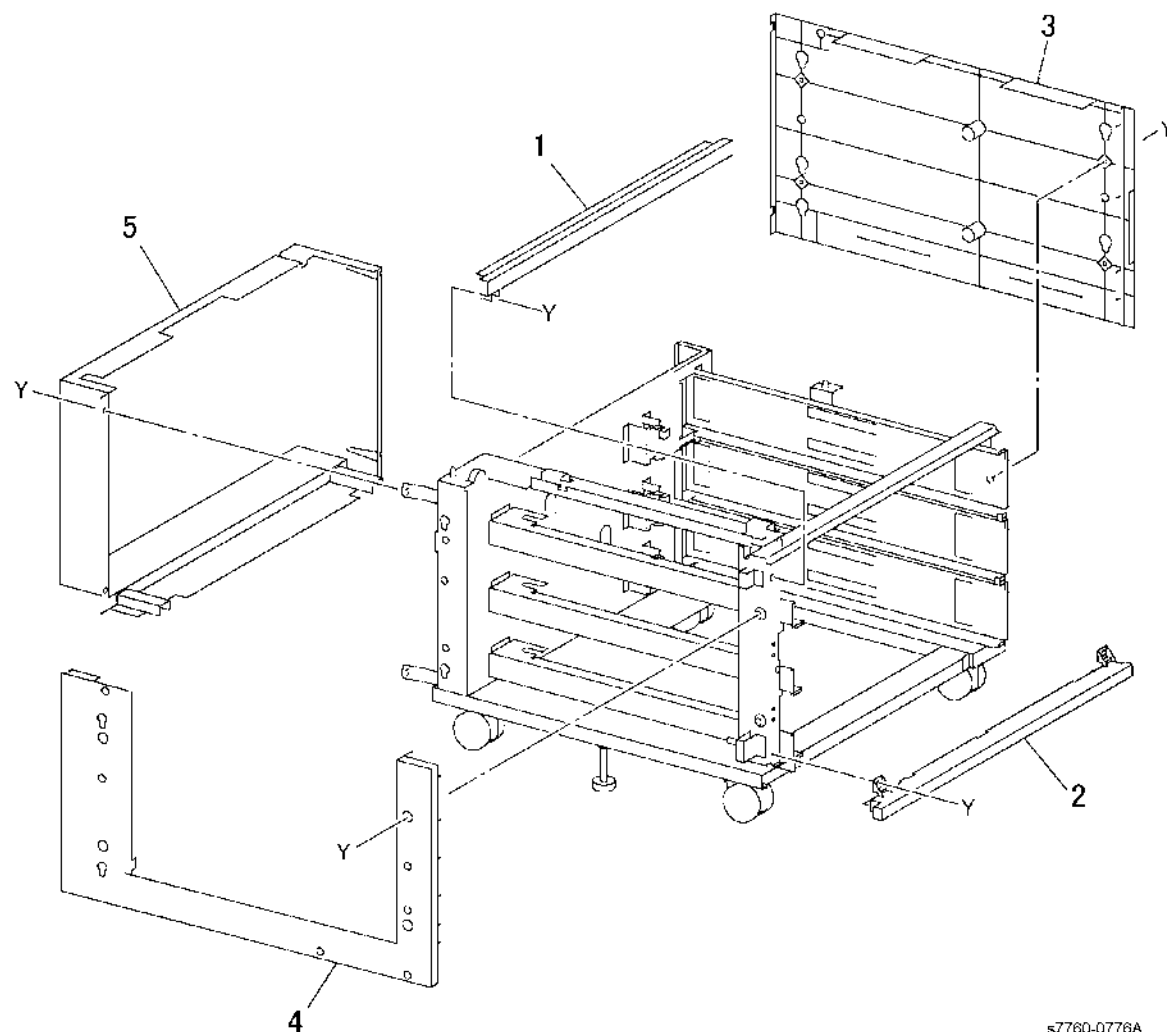

s7760-0776A

PL 16.1 Tray 2/3/4/5 Assembly


Item	Part	Description
1	—	Label (Not Spared) (Tray 3)
2	050K56361	Tray 2/3/4/5 (Universal Tray Assembly) (REP 7.9)
3	—	Stop (Tray 3)
4	—	Spacer (Tray 3)
5	—	Stop (Not Spared) (Tray 4)
6	—	Stop (Not Spared) (Tray 5)
7	050K43131	Tray Assy-LH (Tray 4 Assembly) (REP 7.6)
8	050K43121	Tary Assy-RH (Tray 5 Assembly) (REP 7.7)
9	—	Tray 3 Paper Size Sensor
10	110K10881	Switch Assy-P.S. (Tray 4/5 Paper Size Sensor)
11	—	Roll
12	—	Shaft (Not Spared)
13	—	Bracket (Not Spared)
14	—	Roll (Not Spared)
15	—	Shaft (Not Spared)
16	—	Max Label (Not Spared)
17	—	Label (Tray 4)
18	—	Label (Tray 5)
19	—	Label (Not Spared)
20	—	Instruction Label (Not Spared)

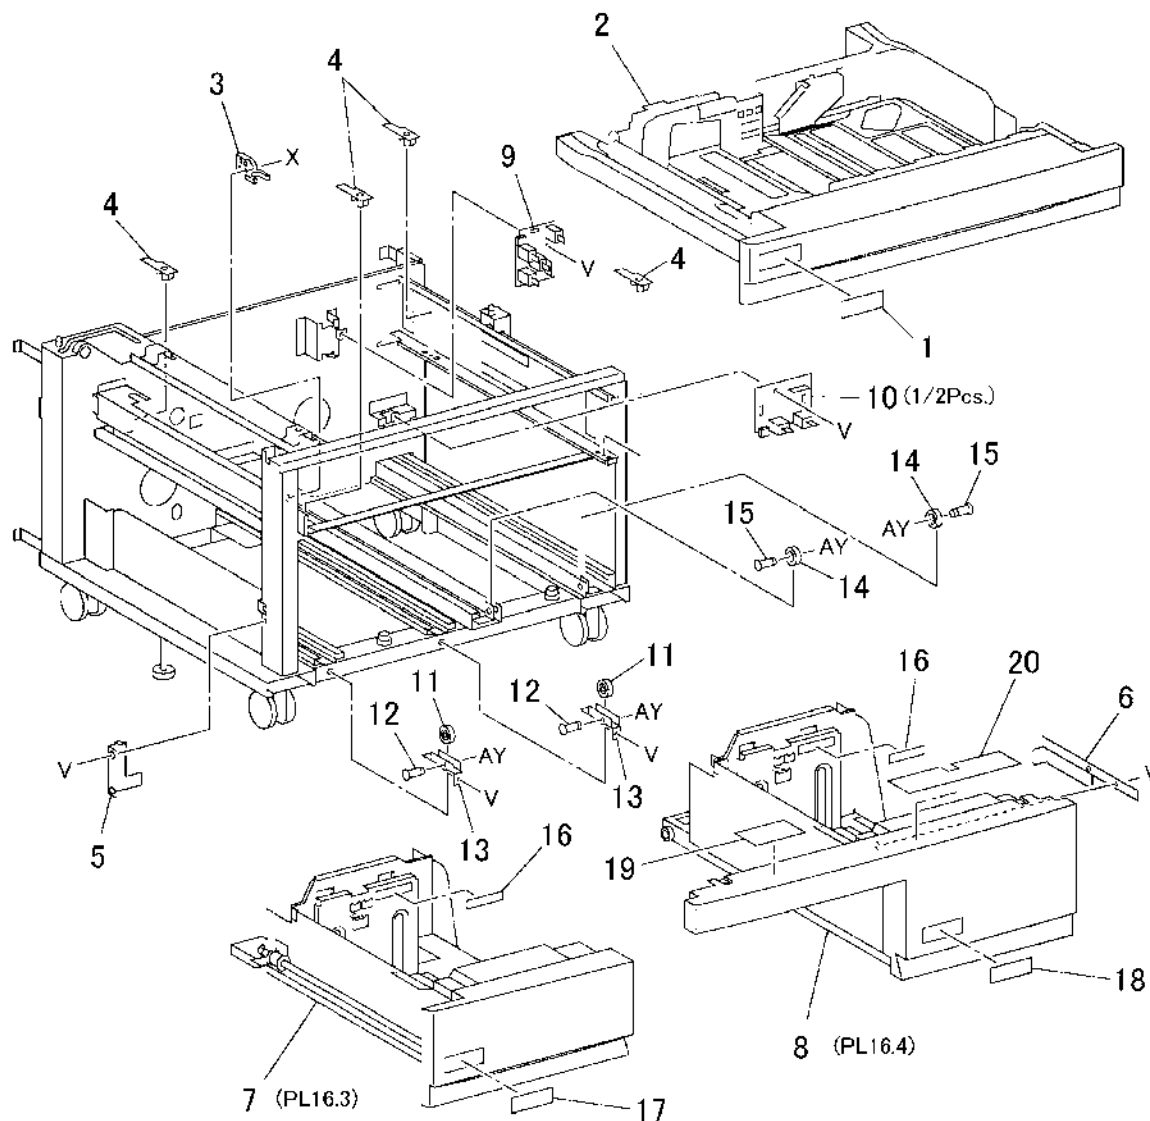

s7760-0777A

PL 16.3 Tray 4


Item	Part	Description
1	802E23992	Tray 4 Cover
2	—	Pulley (P/O PL 16.1 Item 7)
3	—	Lift Shaft (P/O PL 16.1 Item 7)
4	—	Bearing (P/O PL 16.1 Item 7)
5	—	Pulley
6	—	Pulley (P/O PL 16.1 Item 7)
7	—	Cable Guide (P/O PL 16.1 Item 7)
8	—	Pulley Cable (P/O PL 16.1 Item 7)
9	—	Cable Guide (P/O PL 16.1 Item 7)
10	—	Bottom Plate (P/O PL 16.1 Item 7)
11	—	Pad (P/O PL 16.1 Item 7)
12	—	Side Guide (P/O PL 16.1 Item 7)
13	—	Knob (P/O PL 16.1 Item 7)
14	—	Knob (P/O PL 16.1 Item 7)
15	—	Spring
16	—	Frame (P/O PL 16.1 Item 7)
17	—	Bracket (P/O PL 16.1 Item 7)
18	—	Spacer (P/O PL 16.1 Item 7)
19	—	Spacer (P/O PL 16.1 Item 7)
20	—	Bracket (P/O PL 16.1 Item 7)
21	—	Brake (P/O PL 16.1 Item 7)
22	—	Latch (P/O PL 16.1 Item 7)
23	—	Actuator (P/O PL 16.1 Item 7)

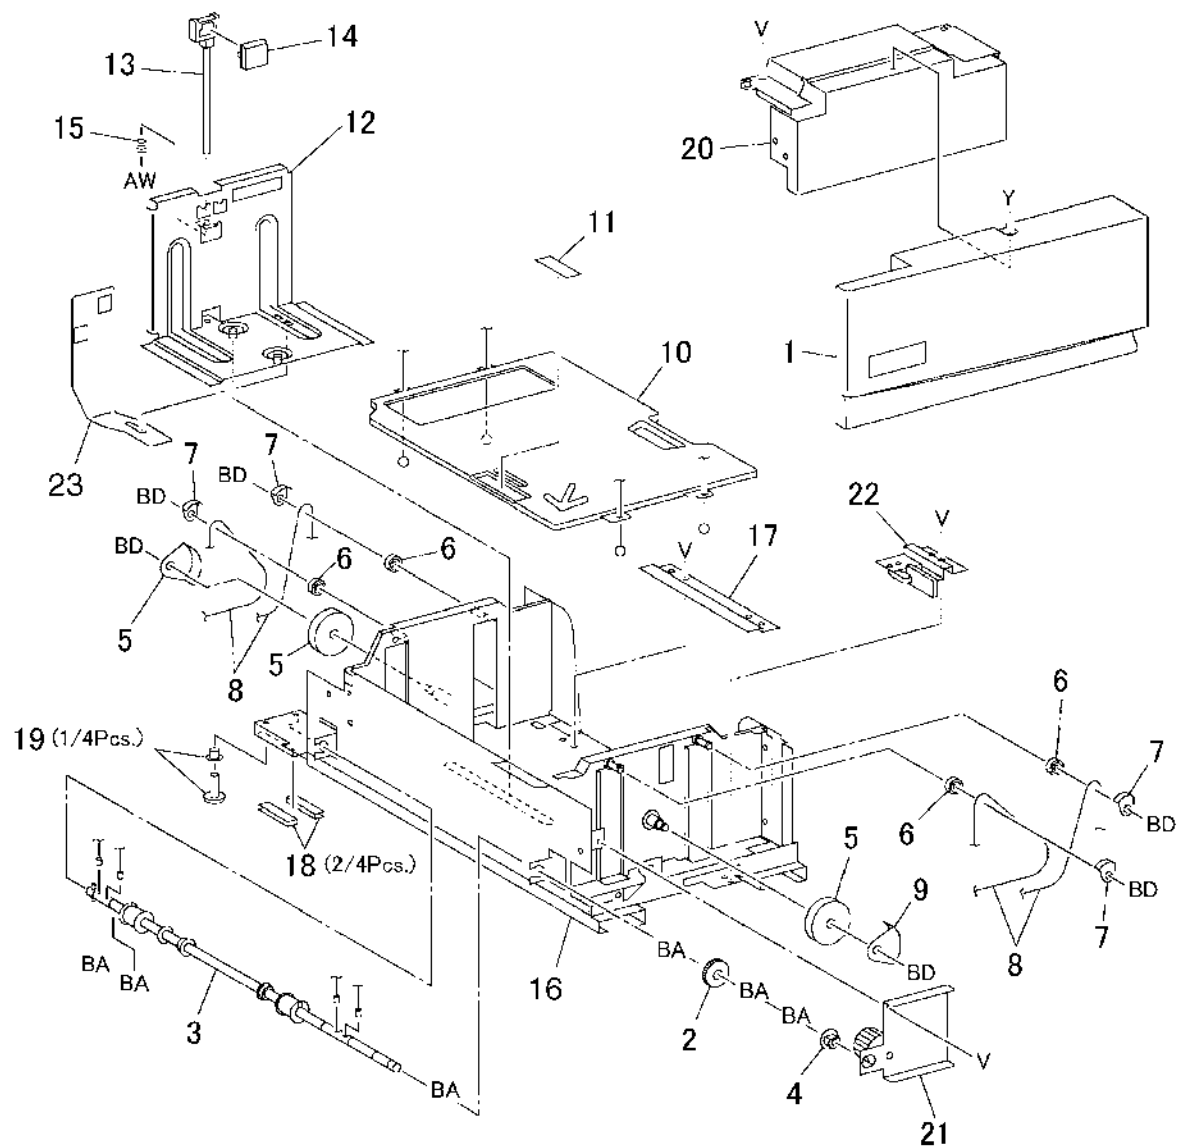

s7760-0778A

PL 16.4 Tray 5

Item	Part	Description
1	802E23982	Tray 5 Cover
2	—	Tray Front Frame (P/O PL 16.1 Item 8)
3	—	Lift Shaft (P/O PL 16.1 Item 8)
4	—	Lift Gear (P/O PL 16.1 Item 8)
5	—	Bearing (P/O PL 16.1 Item 8)
6	—	Brake (P/O PL 16.1 Item 8)
7	—	Pulley (P/O PL 16.1 Item 8)
8	—	Cable Guide (P/O PL 16.1 Item 8)
9	—	Tray Cable
10	—	Bottom Plate (P/O PL 16.1 Item 8)
11	—	Pad (P/O PL 16.1 Item 8)
12	—	Side Guide (P/O PL 16.1 Item 8)
13	—	Knob (P/O PL 16.1 Item 8)
14	—	Knob (P/O PL 16.1 Item 8)
15	—	Spring
16	—	Tray Frame (P/O PL 16.1 Item 8)
17	—	Bracket (P/O PL 16.1 Item 8)
18	—	Latch (P/O PL 16.1 Item 8)
19	—	Actuator (P/O PL 16.1 Item 8)
20	—	Shaft (P/O PL 16.1 Item 8)
21	—	Roll

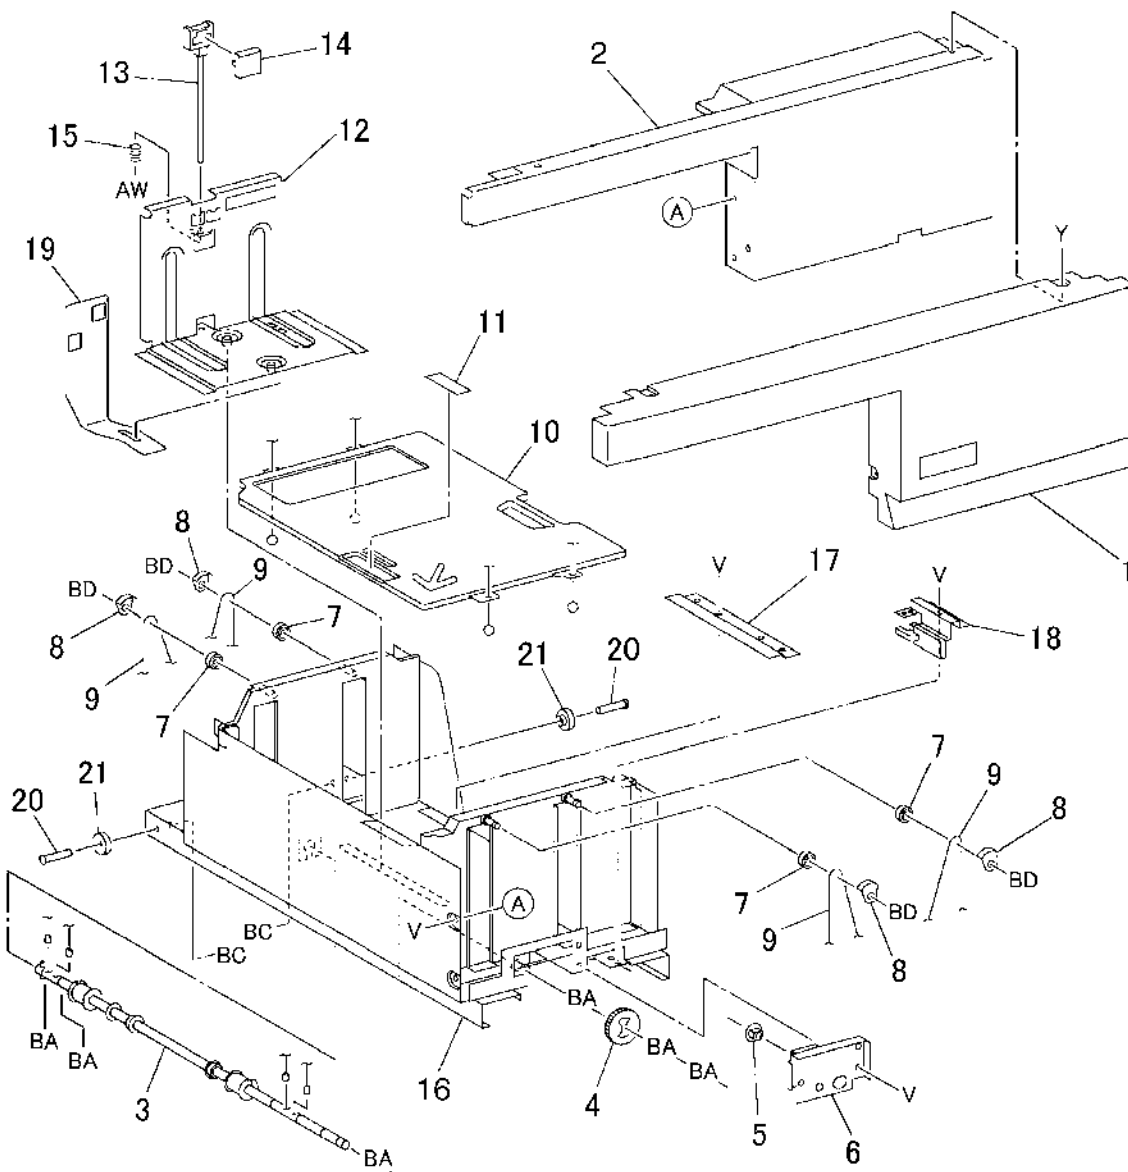


s7760-0779A

PL 16.5 Tray 3/4/5 Paper Feeder: 1 of 2

Item	Part	Description
1	—	Spacer (Not Spared)
2	—	Guide (Not Spared)
3	—	Stop (Not Spared)
4	059K21792	Tray 5 Transport Assembly
5	—	Upper Chute (P/O PL 16.5 Item 4)
6	—	Takeaway Roll (P/O PL 16.5 Item 4)
7	—	Bearing (P/O PL 16.5 Item 4)
8	—	Cover (P/O PL 16.5 Item 4)
9	—	Pinch Roll (P/O PL 16.5 Item 4)
10	—	Bearing (P/O PL 16.5 Item 4)
11	—	Spring (P/O PL 16.5 Item 4)
12	—	Spacer (P/O PL 16.5 Item 4)
13	—	Spacer (P/O PL 16.5 Item 4)
14	—	Lower Chute (P/O PL 16.5 Item 4)
15	—	Bracket (Not Spared)
16	059K18333	Paper Feeder Assy (with 16, 20, 21) (Tray 5 Feeder) (REP 7.12)
17	—	Bracket (Not Spared)
18	—	Bracket (Not Spared)
19	130E87400	Tray 5 Feedout Sensor
20	054E18542	Chute to Upper (Upper Chute)
21	054E18532	Chute to Lower (Lower Chute)
22	—	Bracket (Not Spared)

4 { 5 - 14

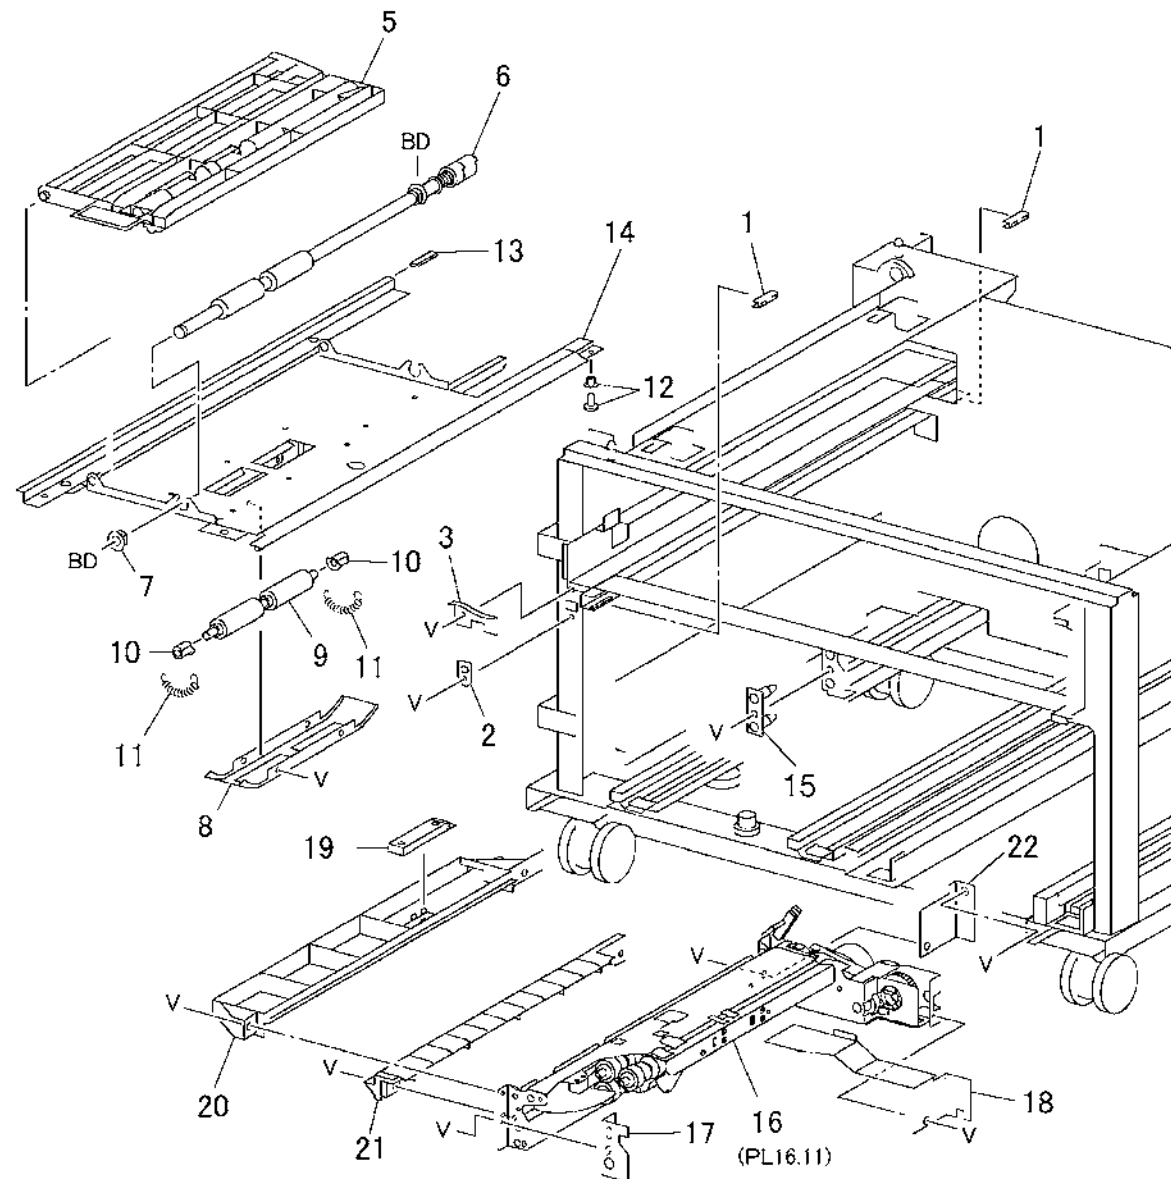


s7760-0780A

PL 16.6 Tray 3/4/5 Paper Feeder: 2 of 2

Item	Part	Description
1	—	Takeaway Roll
2	—	Bearing (Not Spared)
3	—	Chute (Not Spared)
4	—	Cover (Not Spared)
5	604K16630	Takeaway Sensor (Sensor Kit)
6	—	Wire Harness
7	059K15577	Tray 3/4 Feeder (REP 7.10, REP 7.11)
8	054K18271	Chute Assembly-FO TM
9	—	Actuator (P/O PL 16.6 Item 8)
10	604K16630	Tray 3/4 Feedout Sensor (Sensor Kit)
11	—	Wire Harness (P/O PL 16.6 Item 8)
12	—	Chute (P/O PL 16.6 Item 8)
13	054E18521	Lower Chute
14	—	Bracket (Not Spared)


8 { 9 - 12

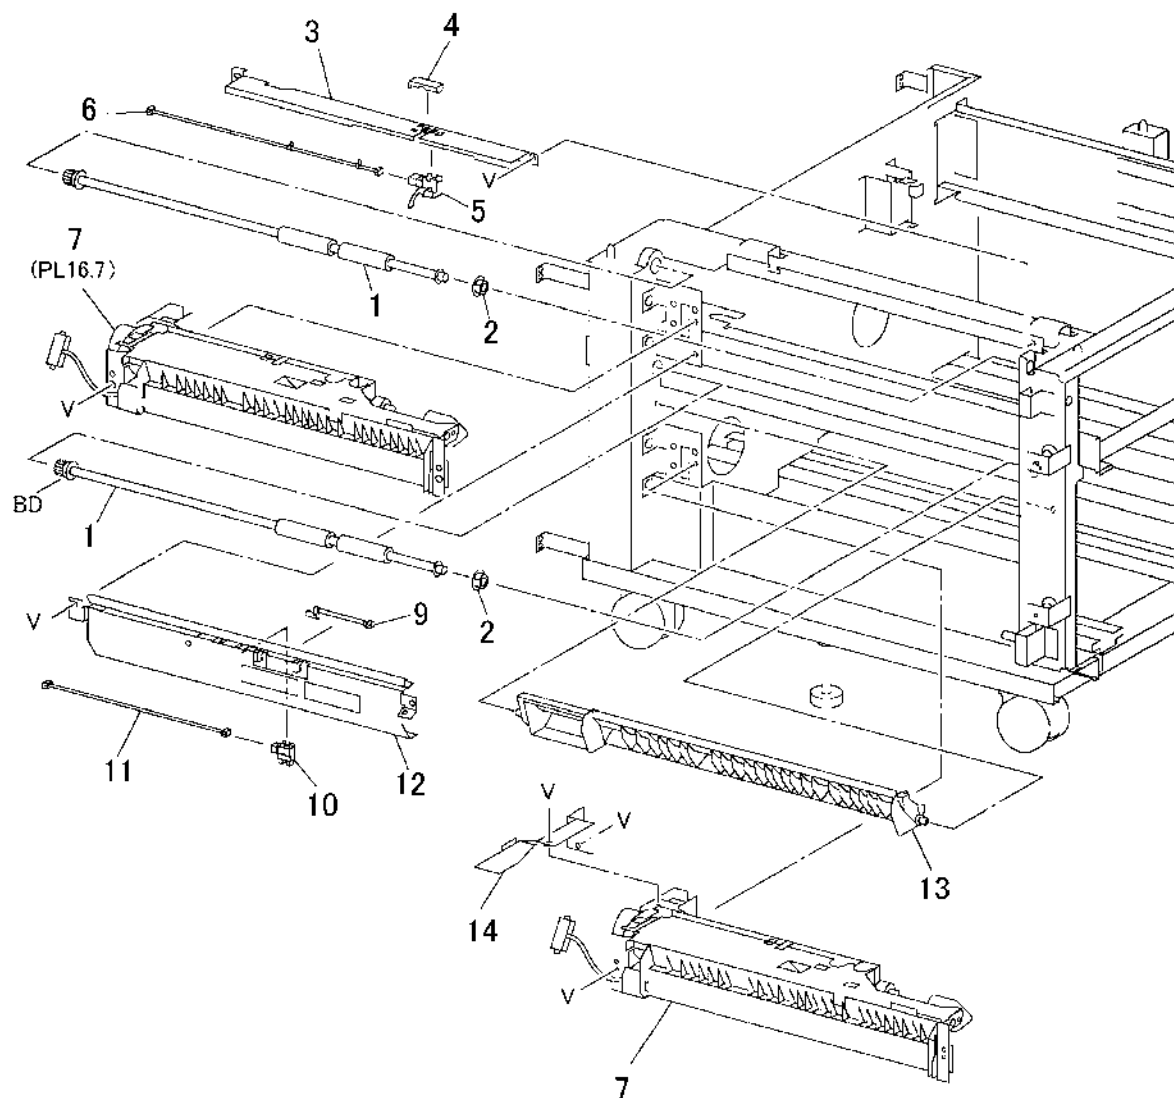

s7760-0781A

PL 16.13 Left Cover Assembly (Left Hand Door C)


Item	Part	Description
1	802K65601	Cover Assy-LH_TTM (Left Cover Assembly) (REP 14.11)
2	—	Shaft
3	—	Hook
4	—	Handle
5	—	Left Cover (Left Hand Door C) (P/O PL 16.13 Item 1)
6	—	Support (P/O PL 16.13 Item 1)
7	—	Cover (P/O PL 16.13 Item 1)
8	—	Actuator (P/O PL 16.13 Item 1)
9	—	Spring (P/O PL 16.13 Item 1)
10	—	Bearing (P/O PL 16.13 Item 1)
11	—	Bearing (P/O PL 16.13 Item 1)
12	—	Pinch Roll (P/O PL 16.13 Item 1)
13	—	Spring
14	—	Bracket (P/O PL 16.13 Item 1)
15	—	Spring
16	—	Bracket (P/O PL 16.13 Item 1)
17	—	Interlock Switch
18	—	Bracket (Not Spared)

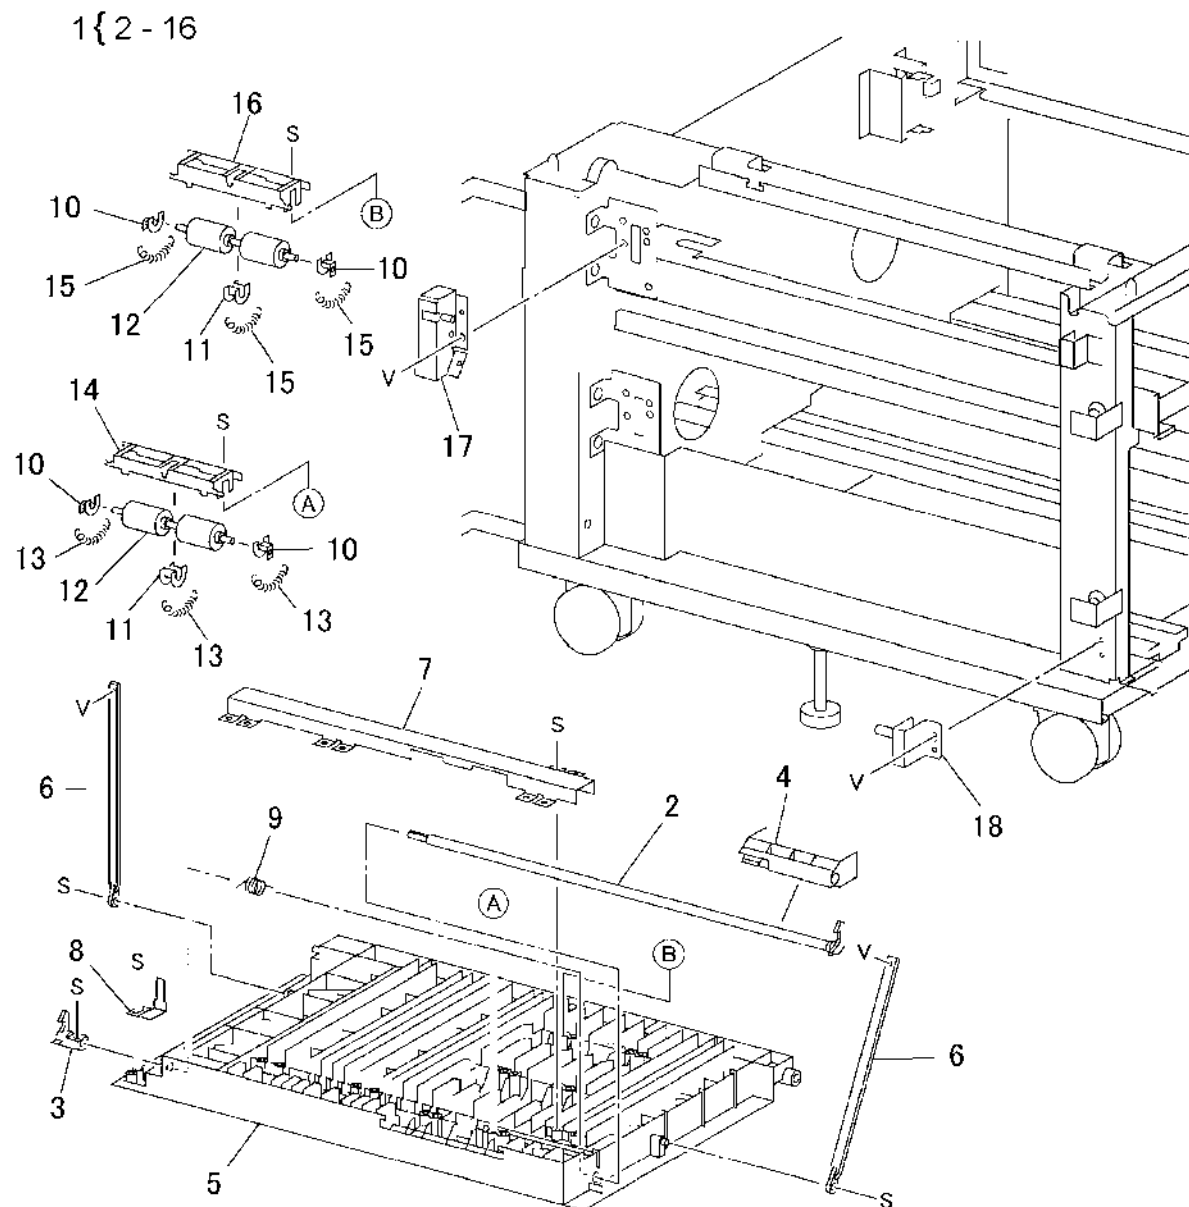

s7760-0784A

PL 16.14 Tray 4/5 Lift Gear Assembly


Item	Part	Description
1	—	Transport Guide (Not Spared)
2	015K49461	Bracket Assy-Gear, LH (Gear Assembly) (Tray 4)
3	015K49451	Bracket Assy-Gear, RH (Gear Assembly) (Tray 5)
4	—	Lift Gear
5	—	Coupling
6	—	Bearing (Not Spared)

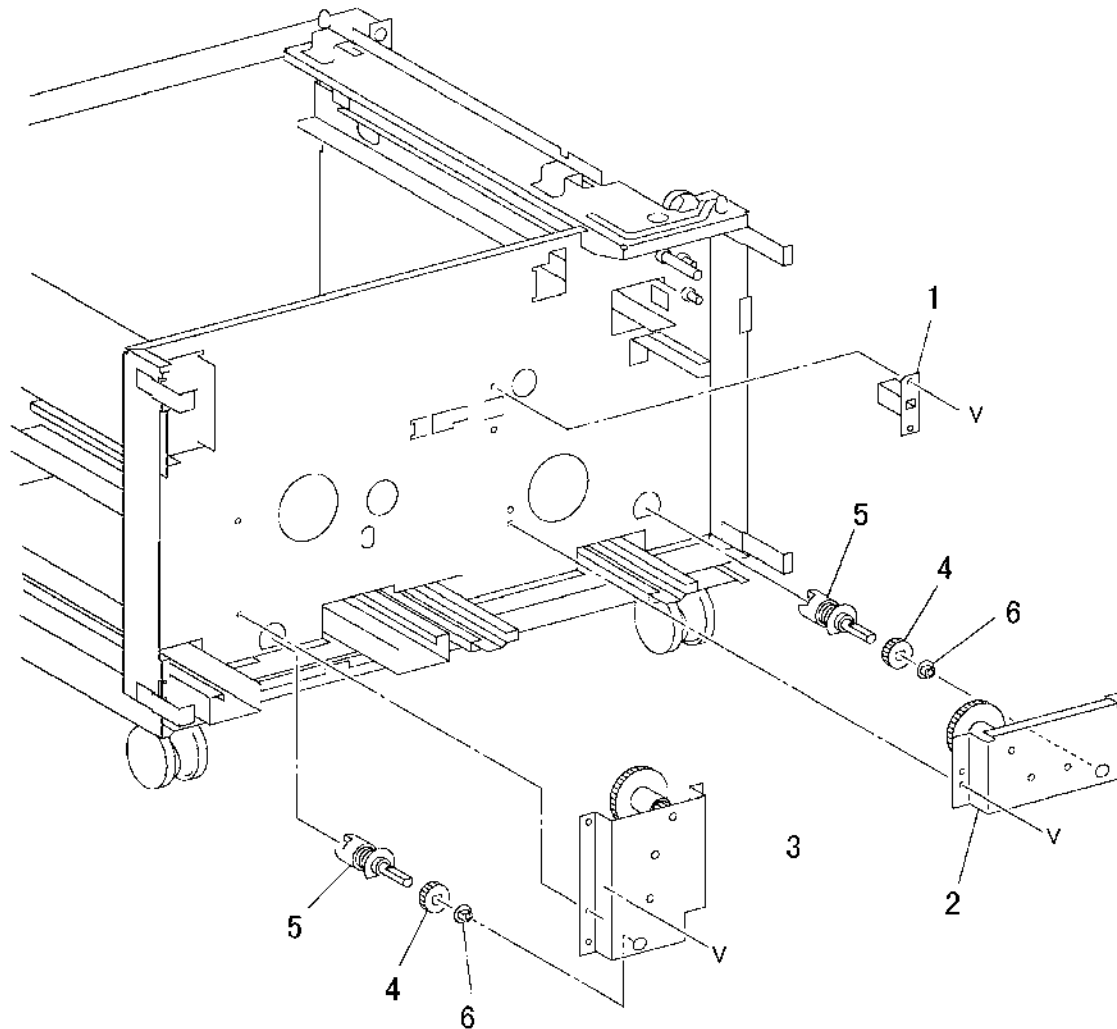

s7760-0785A

PL 16.15 Electrical Components and Casters


Item	Part	Description
1	—	Gear (23/46T)
2	—	Gear (46T)
3	—	Gear (33T)
4	127K31841	Motor Assy Trans (Takeaway Motor 2)
5	—	Takeaway Motor 1
6	—	Left Coupling (Not Spared)
7	—	Right Coupling (Not Spared)
8	—	Foot (Not Spared)
9	—	Caster
10	—	Caster
11	—	Bracket (Not Spared)
12	960K01752	Tray Module PWB

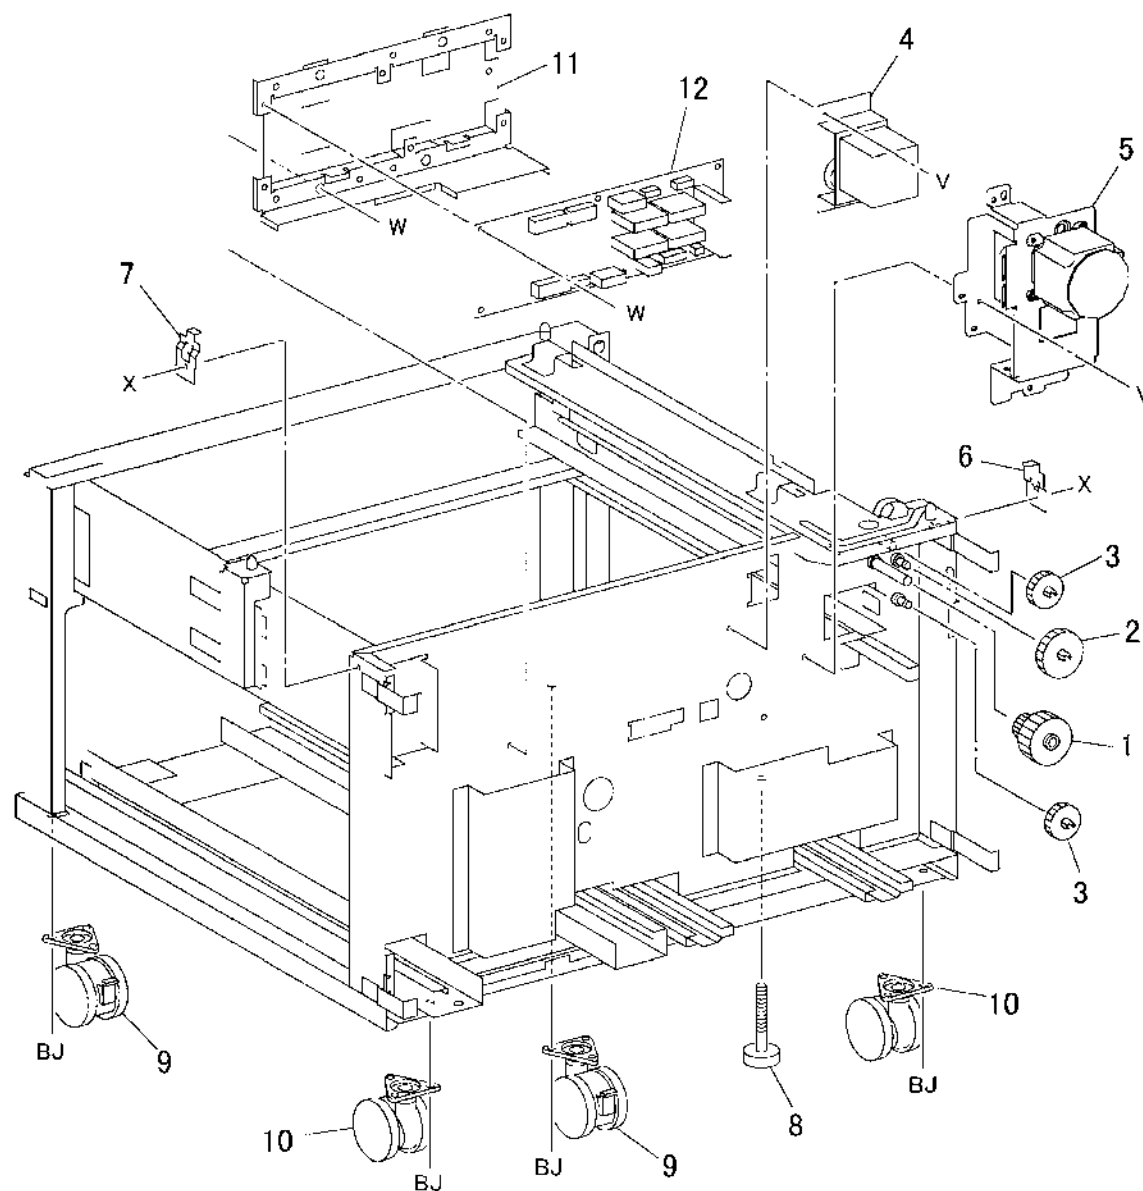

s7760-0788A

PL 16.16 Covers


Item	Part	Description
1	802E23941	Right Cover
2	802E23952	Front Upper Cover
3	802E23961	Front Lower Cover
4	802K50492	Rear Cover (REP 14.9)
5	802E23931	Left Lower Cover (Left Hand Door C) (REP 14.12)

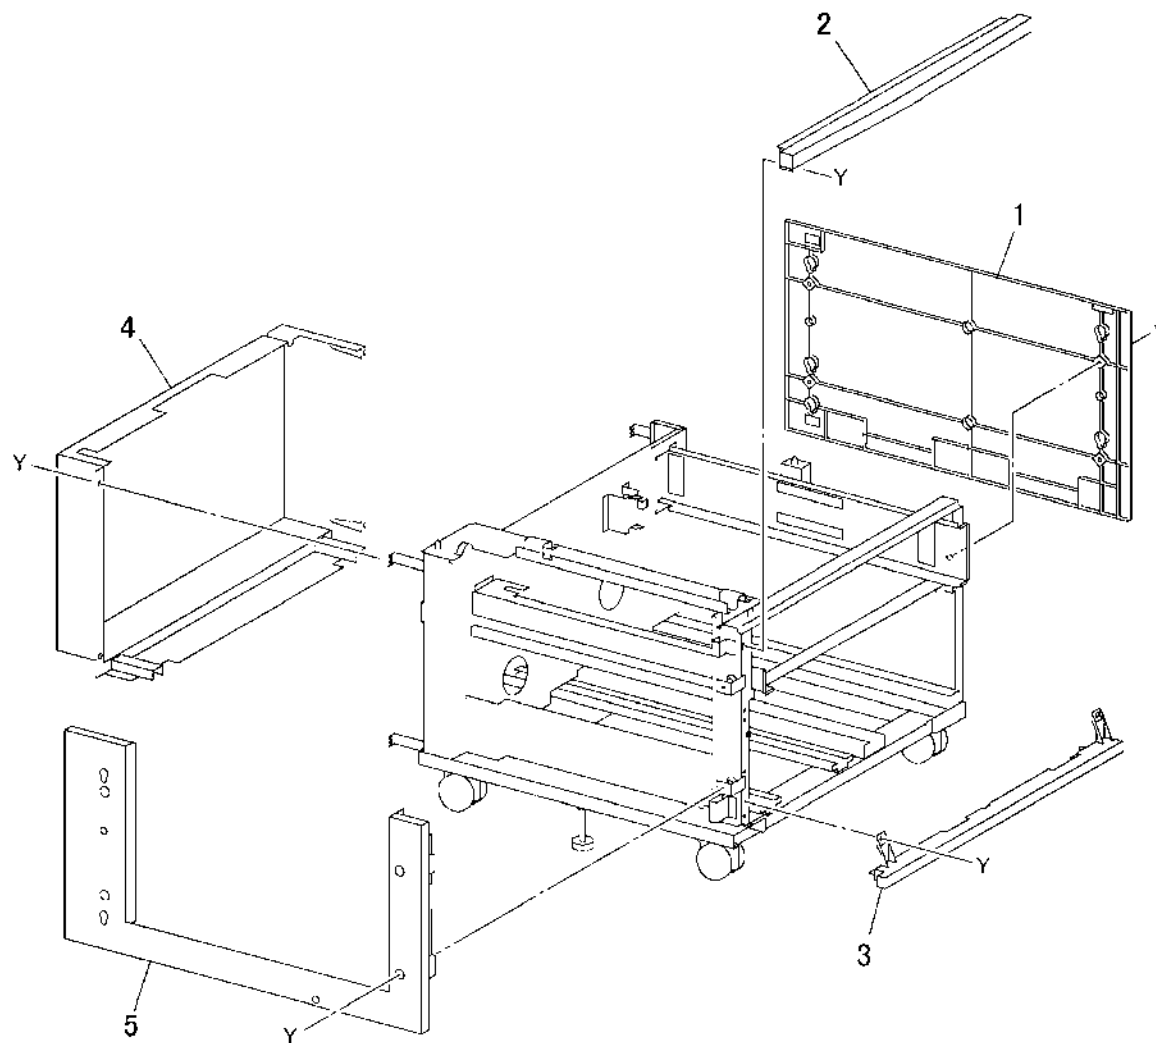

s7760-0787A

PL 21.1 A/P Finisher


Item	Part	Description
1	—	A/P Finisher (Not Spared) (REP 12.50, ADJ 12.2)
2	059K37916	H-Transport Assembly (PL 21.24) (REP 12.51)
3	—	Booklet Maker (PL 21.15) (REP 12.55)
4	—	Booklet Tray (PL 21.23)

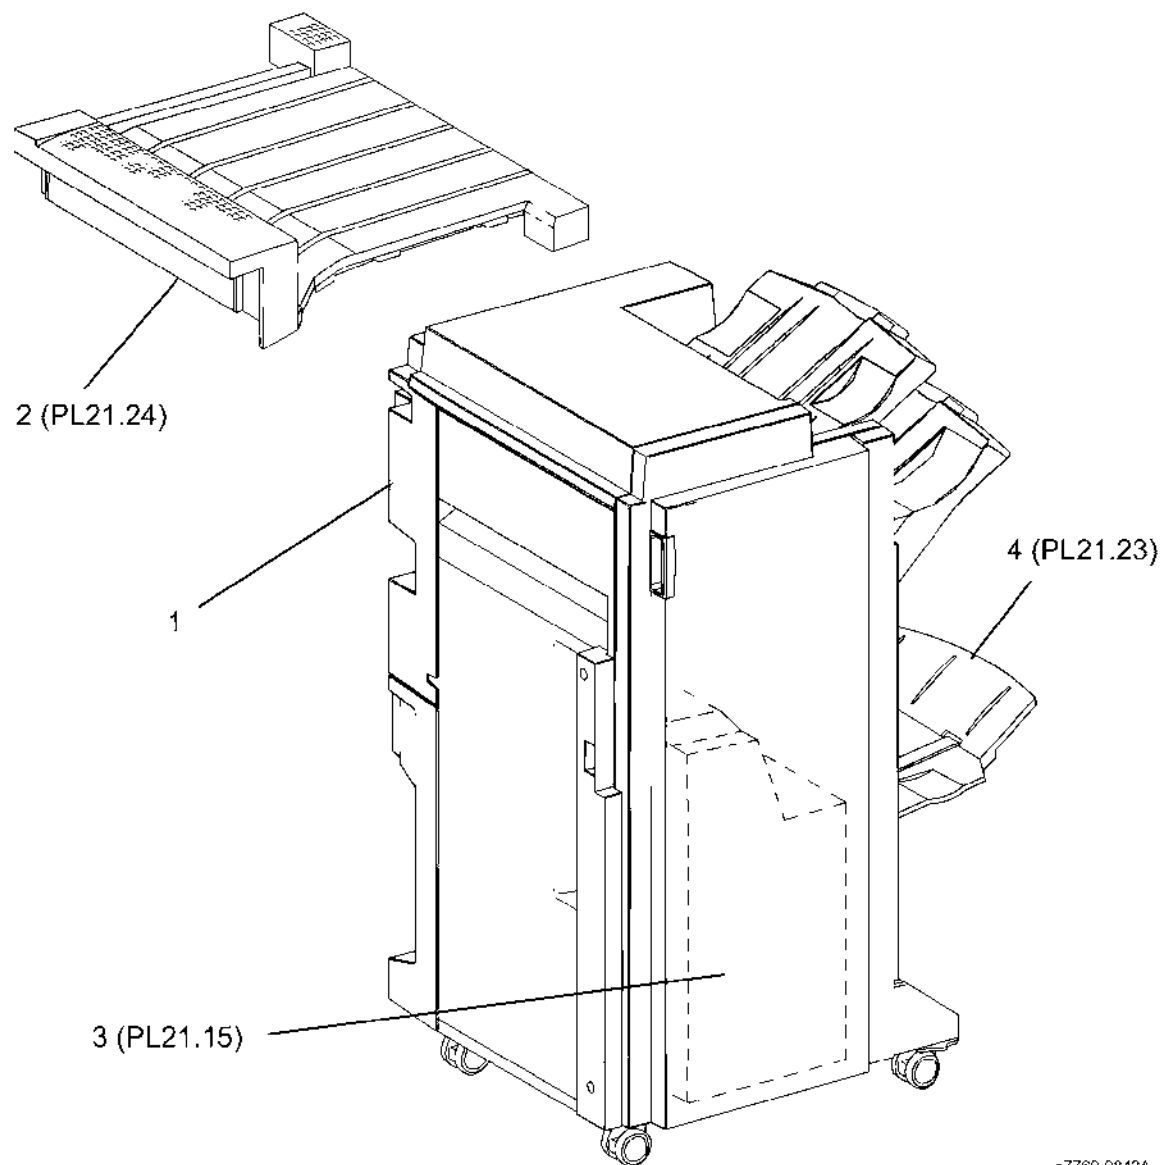

s7760-0843A

PL 21.2 Finisher Cover: 1 of 2


Item	Part	Description
1	—	Top Cover (Not Spared) (REP 12.43)
2	—	Tray Spring Guide (Not Spared) (REP 12.47)
3	—	Top Tray (Not Spared) (REP 12.45)
4	—	Eject Cover (Not Spared) (REP 12.46)
5	—	Stacker Tray (Not Spared) (REP 12.58)
6	—	Bottom Cover (Not Spared)
7	017E98040	Caster
8	017E97230	Caster
9	—	Rear Lower Cover (Not Spared) (REP 12.42)
10	—	H-Transport Connector Cover (Not Spared)
11	—	Rear Upper Cover (Not Spared) (REP 12.41)
12	—	Nut M12X1.25 (Not Spared)

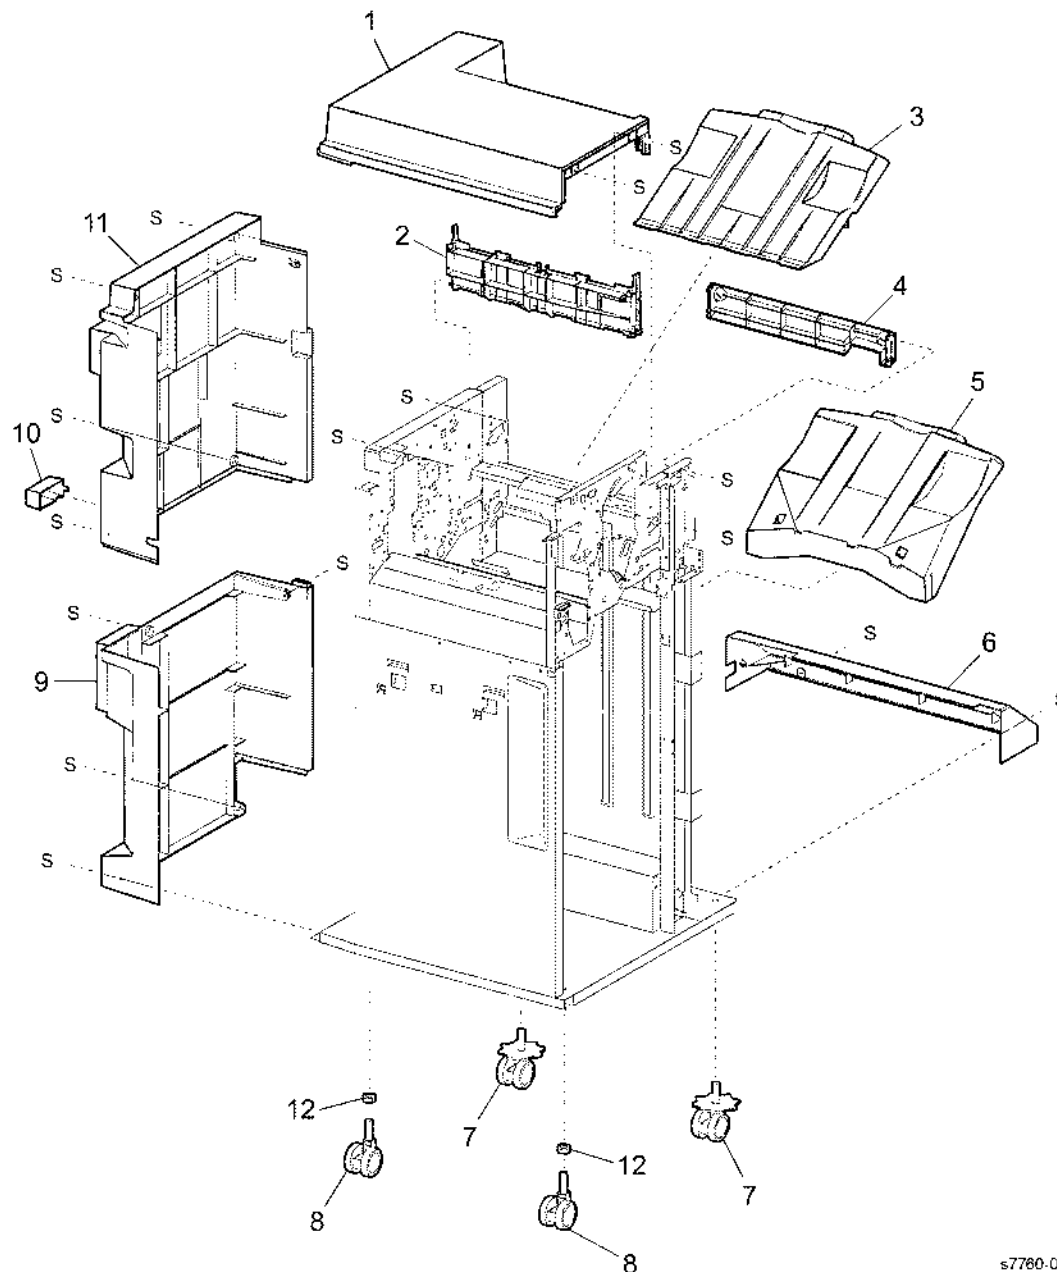

s7760-0788A

PL 21.3 Finisher Cover: 2 of 2


Item	Part	Description
1	—	Front Top Cover (Not Spared) (REP 12.44)
2	110E97990	Front Door Interlock Switch
3	—	Front Door (P/O PL 21.3 Item 11)
4	—	Hinge Bracket (P/O PL 21.3 Item 11)
5	—	Front Right Cover (P/O PL 21.3 Item 11)
6	—	Docking Plate (Not Spared)
7	—	Spring (Not Spared)
8	802E73871	Front Left Cover
9	—	Left Top Cover (Not Spared) (REP 12.49)
10	015K67230	IOT Docking Plate
11	802K67130	Front Door Assembly (REP 12.40)
12	—	Interlock Cover (Not Spared)

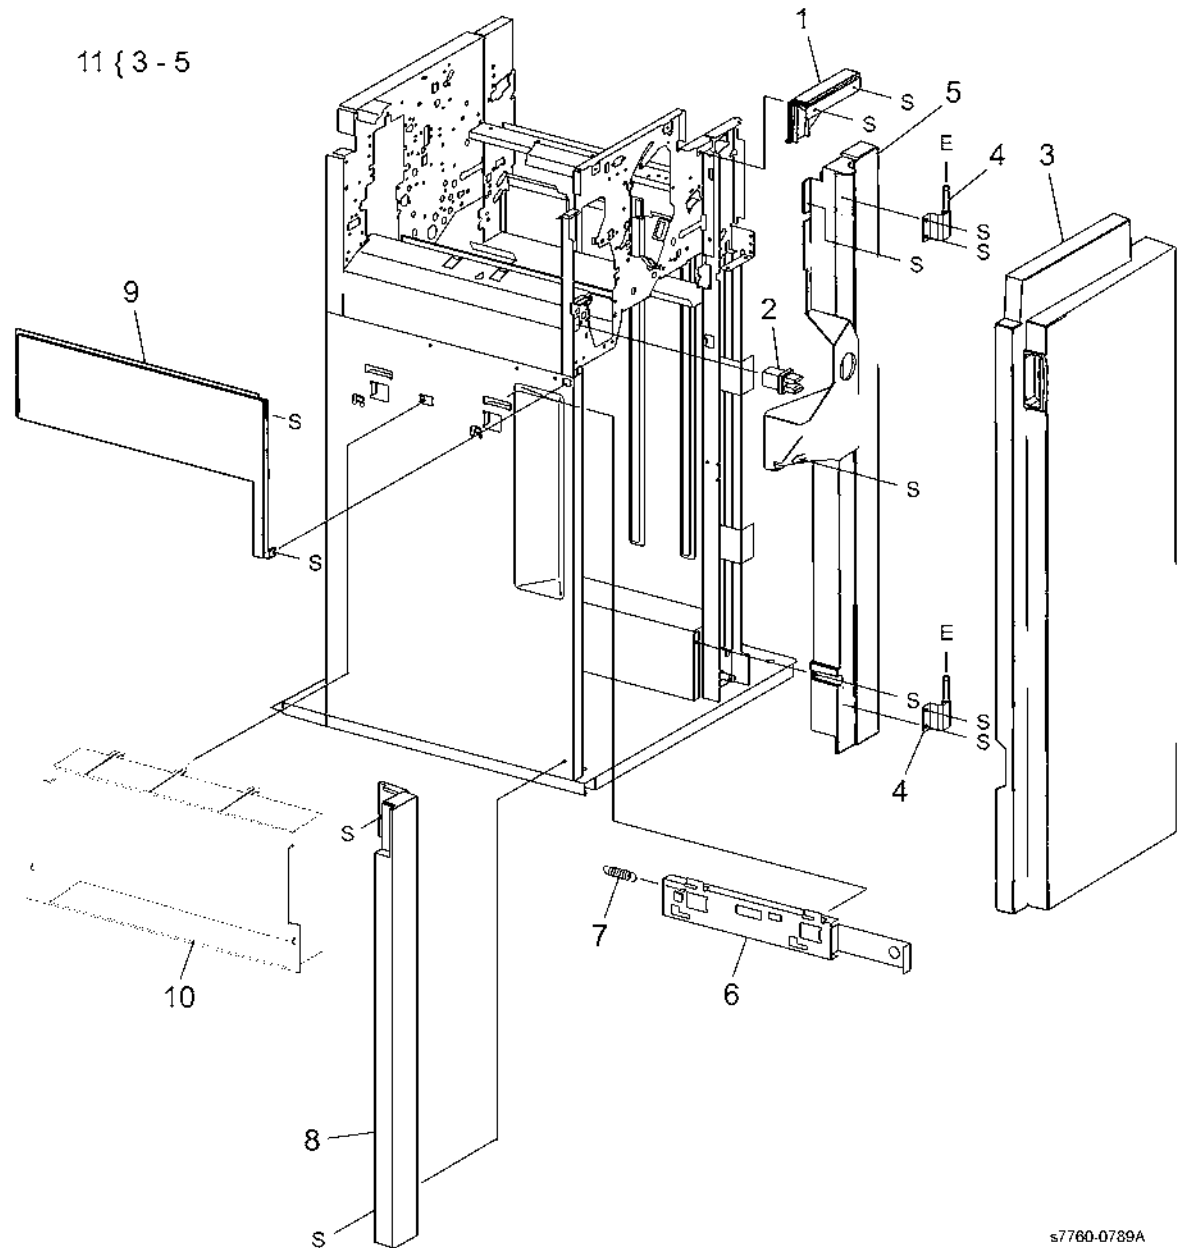

s7760-0789A

PL 21.4 Finisher Stack


Item	Part	Description
1	—	Stacker Tray Bracket (Not Spared)
2	041K94720	Left Carriage Assembly
3	—	Stacker Drive Belt (P/O PL 21.4 Item 2) (REP 12.60)
4	—	Left Carriage Bracket (P/O PL 21.4 Item 2)
5	—	Belt Clamp (P/O PL 21.4 Item 2)
6	809E56850	Spring
7	013E27150	Carriage Bearing
8	041K94730	Right Carriage Assembly
9	023E21520	Stacker Drive Belt (P/O PL 21.4 Item 8) (REP 12.60)
10	019E58660	Belt Clamp (P/O PL 21.4 Item 8)
11	—	Right Carriage Bracket (P/O PL 21.4 Item 8)
12	—	Stacker Sensor Actuator (P/O PL 21.4 Item 8)
13	802K67140	Stack Height Sensor (Front, Rear)
14	—	Elevator Drive Shaft (Not Spared)
15	413W77559	Bearing
16	020E37720	Pulley (18T)
17	130K88770	Stacker Encoder Sensor, Stacker No Paper Sensor (No Paper), Upper Limit Sensor (Limit)
18	020E37710	Clutch Pulley
19	807E08990	Clutch Gear
20	809E56860	Spring
21	251W31178	Washer
22	—	Sensor Bracket (Not Spared)
23	146E01770	Stacker Encoder
24	015K65900	Elevator Motor Assembly
25	—	Elevator Motor Drive Belt (P/O PL 21.4 Item 24)
26	—	Elevator Motor (P/O PL 21.4 Item 24)
27	110E11990	Down Load Interlock Switch

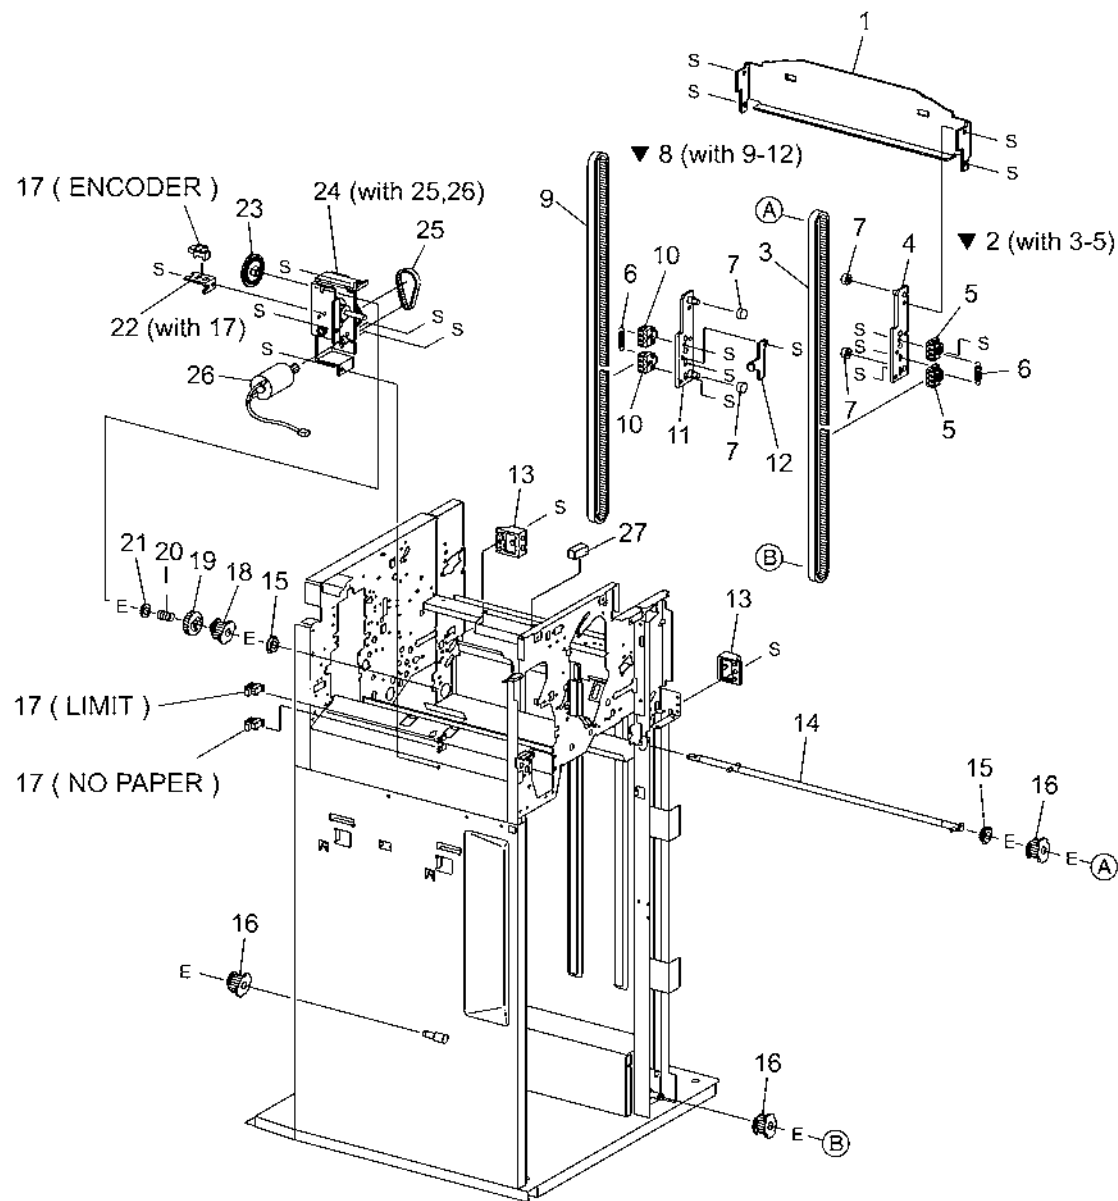

s7760-0790A

PL 21.5 Finisher Punch


Item	Part	Description	
1	—	Puncher Frame Assembly (REP 12.52)	1{ 2 - 8
2	—	Puncher Unit Harness (P/O PL 21.5 Item 9)	6{ 8, 21
3	—	Puncher Motor Cover (P/O PL 21.5 Item 9)	9{ 2, 6 - 16
4	015K65880	Puncher Move Motor	14{ 12, 13, 23
5	—	Frame Assembly Holder (Not Spared)	18{ 17
6	015K65840	Sensor Registration Bracket Assembly	
7	—	Front Punch Cover (Not Spared)	
8	—	Side Registration Sensor 1 (Reg 1) and 2 (Reg 2) (P/O PL 21.5 Item 6)	
9	015K65870	Punch Bracket Assembly	
10	—	Left Punch Cover (Not Spared)	
11	—	Guide Assembly (P/O PL 21.5 Item 9)	
12	—	Punch Motor Assembly (P/O PL 21.5 Item 9)	
13	—	Punch Motor Sensor (P/O PL 21.5 Item 14)	
14	015K65920	Punch Motor Bracket Assembly	
15	—	Front Punch Sensor (Front), Home Punch Sensor (Home), Hole Select Punch Sensor (Hole) (P/O PL 21.5 Item 9)	
16	—	Sensor Bracket (P/O PL 21.5 Item 9)	
17	—	Punch Move Home Sensor (P/O PL 21.5 Item 18)	
18	015K65830	Punch Move Home Sensor Assembly	
19	060E01140	Puncher Waste Bin	
20	130K88770	Puncher Box Set Sensor	
21	—	Sensor Registration Bracket (P/O item 6)	
22	—	Punch Move Home Sensor Bracket (P/O 18)	
23	—	Punch Motor Bracket (P/O PL 21.5 Item 14)	
24	—	Punch Bracket (P/O PL 21.5 Item 9)	

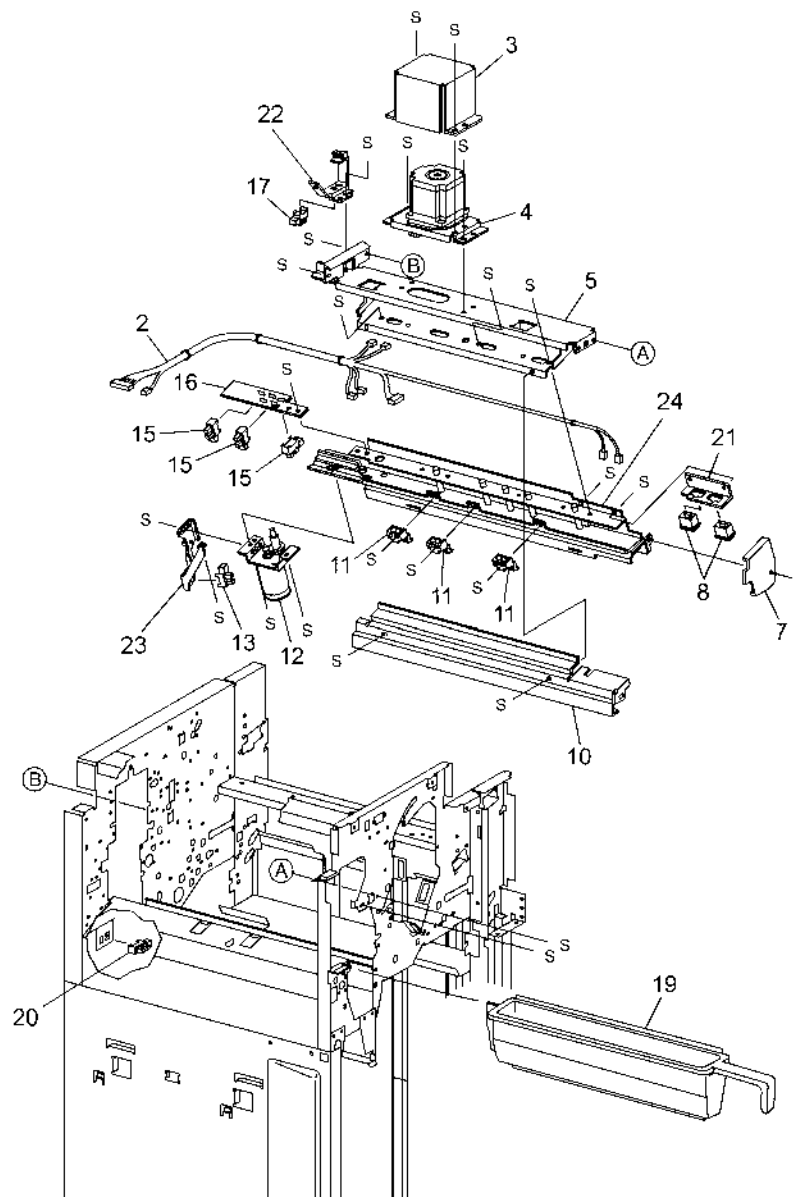

s7760-0791A

PL 21.6 Finisher Stapler


Item	Part	Description
1	—	Staple Cartridge
2	029K92151	Stapler Assembly (REP 12.53)
3	—	Stapler Cover (Not Spared)
4	—	Stapler Holder (Not Spared)
5	130K88770	Stapler Move Position Sensor
6	—	Stapler Harness Guide (Not Spared)
7	—	Staple Harness (Not Spared)
8	—	Upper Stapler Carriage (Not Spared)
9	041K94750	Stapler Move Motor
10	001E66640	Stapler Rail (REP 12.54)
11	—	Stapler Frame (Not Spared)

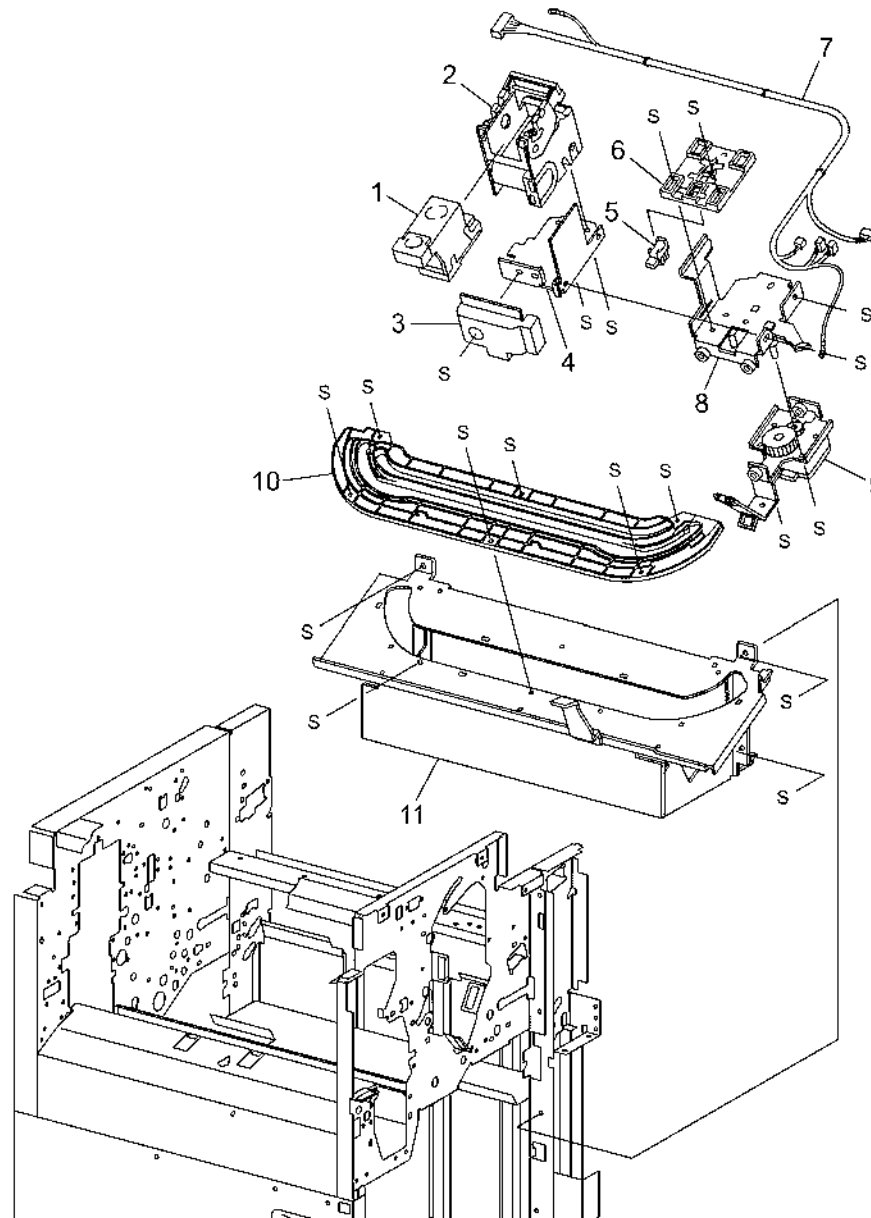

s7760-0792A

PL 21.7 Finisher Eject: 1 of 3


Item	Part	Description
1	—	Eject Chute Assembly (REP 12.67)
2	—	Magnet (Not Spared)
3	121K34620	Sub Paddle Solenoid
4	—	Solenoid Bracket (Not Spared)
5	—	Pinch Spring (Not Spared)
6	—	Cyclone Paddle (P/O PL 21.7 Item 7)
7	006K24160	Eject Pinch Shaft Assembly
8	809E56880	Solenoid Spring
9	006K24090	Paddle Shaft
10	015K65860	Eject Clamp Motor Assembly (with 11-13)
11	—	Eject Clamp Motor (P/O PL 21.7 Item 10)
12	—	Eject Clamp Bracket (P/O PL 21.7 Item 10)
13	130K88780	Eject Clamp Home Sensor
14	011K97710	Eject Cam Follower
15	413W77559	Bushing
16	807E04700	Gear (23T)
17	413W11660	Bushing
18	807E04750	Cam Gear (70T)
19	807E08990	Gear (23T)
20	807E04740	Gear (68T/20T)
21	—	Wire Clip (Not Spared)
22	—	Switch Bracket (Not Spared)
23	110E11590	Eject Cover Switch
24	—	Entrance Knob (Not Spared)
25	—	Wire Clamp (Not Spared)
26	—	Wire Clip (Not Spared)

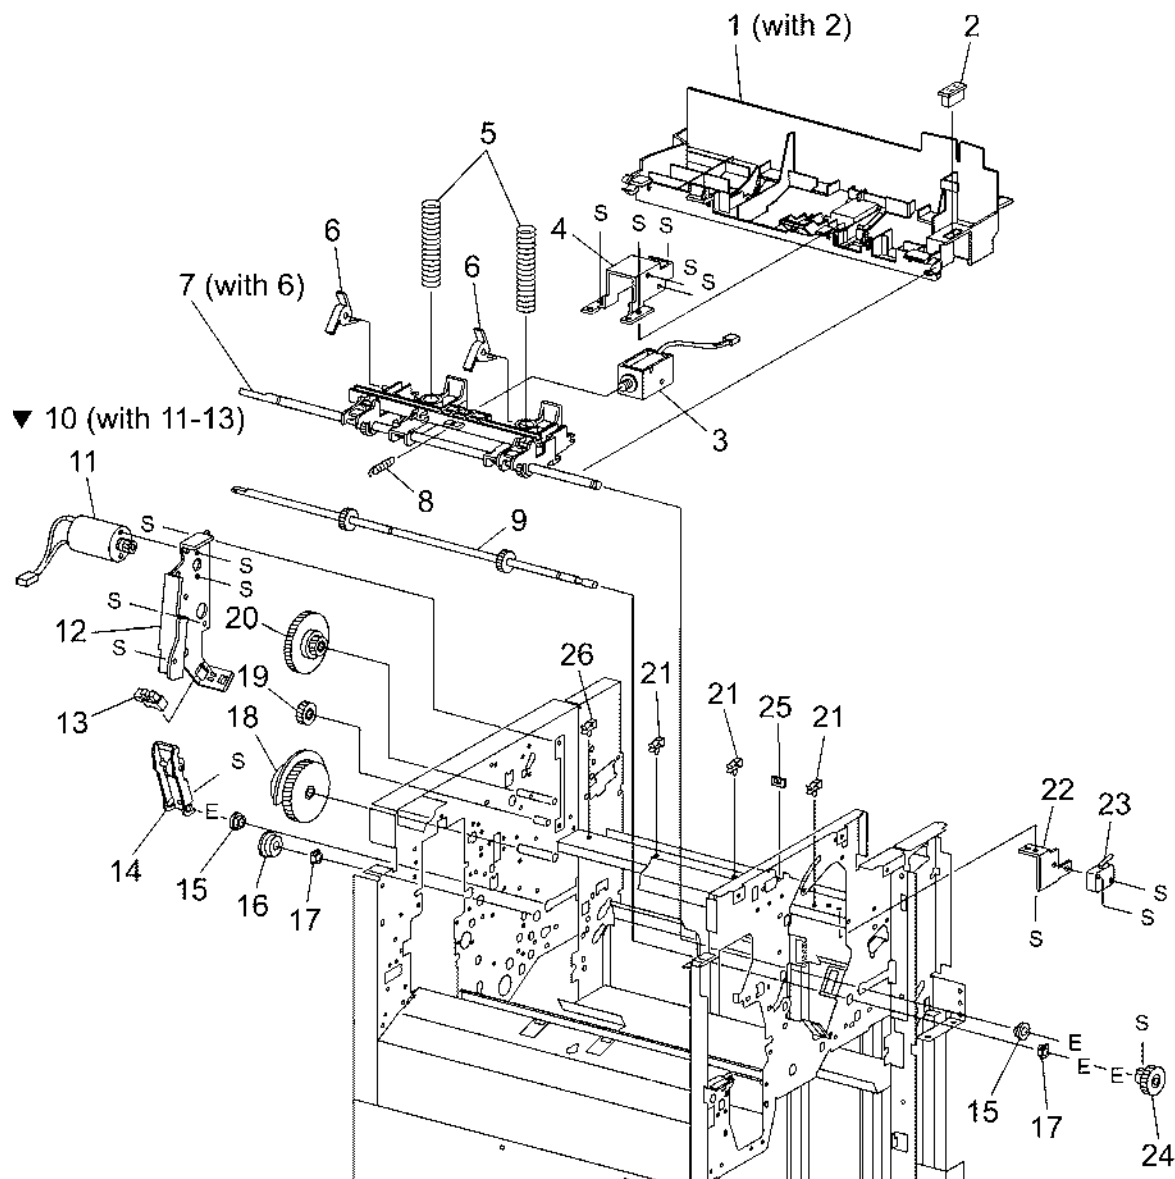

s7760-0793A

PL 21.8 Finisher Eject: 2 of 3


Item	Part	Description
1	—	Compiler Tray Assembly (REP 12.57)
2	130K88770	Tamper Home Sensor (Front, Rear) (P/O PL 21.8 Item 1)
3	130K88780	Compiler Tray No Paper Sensor (P/O PL 21.8 Item 1)
4	—	Sensor Actuator (P/O PL 21.8 Item 1)
5	—	Torsion Spring (P/O PL 21.8 Item 1)
6	—	Front Tamper Motor (P/O PL 21.8 Item 1)
7	—	Rear Tamper Motor (P/O PL 21.8 Item 1)
8	962K27671	Compiler Harness (P/O PL 21.8 Item 1)
9	—	Eject Roll Shaft Assembly
10	—	Set Clamp Paddle (P/O PL 21.8 Item 9)
11	—	Paddle Guide (Not Spared)
12	—	Bushing (Not Spared)
13	—	Bushing (Not Spared)
14	807E04760	Gear (39T)
15	121K34630	Set Clamp Clutch (34T)
16	120E24310	Set Clamp Actuator
17	015K65850	Eject Motor Assembly
18	—	Set Clamp Home Sensor (P/O PL 21.8 Item 17)
19	—	Inner Cover (Not Spared) (REP 12.48)

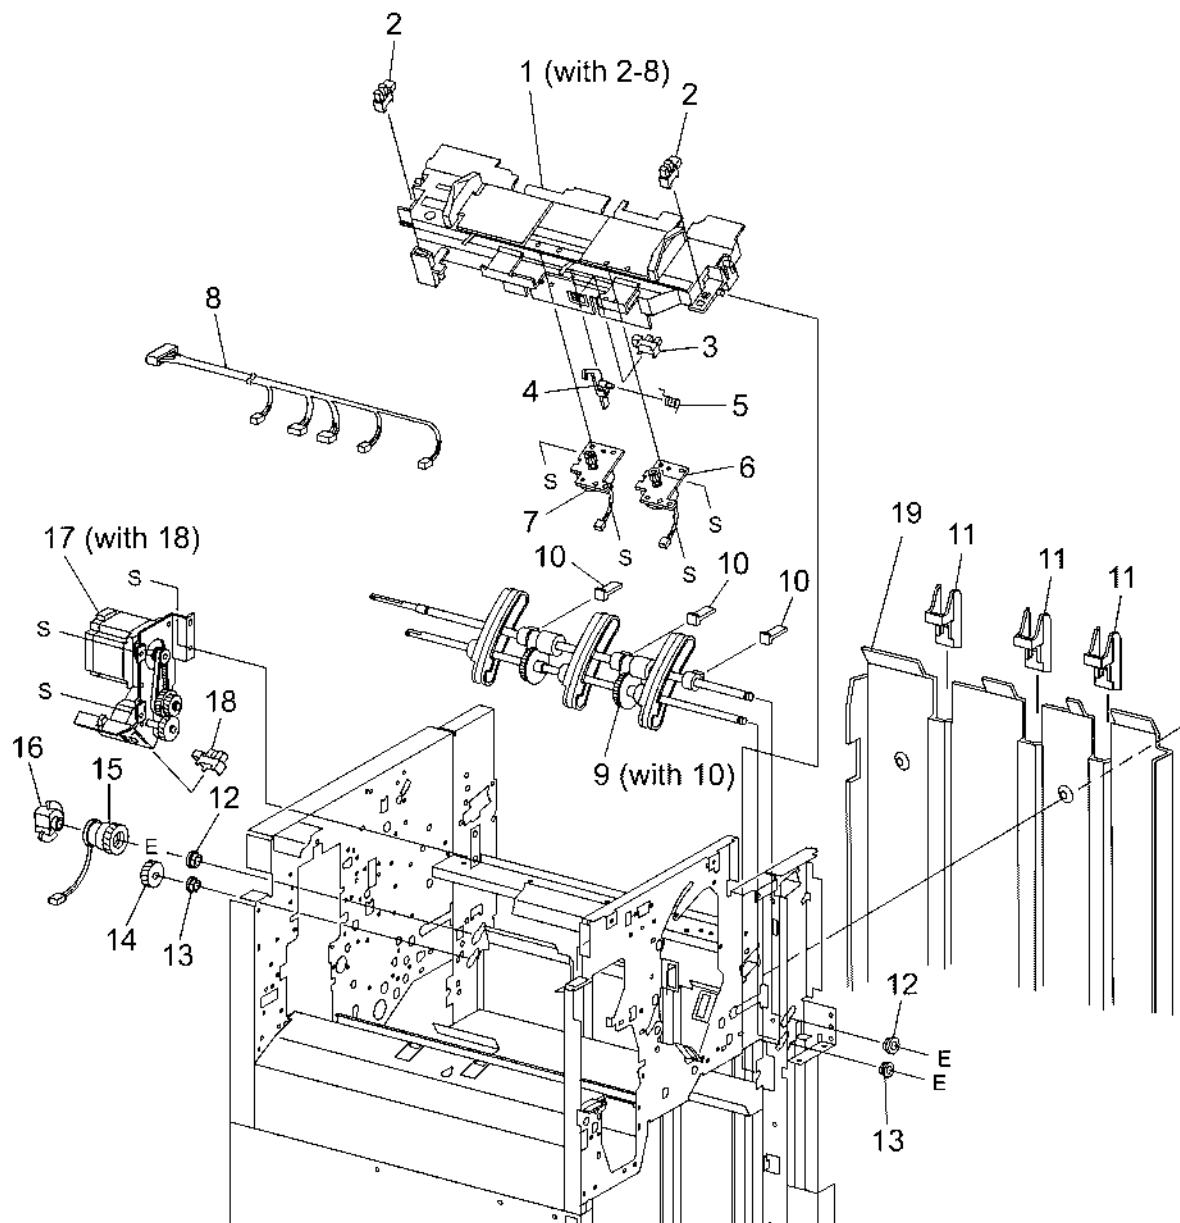

s7760-0794A

PL 21.9 Finisher Eject: 3 of 3


Item	Part	Description
1	—	Sensor Bracket Assembly
2	—	Complier Sensor Harness (P/O PL 21.9 Item 1)
3	130K88190	Complier Exit Sensor (P/O PL 21.9 Item 1)
4	105E13100	Static Eliminator
5	—	Upper Exit Chute (Not Spared)
6	—	Lower Exit Roll (Not Spared)
7	—	Lower Exit Roll Chute Assembly
8	—	Lower Exit Roll Chute (P/O PL 21.9 Item 7)
9	—	Bushing (P/O PL 21.9 Item 7)
10	022K67870	Exit Pinch Roller 1 (P/O PL 21.9 Item 7)
11	022K67880	Exit Pinch Roller 2 (P/O PL 21.9 Item 7)
12	006K24240	Paddle Shaft (P/O PL 21.9 Item 7) (REP 12.59)
13	423W25554	Synchronous Belt (55T) (P/O PL 21.9 Item 7)
14	—	Pulley (17T) (Not Spared)
15	—	Paddle Drive Shaft (Not Spared)
16	—	Pulley (Not Spared)
17	—	Bearing (Not Spared)
18	020E37690	Pulley (20T)
19	—	Gear (23T) (Not Spared)
20	020E37660	Pulley (20T)
21	020E37670	Pulley (44T/20T)
22	—	Gear (23T) (Not Spared)

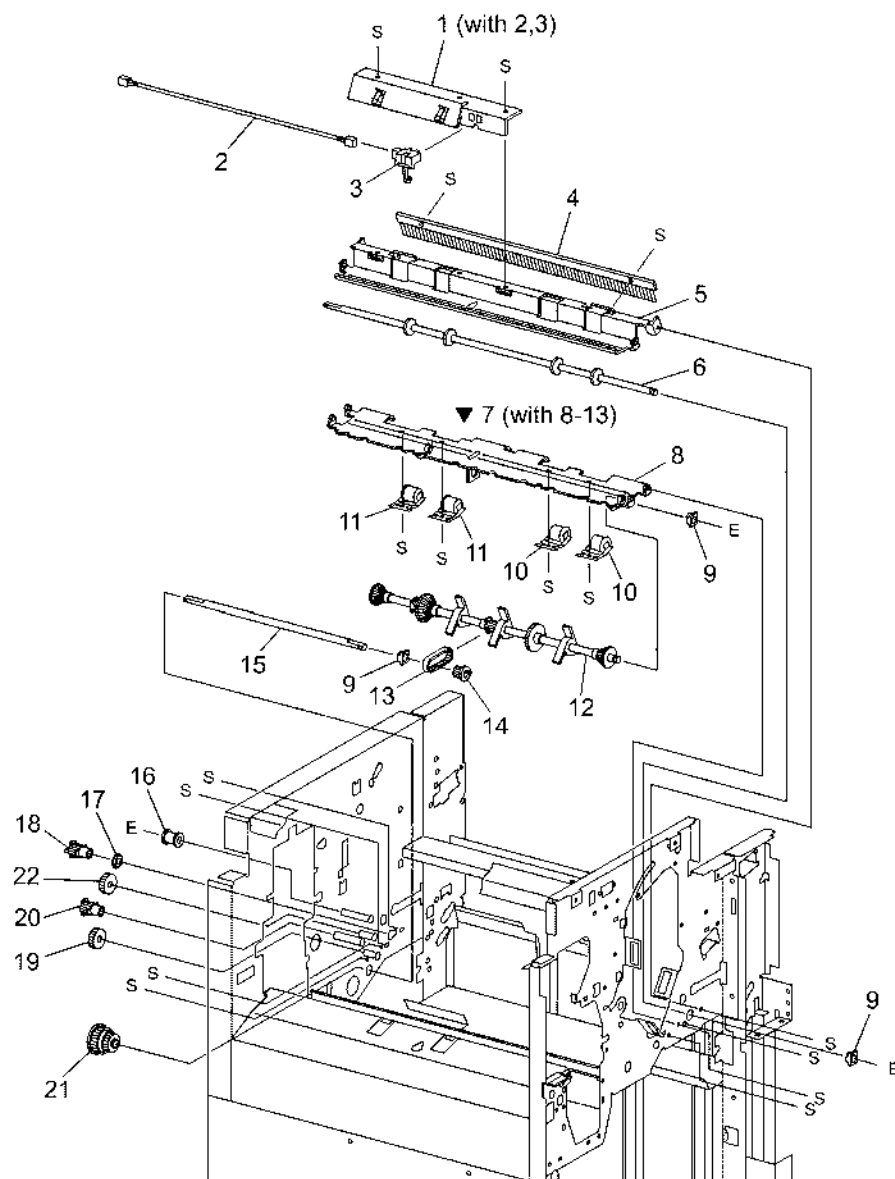

s7760-0795A

PL 21.10 Finisher Transport: 1 of 2


Item	Part	Description
1	—	Upper Exit Open Chute Assembly
2	—	Pinch Roller (P/O PL 21.10 Item 1)
3	—	Spring (P/O PL 21.10 Item 1)
4	—	Shaft (P/O PL 21.10 Item 1)
5	—	Torsion Spring (P/O PL 21.10 Item 1)
6	—	Transport Gate (Not Spared)
7	—	Buffer Gate (Not Spared)
8	121E92890	Magnet (P/O PL 21.10 Item 14)
9	413W11660	Bushing
10	—	Top Buffer Chute Assembly
11	—	Sensor Bracket (P/O PL 21.10 Item 10)
12	130K88190	Buffer Path Sensor (P/O PL 21.10 Item 10) (REP 12.67)
13	022K71010	Buffer Roll (REP 12.64)
14	054K27160	Bottom Buffer Chute Assembly (REP 12.65)
15	—	Exit Pinch roller (P/O PL 21.10 Item 14)
16	—	Upper Entrance Chute Assembly
17	022K67850	Entrance Pinch Roller (P/O PL 21.10 Item 16)
18	—	Sensor Bracket (P/O PL 21.10 Item 16)
19	130E87370	Transport Entrance Sensor (P/O PL 21.10 Item 16)
20	022K70970	Entrance Roll
21	127K40281	Finisher Transport Motor
22	—	Motor Bracket (Not Spared)
23	423W87054	Finisher Transport Motor Belt
24	—	Pulley (Not Spared)
25	—	Tension Spring (Not Spared)
26	—	Tension Bracket (Not Spared)
27	413W66250	Bearing
28	604K36030	Gear (46T)
29	020E37660	Pulley (20T)
30	012E11991	Buffer Link
31	807E04700	Gear (23T)
32	015K65810	Transport Gate Solenoid
33	012E11980	Transport Link
34	015K65821	Buffer Gate Solenoid, Booklet Gate Solenoid
35	—	Booklet Gate (Not Spared)

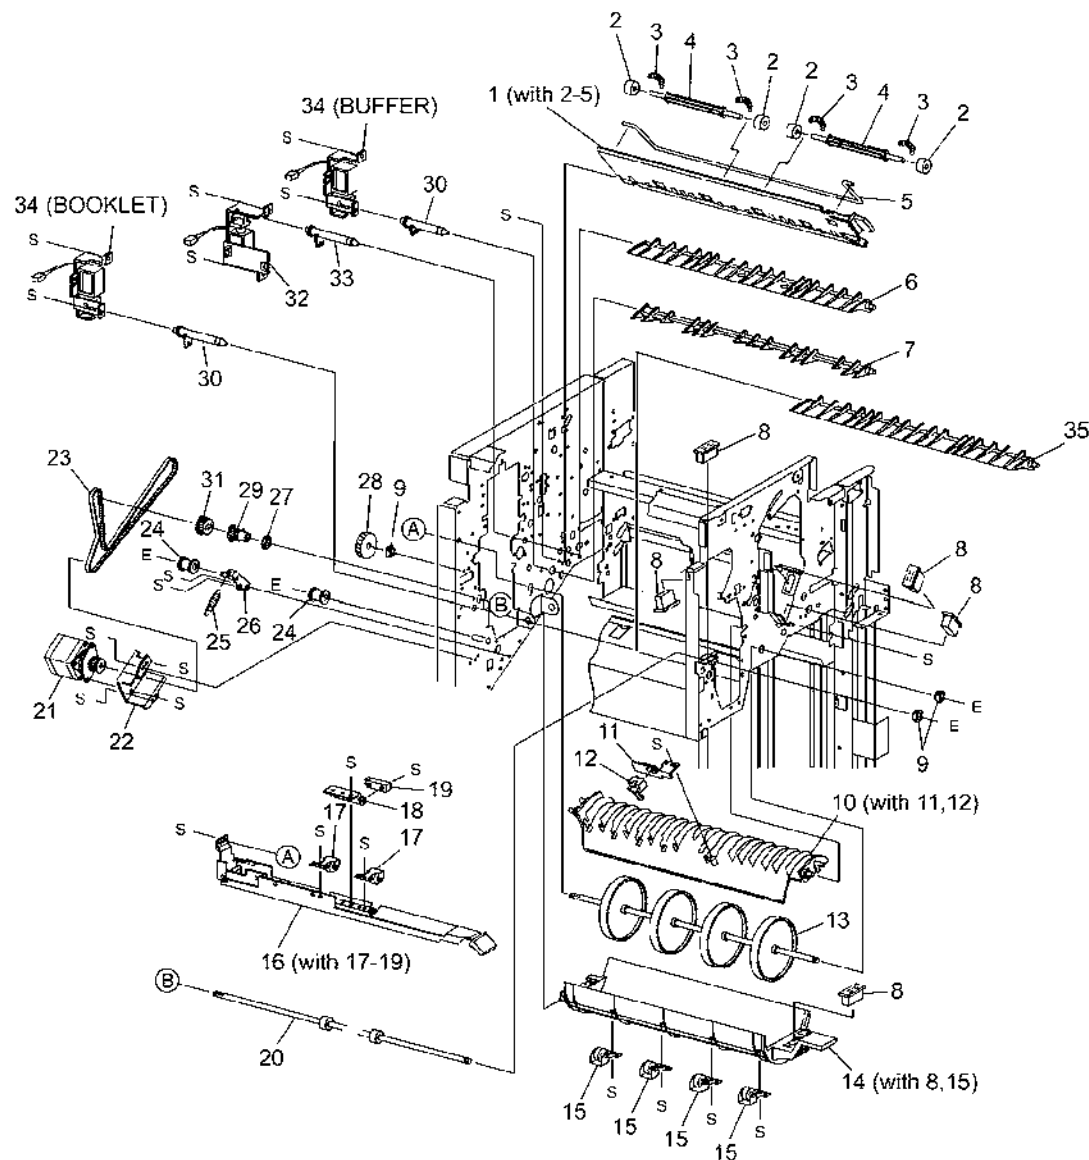

s7750 0796A

PL 21.11 Finisher Transport: 2 of 2


Item	Part	Description
1	—	Top Tray Exit Baffle Assembly (Not Spared)
2	130K88190	Top Tray Exit Sensor (P/O PL 21.11 Item 1)
3	022K67860	Exit Pinch Roller (P/O PL 21.11 Item 1)
4	—	Top Tray Lower Exit Baffle (Not Spared)
5	022K70990	Exit Drive Shaft
6	—	Sensor Bracket (Not Spared)
7	130E87370	Top Tray Full Sensor (REP 12.47)
8	121E92890	Magnet
9	413W11660	Bushing
10	054K27580	Lower Top Exit Chute Assembly
11	—	Pinch Roller (P/O PL 21.11 Item 10)
12	—	Spring (P/O PL 21.11 Item 10)
13	—	Shaft (P/O PL 21.11 Item 10)
14	—	Upper Top Exit Chute Assembly
15	130E80100	Gate Sensor (P/O PL 21.11 Item 14) (REP 12.62)
16	—	Sensor Harness (P/O PL 21.11 Item 14)
17	—	Sensor Bracket (P/O PL 21.11 Item 14)
18	022K70980	Transport Roll
19	020E37680	Pulley (53T/23T)
20	413W66250	Bearing
21	020E37690	Pulley (20T)
22	—	Pulley (Not Spared)
23	—	Tension Bracket (Not Spared)
24	—	Tension Spring (Not Spared)
25	020E37700	Pulley (20T/20T)
26	807E04720	Gear (20T)
27	423W40054	Registration Motor Drive Belt
28	423W86454	Exit Motor Drive Belt
29	—	Motor Bracket (Not Spared)
30	127K40281	Registration Motor (Reg) and Exit Motor (Exit)

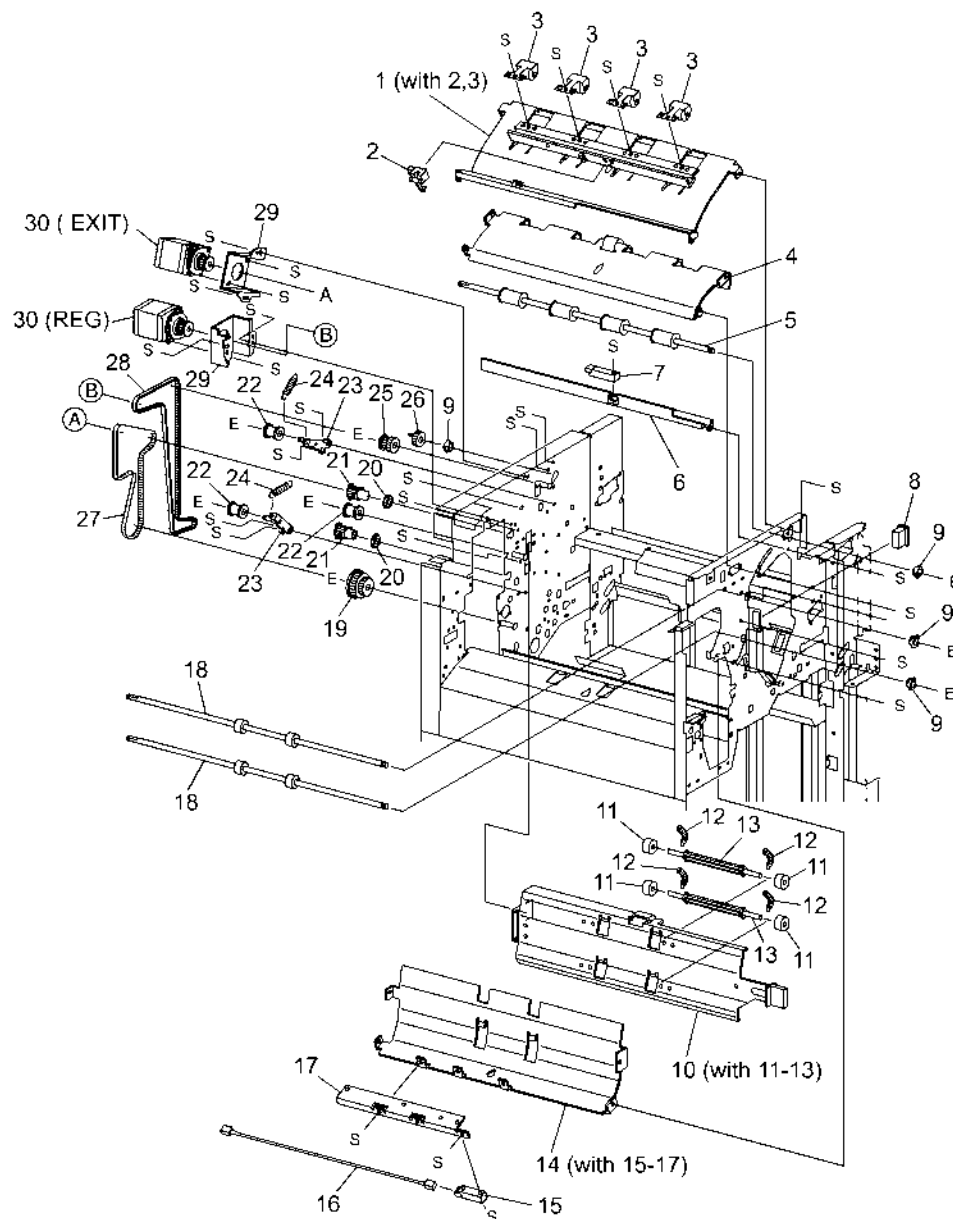

s7760-0797A

PL 21.12 Finisher Electrical


Item	Part	Description
1	—	Left Harness Bracket (Not Spared)
2	—	Right Harness Bracket (Not Spared)
3	960K04681	H-Transport PWB
4	962K29160	Harness
5	960K25040	Finisher PWB (REP 12.68)
6	—	Finisher PWB Bracket (Not Spared)
7	—	Finisher PWB Cover (Not Spared)
8	962K36610	AC Inlet Harness
9	105K21081	Finisher LVPS
10	—	Wire Clamp (Not Spared)
11	—	Wire Clip (Not Spared)
12	—	Wire Clip (Not Spared)
13	—	Wire Clip (Not Spared)
14	—	Wire Clamp (Not Spared)
15	—	Wire Clamp (Not Spared)
16	—	Wire Clamp (Not Spared)
17	—	Wire Clip (Not Spared)
18	—	Wire Clip (Not Spared)
19	—	Booklet PWB Bracket (Not Spared)
20	960K04671	Booklet PWB

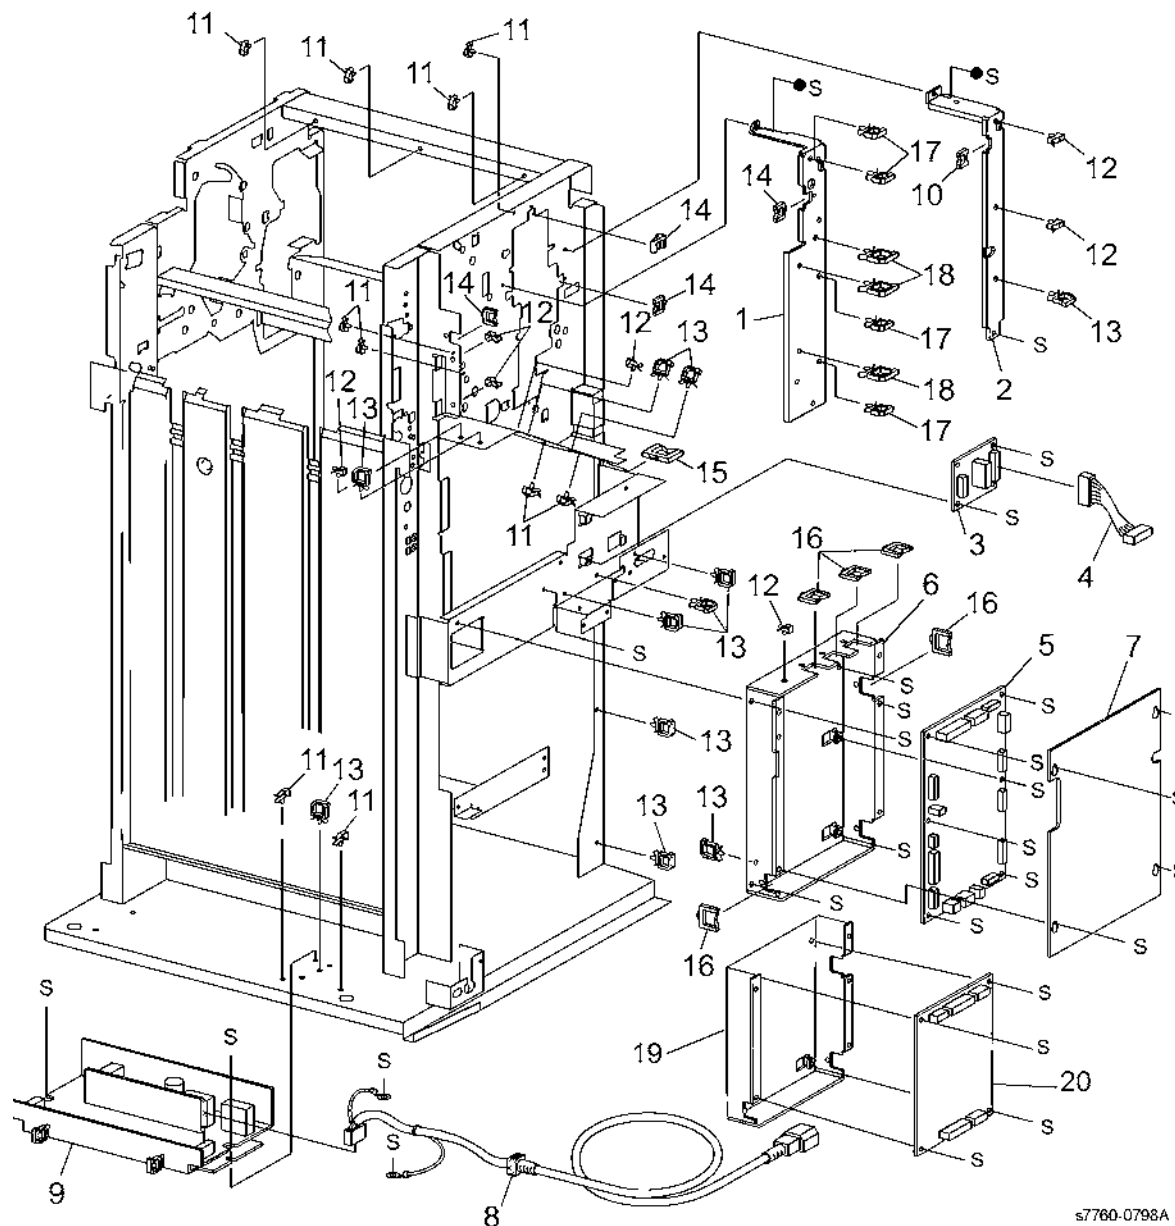

s7760-0798A

PL 21.13 Finisher Harness


Item	Part	Description
1	—	Main Sensor Harness (Not Spared)
2	—	Main Drive Harness (Not Spared)
3	—	Interface Harness (Not Spared)
4	—	Transport Entrance Sensor Harness (Not Spared)
5	—	Buffer Sensor Harness (Not Spared)
6	—	Top Exit Sensor Harness (Not Spared)
7	—	Top Sensor Harness (Not Spared)
8	—	Punch Drive Harness (Not Spared)
9	—	Punch Sensor Harness (Not Spared)
10	—	LVPS Harness (Not Spared)
11	—	Interlock Harness (Not Spared)

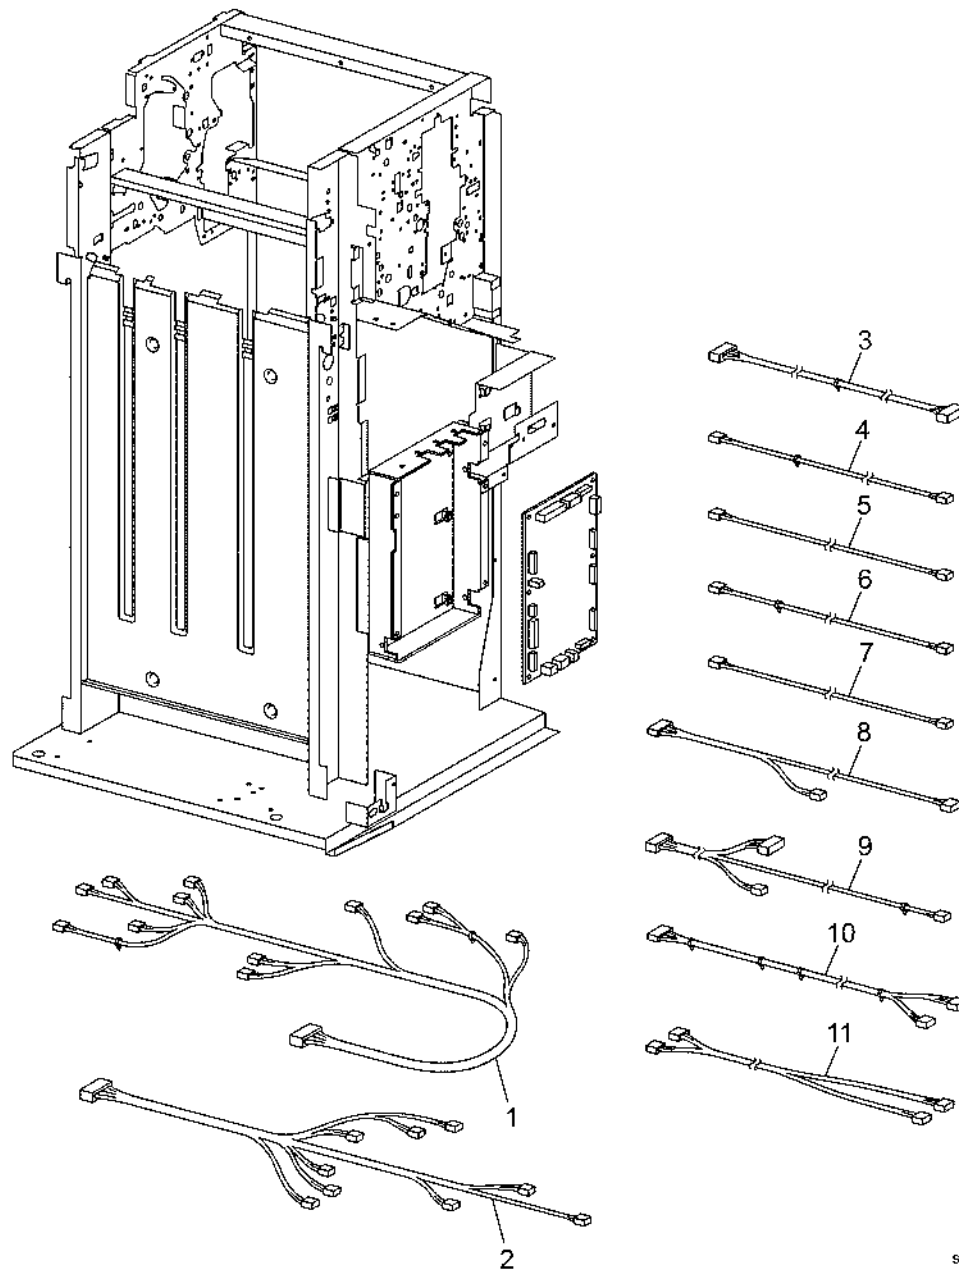

s7760-0799A

PL 21.15 Booklet Accessory


Item	Part	Description
1	—	Label (Not Spared)
2	—	Screw (Not Spared)
3	801K16560	Right Rail
4	—	Cover (Not Spared)
5	050K49300	Booklet Tray Assembly
6	—	Knob Screw (Not Spared)
7	130K88770	Booklet Drawer Set Sensor
8	—	Label (Not Spared)
9	—	Label (Not Spared)
10	—	Label (Not Spared)
11	—	Connector (Not Spared)
12	801K16551	Booklet Drawer Assembly (REP 12.55, ADJ 12.4, ADJ 12.5, ADJ 12.8, ADJ 12.9)
13	801K16580	Left Rail
14	962K29221	Wire Harness

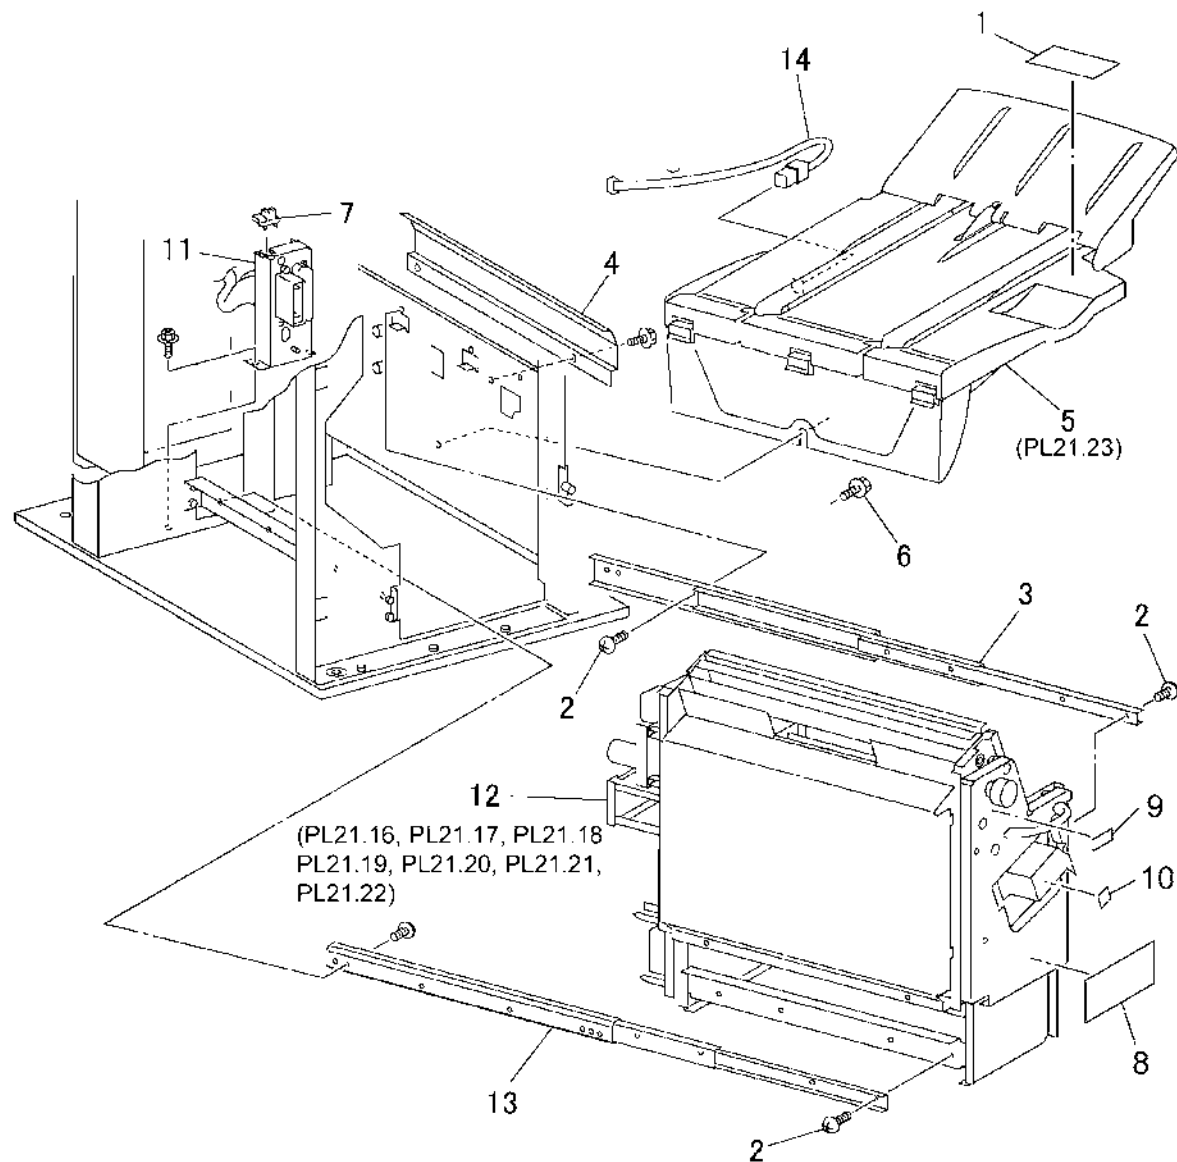

57760-0800A

PL 21.16 Booklet Component - 1


Item	Part	Description
1	801K18730	Right Rail
2	—	Screw (Not Spared)
3	003E59690	Stopper
4	—	Bearing (Not Spared)
5	407W07717	Gear (17T)
6	407W07731	Gear (31T)
7	—	Shaft (Not Spared)
8	—	Ball Bearing (Not Spared)
9	003K13680	Knob
10	029K92290	Stapler (REP 12.56, ADJ 12.6, ADJ 12.7, ADJ 12.10)
11	029K92041	Staple
12	015K67280	Latch
13	—	Bracket (Not Spared)
14	—	Front Cover (Not Spared)
15	—	Label (Not Spared)
16	—	Left Cover (Not Spared)
17	801K16581	Left Rail
18	—	Label (Not Spared)
19	—	Label (Not Spared)
20	604K18740	Paper Skew Guide Kit
21	—	Paper Guide (Center) (Not Spared)
22	—	Paper Guide (Front) (Not Spared)
23	—	Paper Guide (Clinch) (Not Spared)

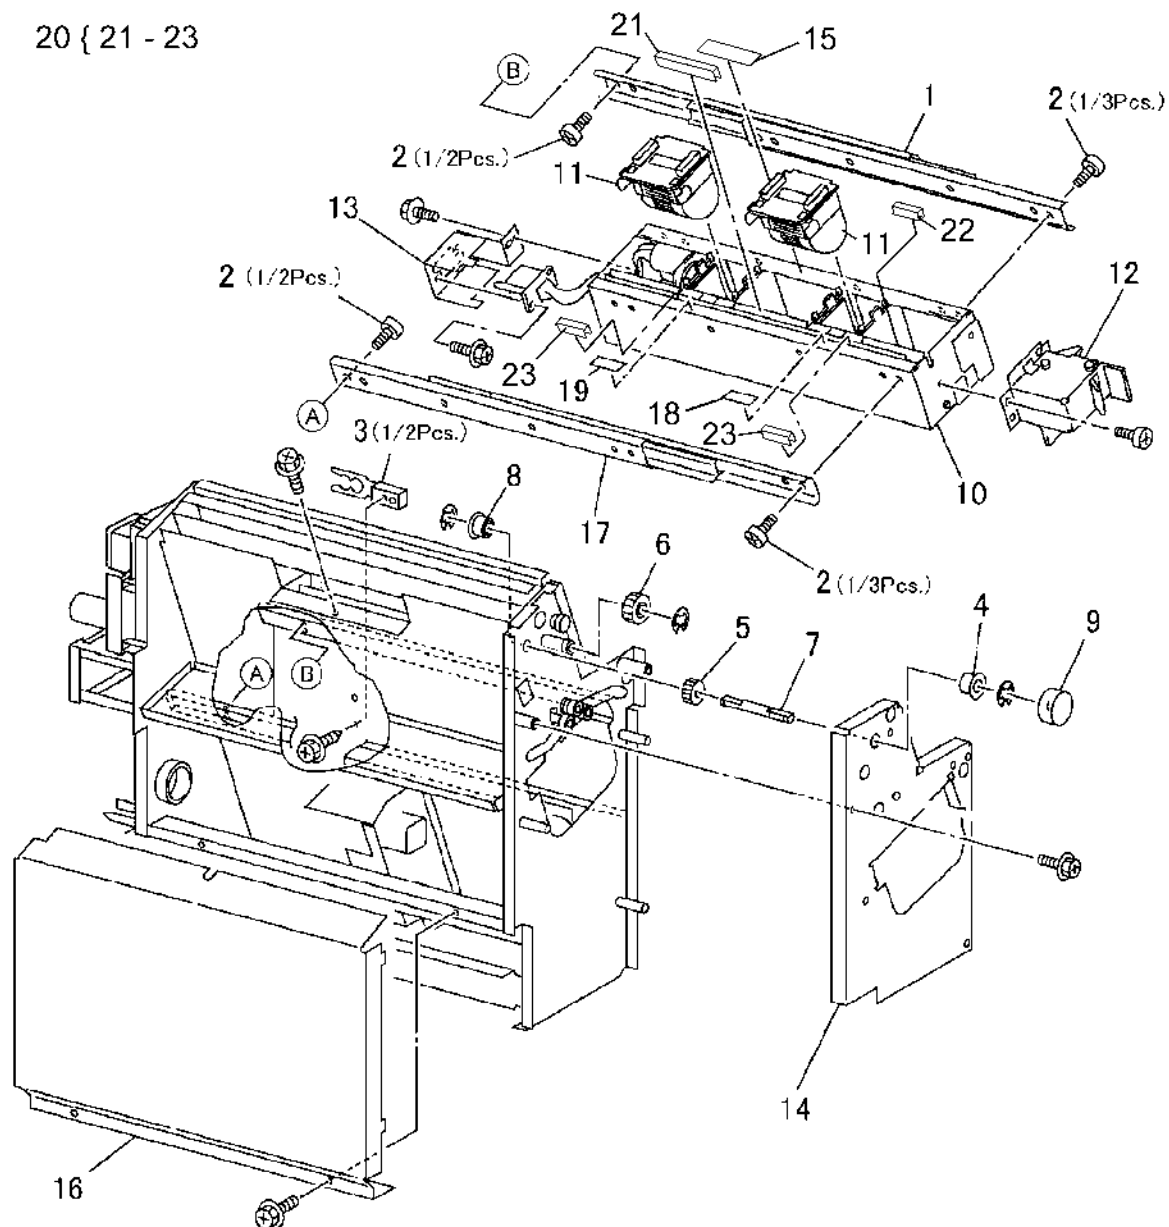

s7760-0801A

PL 21.17 Booklet Component -2 (End Guide)


Item	Part	Description
1	—	Compile Chute (Not Spared)
2	127K46170	Booklet End Guide Motor
3	020E37210	Pulley
4	807E02050	Gear Pulley (40T/20T)
5	—	Washer (Not Spared)
6	423W86254	Belt
7	130K88780	Booklet End Guide Home Sensor
8	—	Shaft (Not Spared)
9	—	Bracket (P/O PL 21.17 Item 27)
10	807E02070	Gear (14T)
11	—	Booklet Paddle Motor (P/O PL 21.17 Item 27)
12	—	Gear (14T) (P/O PL 21.17 Item 27)
13	—	Bracket (Not Spared)
14	—	Stopper (Not Spared)
15	—	Screw (Not Spared)
16	—	Bearing (Not Spared)
17	—	Roll (Not Spared)
18	—	Shaft (P/O PL 21.17 Item 28)
19	—	Gear (14T) (P/O PL 21.17 Item 28)
20	—	Paddle (P/O PL 21.17 Item 28)
21	—	Bearing (P/O PL 21.17 Item 28)
22	—	End Guide (Not Spared)
23	—	Support Bracket (Not Spared)
24	—	Adjust Bracket (Not Spared) (ADJ 12.4)
25	—	Chute (Front) (Not Spared)
26	—	Chute (Rear) (Not Spared)
27	015K60410	Booklet Paddle Motor Assembly
28	006K22960	Paddle Shaft Assembly
29	—	Paper Guide (Not Spared)

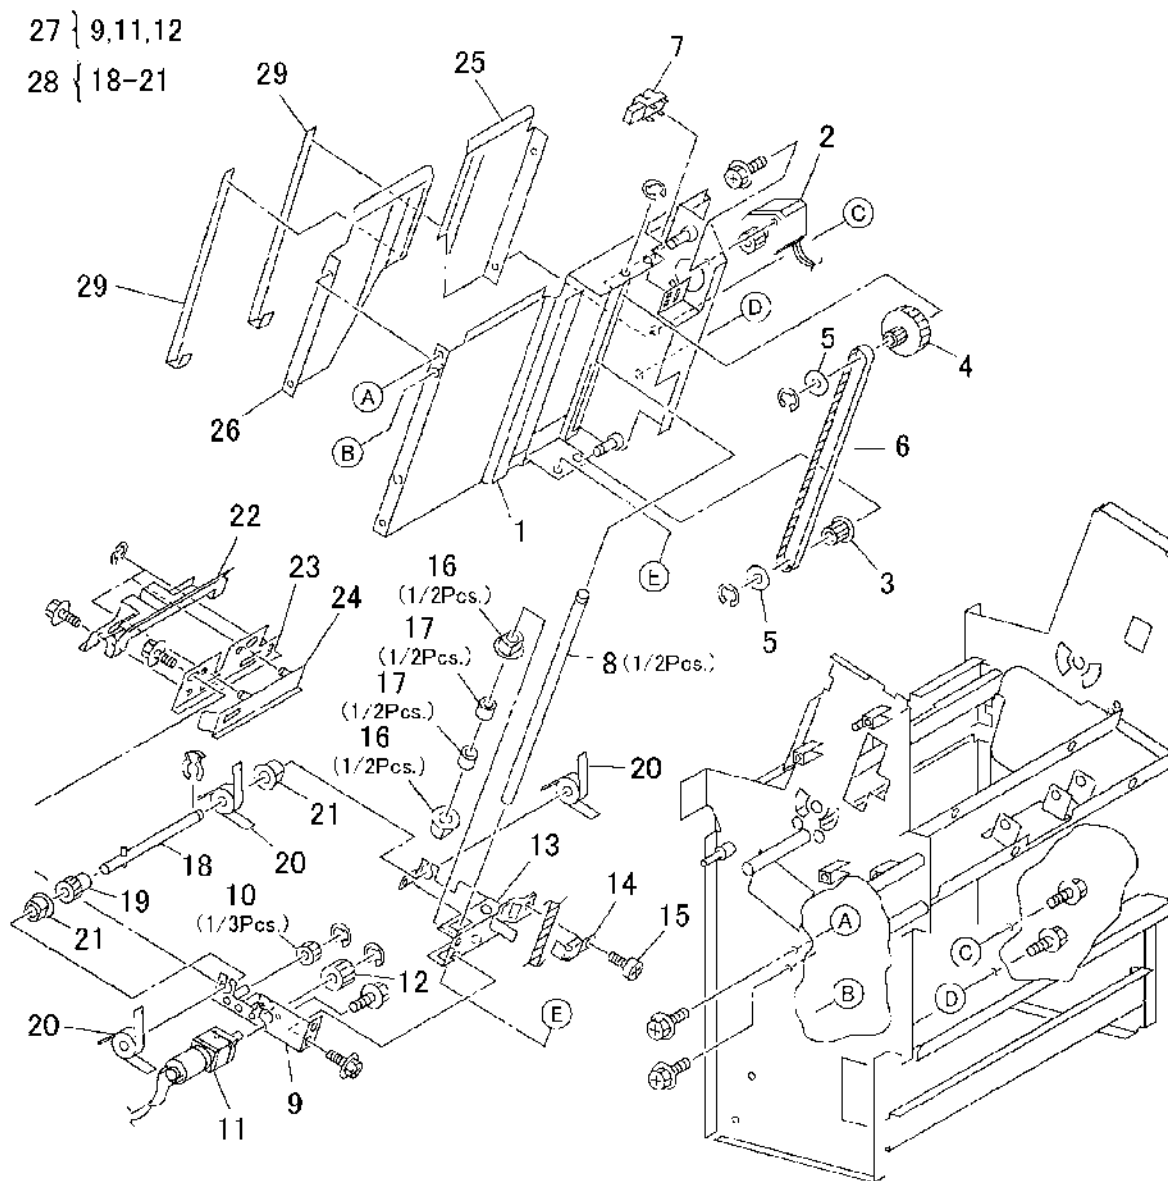

s7760-0802A

PL 21.18 Booklet Component -3

Item	Part	Description
1	—	Bracket (Not Spared)
2	962K18401	Wire Harness
3	130K88780	Knife Home Sensor, Knife Folder Sensor
4	—	Chute (Not Spared)
5	—	Shaft (Not Spared)
6	—	Actuator (Not Spared)
7	—	Bearing (Not Spared)
8	—	Joint (Not Spared)
9	—	Shaft (Not Spared)
10	—	Shaft (Not Spared)
11	—	Bearing (Not Spared)
12	—	Bracket (Not Spared)
13	015K67271	Bracket Assembly Knife
14	—	Guide (Not Spared)
15	—	Shaft (Not Spared)
16	—	Shaft (Not Spared)
17	807E02060	Gear (42T)
18	—	Bracket (Not Spared)
19	130E87410	Booklet Compile No Paper Sensor

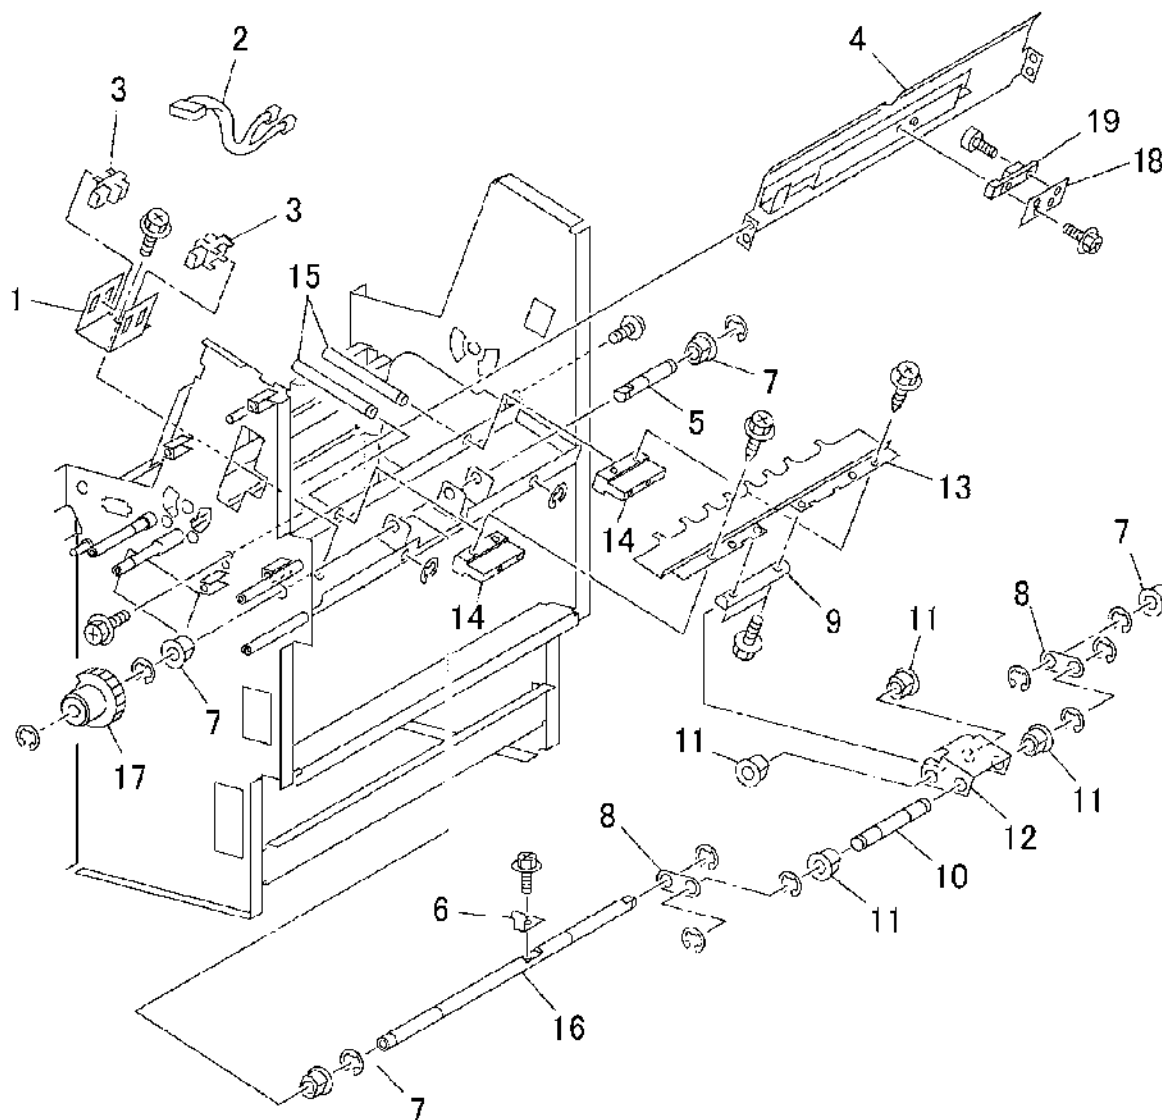


s7760-0803A

PL 21.19 Booklet Component -4

Item	Part	Description
1	038K87360	Front Tamper Guide
2	—	Rear Tamper Guide (P/O PL 21.19 Item 8)
3	—	Spring (P/O PL 21.19 Item 8)
4	—	Rack (P/O PL 21.19 Item 8)
5	—	Bearing (P/O PL 21.19 Item 8)
6	—	Roll (P/O PL 21.19 Item 8)
7	130K88780	Booklet Tamper Home Sensor (Front and Rear)
8	038K87371	Rear Tamper Assembly
9	127K48210	Booklet Tamper Motor (Front and Rear)
10	—	Bracket (Not Spared) (Not Spared)
11	105E15120	Static Eliminator
12	013E25490	Roll
13	—	Frame (Not Spared)


8 { 2-6

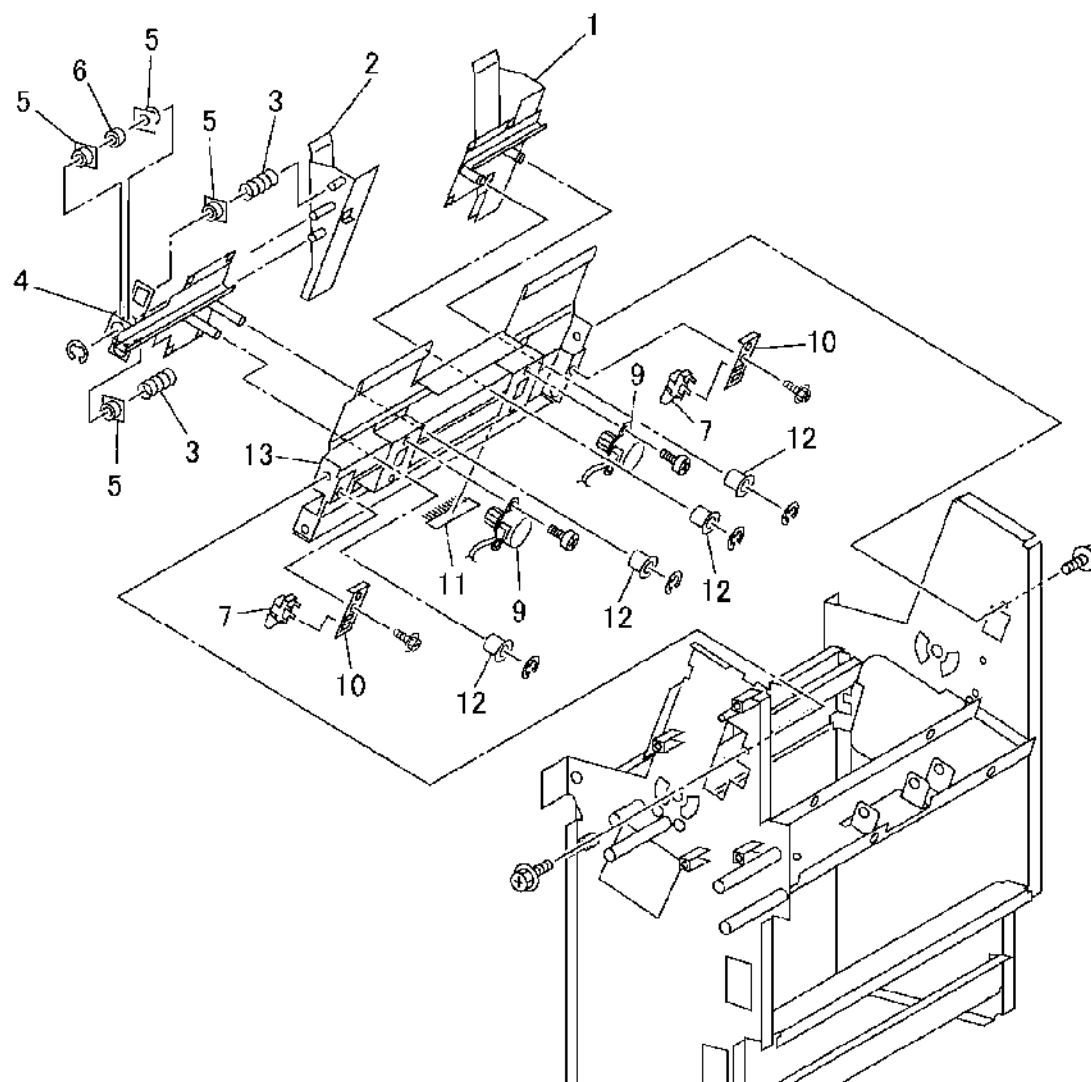

S7760-08C4A

PL 21.20 Booklet Component -5

Item	Part	Description
1	022K71020	Booklet Pre-Folding Roll
2	022K71040	Booklet Pre-Folding Nip Roll
3	022K66870	Booklet Folding Roll
4	022K66880	Booklet Folding Nip Roll
5	—	Ball Bearing (Not Spared)
6	—	Shaft (Not Spared)
7	013E25480	Bearing
8	—	Tension Plate 1 (Not Spared)
9	809E59991	Spring (ADJ 12.7)
10	—	Tension Plate 2 (Not Spared)
11	809E59981	Spring
12	—	Booklet Eject Roll (Not Spared)
13	—	Pulley (16T) (Not Spared)
14	—	Flange (Not Spared)
15	807E02040	Gear Pulley (20T/25T)
16	423W46754	Belt
17	007E89980	Gear (16T)
18	007E89990	Gear (38T/18T)
19	007E89970	Gear (18T)
20	407W07516	Gear (16T)
21	007E77770	Gear (38T)

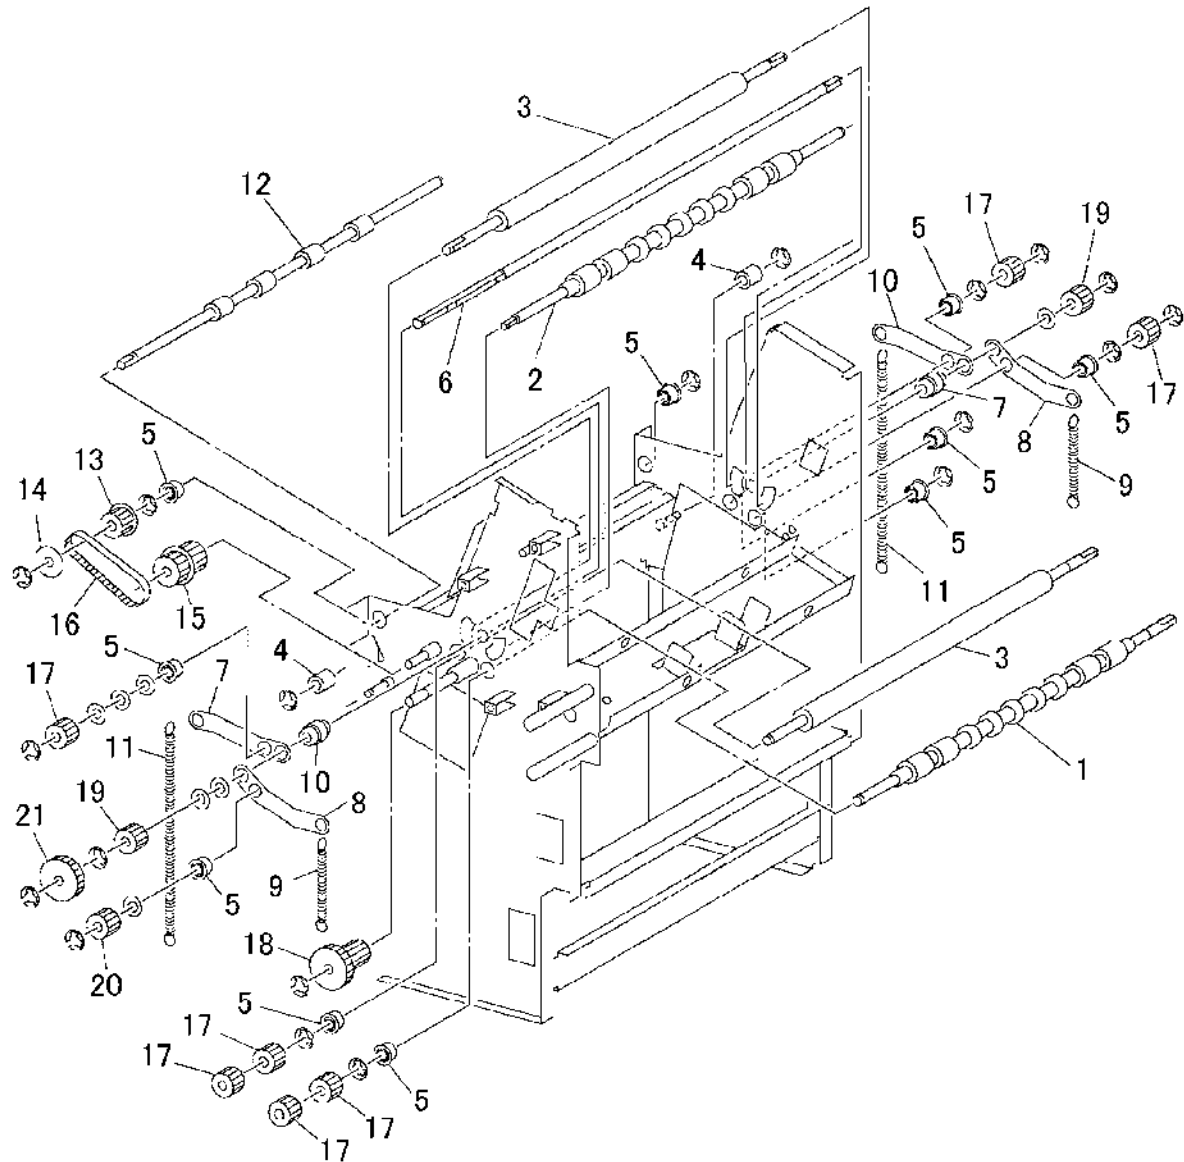


s7760-0805A

PL 21.21 Booklet Component -6 (Chute)

Item	Part	Description
1	—	Chute (Not Spared)
2	105E15140	Static Eliminator
3	—	Screw (P/O PL 21.21 Item 15)
4	—	Bracket (Not Spared)
5	130E87370	Booklet In Sensor
6	059K00521	Pinch Roll
7	—	Chute (Not Spared)
8	—	Booklet In Roll (Not Spared)
9	—	Ball Bearing (Not Spared)
10	407W07516	Gear (16T)
11	—	Shaft (Not Spared)
12	407W08727	Gear (27T)
13	—	Bearing (Not Spared)
14	—	Gear (17T) (Not Spared)
15	054K28570	Upper Exit Chute Assembly
16	003E63380	Knob
17	105E12170	Static Eliminator
18	—	Upper Exit Chute (P/O PL 21.21 Item 15)
19	—	Bracket (Not Spared)
20	962K18411	Wire Harness
21	130E87410	Booklet Folder Roll Exit Sensor
22	—	Lower Exit Chute (Not Spared)
23	121E92720	Magnet
24	105E12080	Static Eliminator

15 { 3,16-18

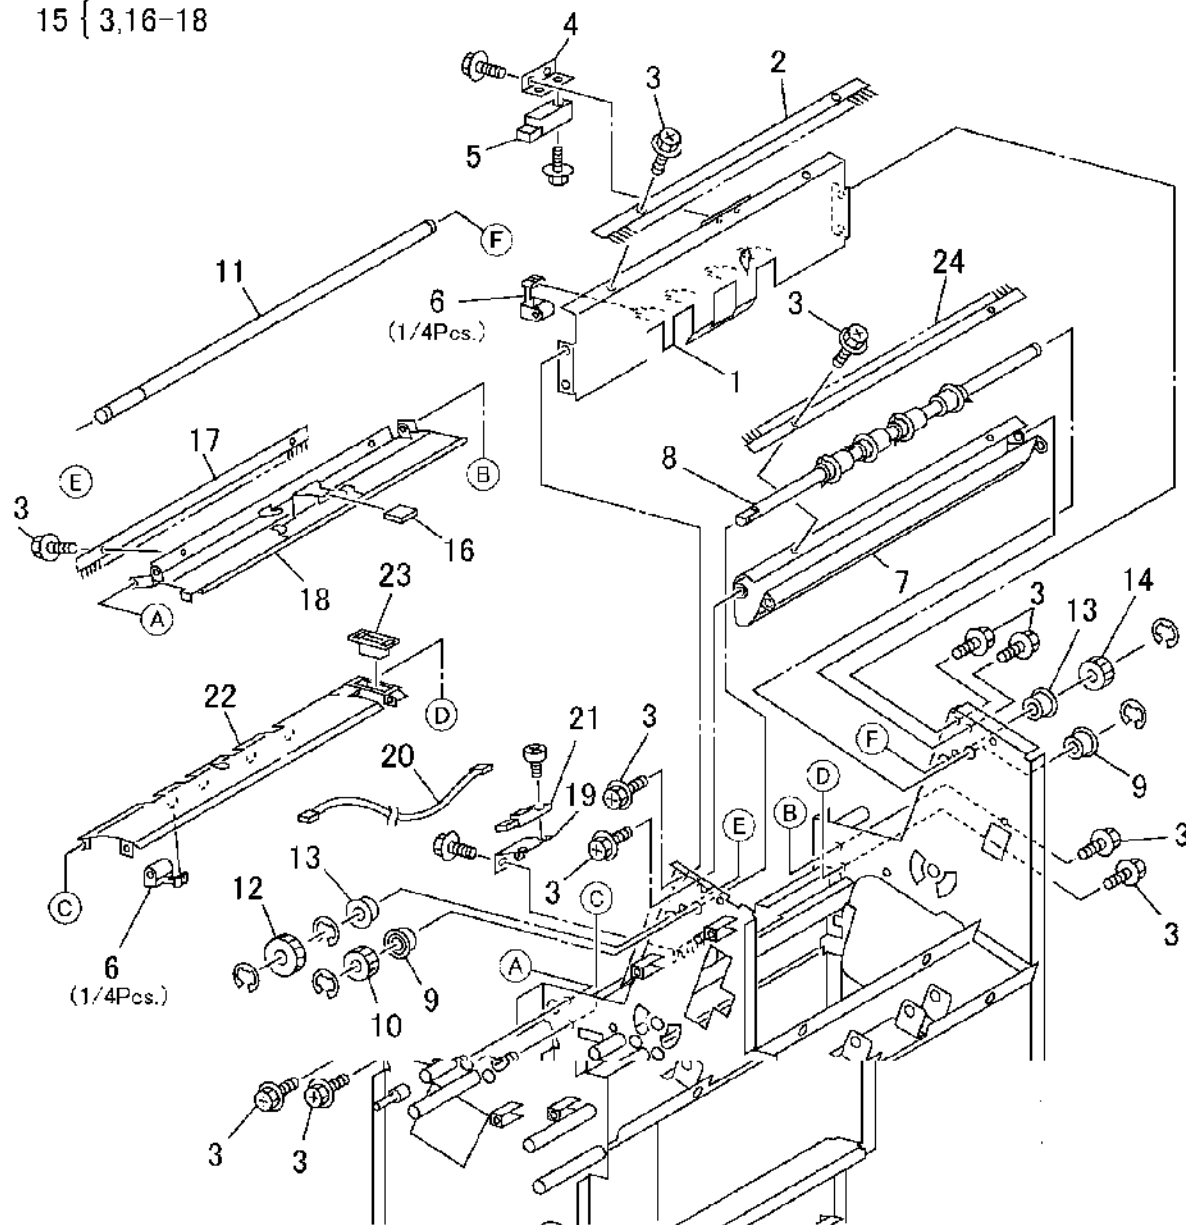


s7760-0806A

PL 21.22 Booklet Component -7

Item	Part	Description
1	—	Bracket (Not Spared)
2	—	Booklet Fold Motor (P/O PL 21.22 Item 24)
3	—	Bracket (P/O PL 21.22 Item 24)
4	127K46170	Booklet Paper Path Motor
5	—	Bracket (P/O PL 21.22 Item 25)
6	—	Bracket (Not Spared)
7	007E77620	Gear (45T)
8	007E77610	Gear (43T/14T)
9	007E77600	Gear (44T/16T)
10	121K31360	Knife Solenoid
11	807E01750	Gear (27T/34T)
12	—	Ball Bearing (Not Spared)
13	809E41620	Spring
14	962K18420	Wire Harness
15	962K18431	Wire Harness
16	962K18441	Wire Harness
17	—	Bracket (Not Spared)
18	—	Bracket (Not Spared)
19	—	Bracket (Not Spared)
20	809E41570	Spring
21	—	Spacer (Not Spared)
22	807E02080	Gear (48T/18T)
23	—	Link (Not Spared)
24	015K69650	Booklet Fold Motor Assembly
25	—	Booklet Paper Path Motor Assembly

24 { 2,3


25 { 4,5

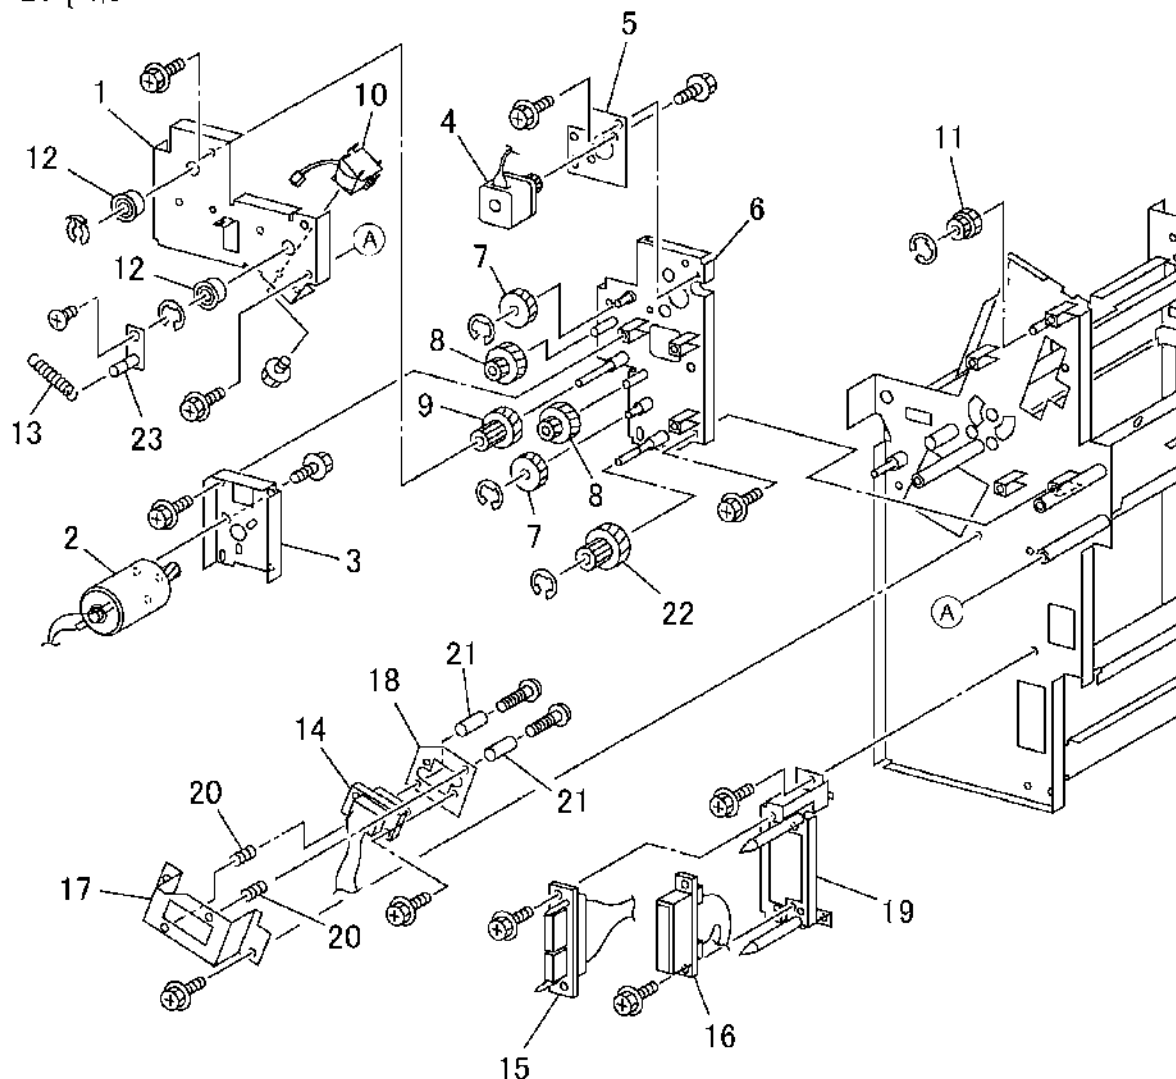

s7760-0807A

PL 21.23 Booklet Tray Component


Item	Part	Description
1	050E19901	Tray
2	—	Upper Tray (Not Spared)
3	—	Bracket (Not Spared)
4	127K38050	Tray Belt Drive Motor
5	—	Bracket (Not Spared)
6	—	Spring (Not Spared)
7	—	Gear Pulley (Not Spared)
8	—	Roll (Not Spared)
9	—	Belt (Not Spared)
10	—	Pulley (Not Spared)
11	—	Bearing (Not Spared)
12	—	Roll (Not Spared)
13	—	Shaft (Not Spared)
14	—	Shaft (Not Spared)
15	130K64300	Booklet No Paper Sensor
16	—	Bracket (Not Spared)
17	—	Actuator (P/O PL 21.23 Item 21)
18	—	Spring (P/O PL 21.23 Item 21)
19	—	Bracket (Not Spared)
20	—	Lower Tray (Not Spared)
21	604K13840	Actuator Assembly

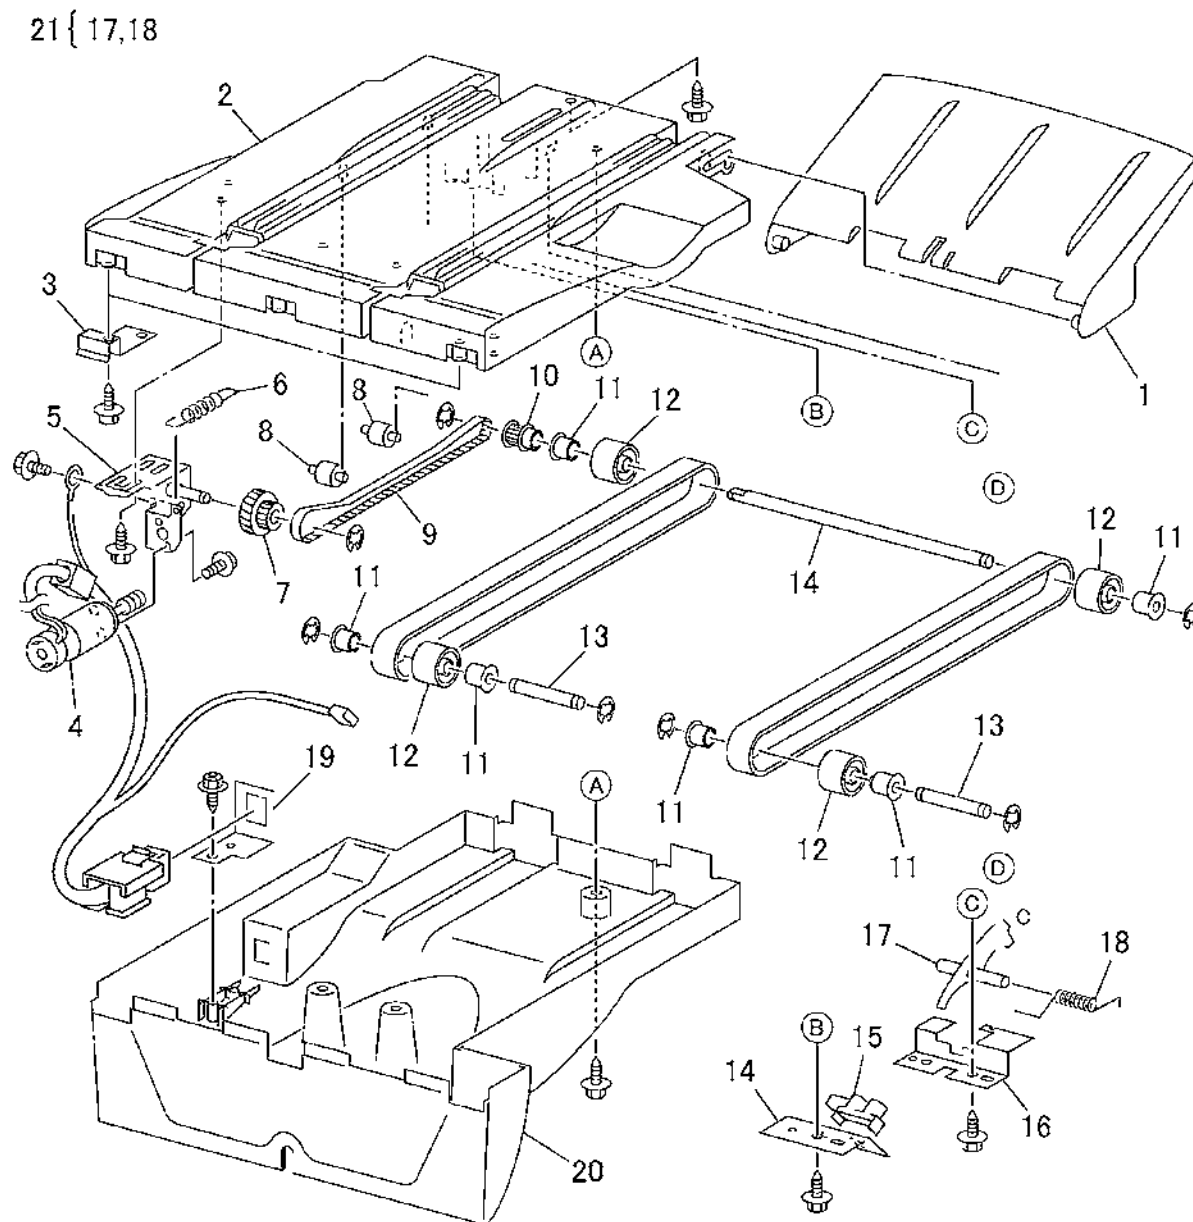

s7760-0808A


PL 21.24 H-Transport: 1 of 4

Item	Part	Description
1	—	H-Transport Center Tray (Not Spared)
2	022K71111	Pinch Spring Assembly
3	022K71121	Pinch Spring Assembly
4	—	Upper Decurler Cover (Not Spared)
5	—	Harness Assembly (Not Spared)
6	—	Decurler Cover (Not Spared)
7	—	Cover (Not Spared)
8	003E61620	Knob
9	—	Top Exit Cover (Not Spared)
10	—	Latch Bracket (Not Spared)
11	110K12282	Interlock Switch
12	113E20900	Interlock Switch Harness

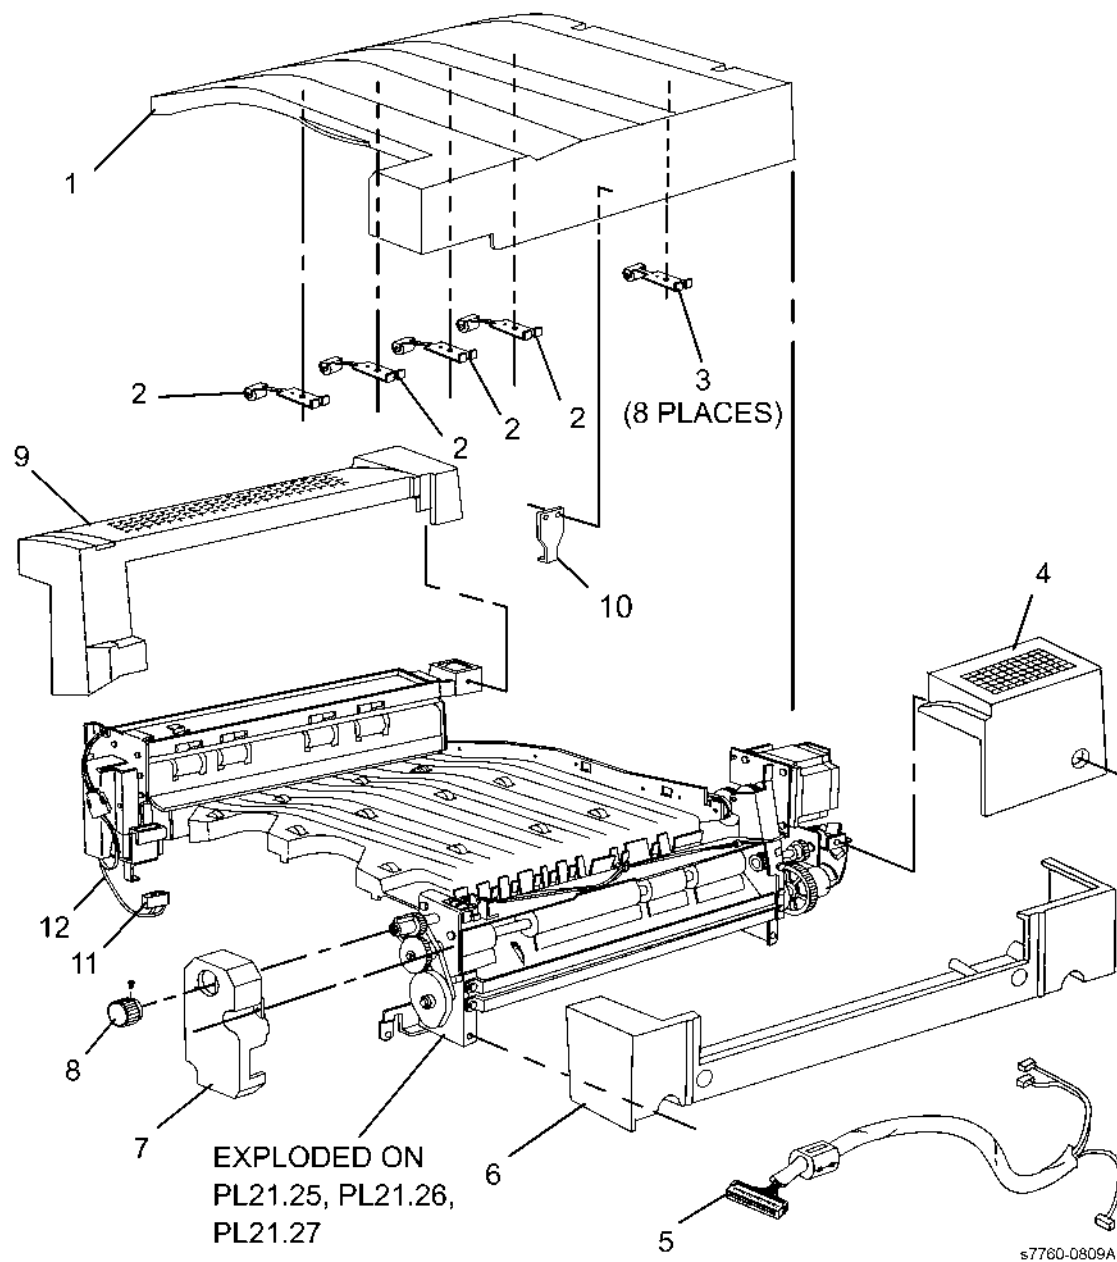

PL 21.25 H-Transport: 2 of 4


Item	Part	Description
1	022K67641	Decurler Roll
2	031E94651	Decurler Arm
3	008E94070	Decurler Cam
4	007K89451	Gear (20T)
5	807E08980	Gear
6	604K25210	Knob Gear
7	130K88780	H-Transport Interlock Sensor
8	130K88291	H-Transport Entrance Sensor
9	012E12110	Guide
10	121K34421	Gate Solenoid
11	—	Solenoid Bracket (Not Spared)
12	—	Solenoid Cover (Not Spared)
13	020E37490	Pulley (18T)
14	423W26754	Exit Drive Roll Belt (67T)
15	012E12170	Gate Link
16	130E88350	Center Tray Exit Sensor
17	050E89621	Entrance Gate
18	130K87970	H-Transport Exit Sensor

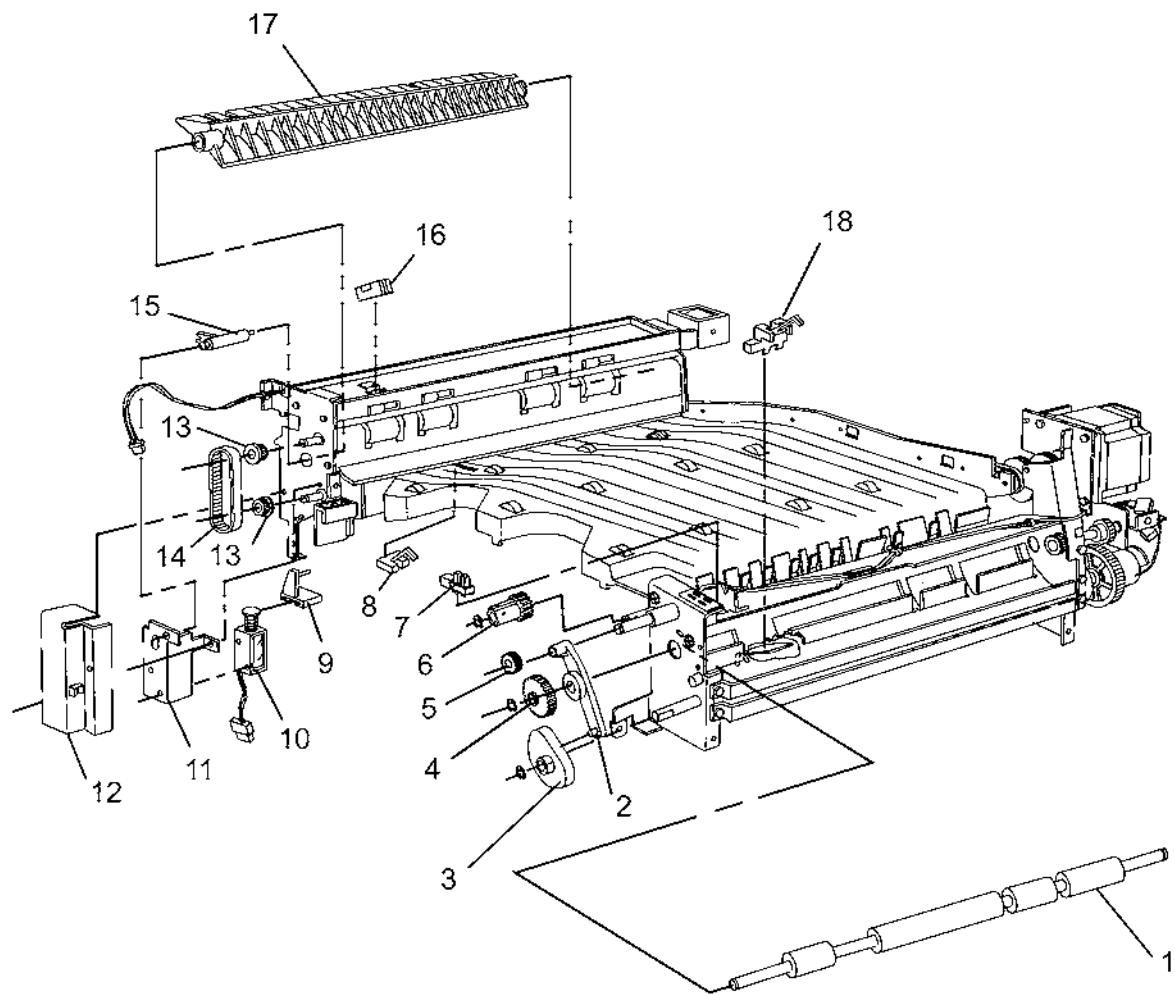

s7760-0810A

PL 21.26 H-Transport: 3 of 4


Item	Part	Description
1	121K24610	Decurler Cam Clutch
2	008E94070	Decurler Cam
3	—	Decurler Arm (Not Spared)
4	—	Bushing (Not Spared)
5	020E37480	Pulley (20T)
6	423W27854	H-Transport Motor Belt (78T)
7	807E08600	Gear (20T)
8	—	Cover (Not Spared)
9	127K40051	H-Transport Drive Motor
10	130K88780	Decurler Cam Sensor
11	807E04000	Gear (24T)
12	—	Shaft (Not Spared)
13	—	Pin (Not Spared)
14	807E04010	Gear (20T/24T)
15	120E20690	Sensor Flag
16	007K89440	One Way Gear (18T)

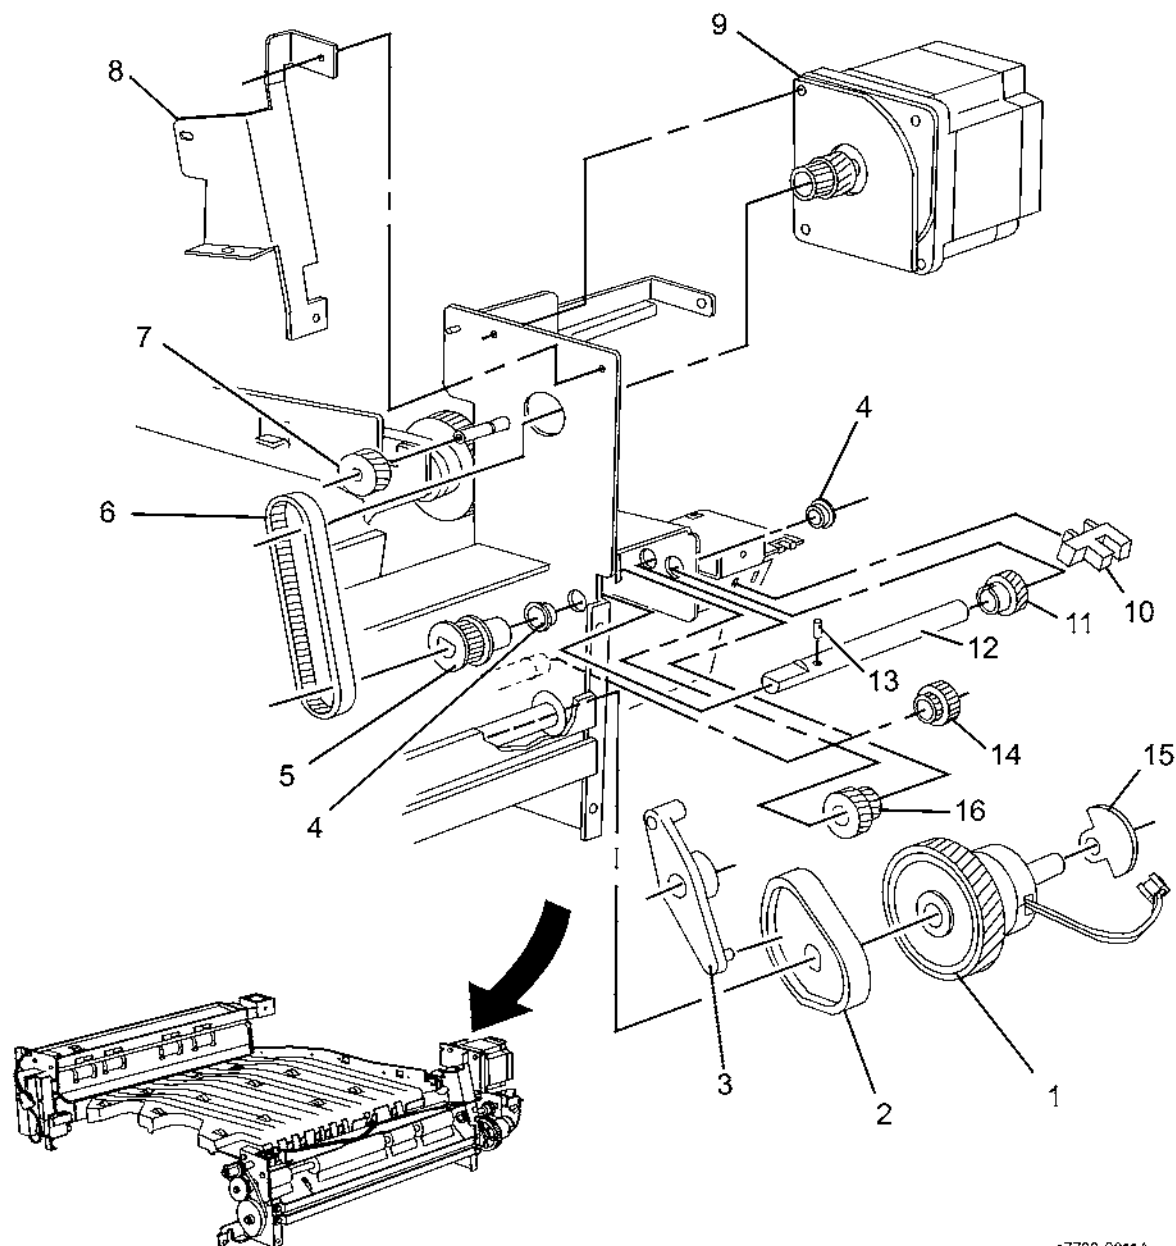

s7760-0811A

PL 21.27 H-Transport: 4 of 4

Item	Part	Description
1	121K35313	Tray Nip Solenoid (P/O PL 21.27 Item 20)
2	—	Pin (P/O PL 21.27 Item 20)
3	—	Tray Nip Link (P/O PL 21.27 Item 20)
4	—	Support Bracket (Not Spared)
5	—	Bracket (Not Spared)
6	022K67631	H-Transport Drive Roll
7	020E37750	Pulley (26T)
8	020E37440	Pulley (18T)
9	020K10760	One Way Pulley
10	022E27700	Idler Roll
11	022K67652	Exit Drive Roll
12	423W88254	H-Transport Drive Belt (450T) (REP 12.66)
13	020E37460	Gear Pulley (40T/26T)
14	—	Spring (Not Spared)
15	809E56092	Pinch Roll Spring
16	013E26740	Bushing
17	022E27750	Exit Pinch Roll
18	054E26112	Upper Exit Chute
19	—	Pinch Roll Shaft (Not Spared)
20	121K35312	Tray Nip Solenoid Assembly
21	—	Bracket (Not Spared)

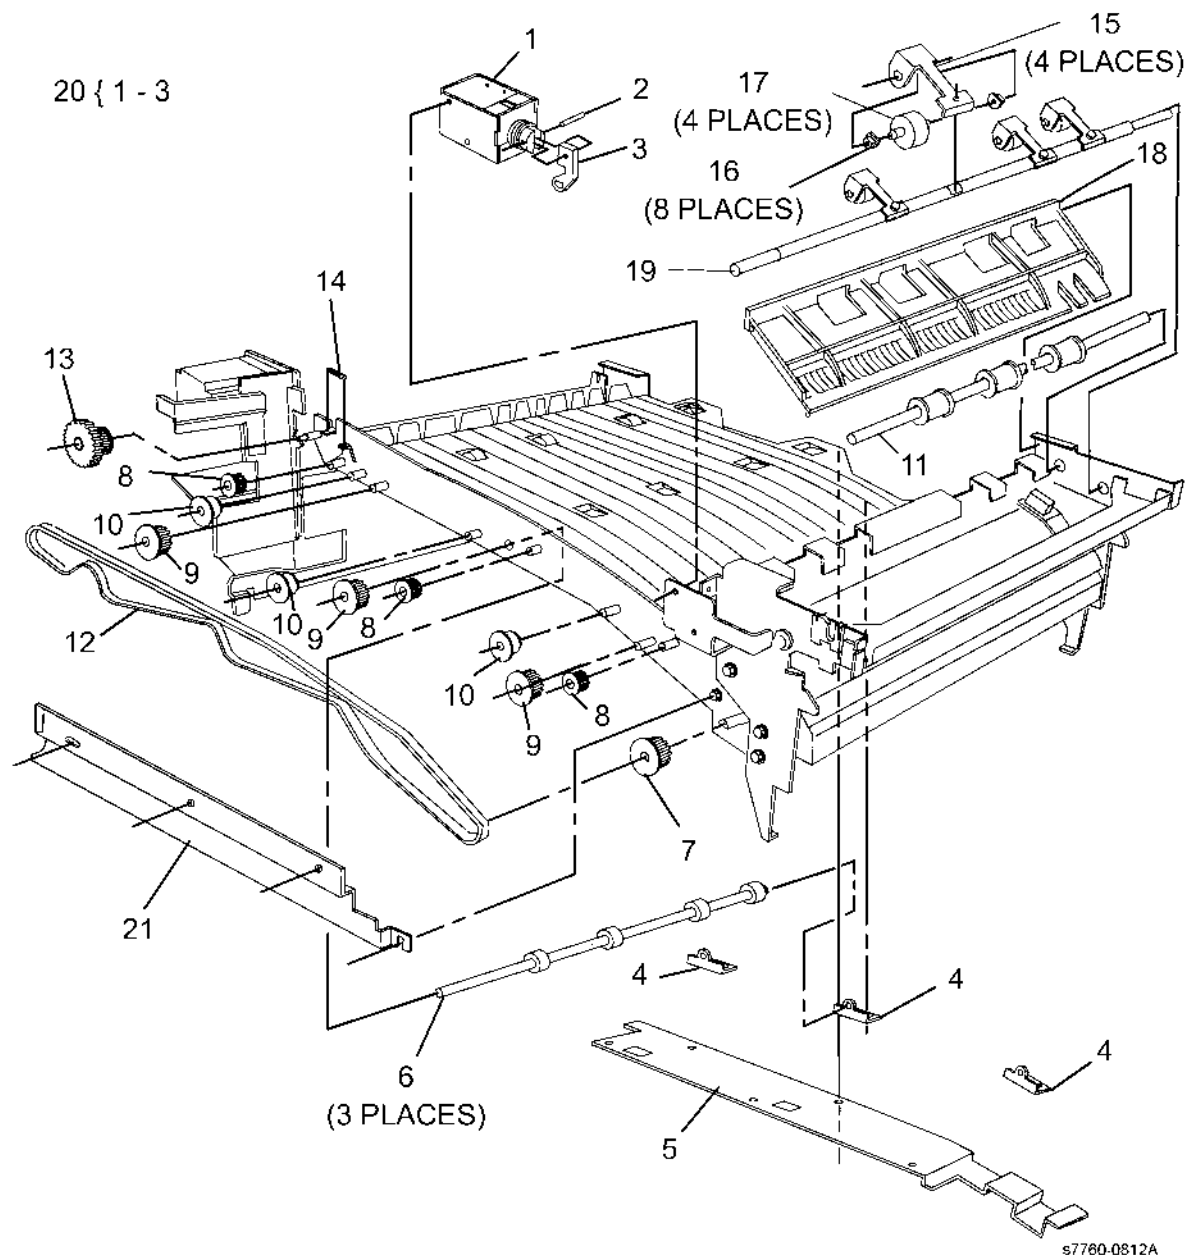

Common Hardware

Item	Part	Description
A	112W27651	Screw (M3x6)
B	112W27659	Screw (M3x6)
C	112W27851	Screw (M3x8)
D	112W28451	Screw (M3x14)
E	113W20457	Screw (M3x4)
F	113W20651	Screw (M3x6)
G	113W20857	Screw (M3x8)
H	113W21057	Screw (M3x10)
J	113W21657	Screw (M3x16)
K	113W27451	Screw (M3x4)
L	113W27551	Screw (M3x5)
M	113W27651	Screw (M3x6)
N	113W27851	Screw (M3x8)
P	113W28051	Screw (M3x10)
Q	113W28851	Screw (M3x20)
R	153W17655	Thread-forming Screw (M3x6)
S	153W17855	Thread-forming Screw (M3x8)
T	153W18055	Thread-forming Screw (M3x10)
U	153W27855	Thread-forming Screw (M3x8)
V	158W27655	Screw (M3x6)
W	158W27663	Screw (M3x6)
X	158W27855	Screw (M3x8)
Y	158W27863	Screw (M3x8)
Z	158W28255	Screw (M3x12)
AA	158W35855	Screw (M4x8)
AB	220W21250	Flange Nut (M3)
AC	251W24251	Washer (4)
AD	251W24450	Washer (4)
AE	252W24250	Nylon Washer (4)
AF	252W26450	Nylon Washer (5)
AG	252W27350	Nylon Washer (6)
AH	252W27450	Nylon Washer (6)
AJ	252W29450	Nylon Washer (8)
AK	271W16050	Dowel Pin (2x10)
AL	271W28250	Dowel Pin (3x12)
AM	271W28650	Dowel Pin (3x16)
AN	271W28950	Dowel Pin (3x22)
AP	271W36850	Dowel Pin (4x20)
AQ	285W15651	Spring Pin (2x6)
AR	285W15851	Spring Pin (2x8)
AS	285W16251	Spring Pin (2x12)
AT	285W28051	Spring Pin (3x10)
AU	285W28251	Spring Pin (3x12)
AV	285W28651	Spring Pin (3x16)
AW	354W15251	E-Clip (2)
AX	354W19251	E-Clip (2.5)
AY	354W21251	E-Clip (3)
AZ	354W21254	K-Clip (3)
BA	354W24251	E-Clip (4)
BB	354W24254	K-Clip (4)
BC	354W26251	E-Clip (5)
BD	354W27251	E-Clip (6)
BE	354W27254	K-Clip (6)
BF	354W29251	E-Clip (8)
BG	113W20657	Screw (M3x6)
BH	113W16051	Screw (M2x10)
BJ	158W45055	Screw (M5x10)
BK	158W36355	Screw (M4x12)
BL	251W24451	Washer (4)
BM	113W20557	Screw (M3x5)
BN	113W15851	Screw (M2x8)
BP	113W28056	Screw (M3x10)
BQ	113W28251	Screw (M3x12)
BR	113W28256	Screw (M3x12)
BS	153W27650	Thread-forming Screw (M3x6)
BT	153W27850	Thread-forming Screw (M3x8)
BU	252W27250	Nylon Washer (6)
BV	252W29350	Nylon Washer (8)
BW	285W29151	Spring Pin (3x25)
BX	158W35655	Screw (M4x6)
BY	113W36257	Screw (M4x12)
BZ	158W35863	Thread-forming Screw - Deltite Tip (M4x8)
CA	158W36055	Screw (M4x10)
CB	153W71153	Screw (M3x8)
CC	153W71453	Screw (M3x14)
CD	153W42353	Screw (M4x12)

Kit Part Number

Table 1 Kit Part Number

Part Number	Description
604K16630	Sensor Kit
600K87510	Sensor Flag Kit
600K78460	Roller Kit
604K05880	MSI Roller Kit
604K00821	Hardware Kit
604K16730	Internal Repackaging Kit
604K16740	Complete Repackaging Kit

Part Number Index

Table 1 Part Number Index

Part Number	Part List
001E66640	PL 21.6
001K70083	PL 5.6
001K70543	PL 5.1
001K70552	PL 5.1
003K11672	PL 5.1
003K12650	PL 5.2
003K12910	PL 5.1
003K13680	PL 21.16
003E23672	PL 16.1
003E23672	PL 2.1
003E52291	PL 5.1
003E52301	PL 5.1
003E53701	PL 15.10
003E53701	PL 16.13
003E53710	PL 15.10
003E53710	PL 16.13
003E59690	PL 21.16
003E61620	PL 21.24
003E63380	PL 21.21
003K86122	PL 4.1
004E11831	PL 2.7
005K05890	PL 2.5
005K83081	PL 2.4
006R01175	PL 6.1
006R01176	PL 6.1
006R01177	PL 6.1
006R01178	PL 6.1
006K22960	PL 21.17
006K24090	PL 21.7
006K24160	PL 21.7
006K24240	PL 21.9
006E71740	PL 5.1
007E61890	PL 5.2
007E61910	PL 5.2
007E62630	PL 2.8
007E64740	PL 2.7
007E66050	PL 15.9
007E66050	PL 16.15
007E66060	PL 15.9

Table 1 Part Number Index

Part Number	Part List
007E66060	PL 16.15
007E66070	PL 15.9
007E66070	PL 16.15
007E66080	PL 16.14
007E77600	PL 21.22
007E77610	PL 21.22
007E77620	PL 21.22
007E77770	PL 21.20
007E79480	PL 2.8
007K85582	PL 1.3
007K85730	PL 2.4
007K86932	PL 2.9
007K87221	PL 1.1
007K87440	PL 2.9
007K87600	PL 1.1
007K88113	PL 1.1
007K88604	PL 1.1
007K88661	PL 1.1
007K89440	PL 21.26
007K89451	PL 21.25
007E89970	PL 21.20
007E89980	PL 21.20
007E89990	PL 21.20
008R12903	PL 4.1
008R12933	PL 7.1
008R12934	PL 7.1
008E94070	PL 21.25
008E94070	PL 21.26
009E26970	PL 16.3
009E26970	PL 16.4
011E10800	PL 15.10
011E10800	PL 16.13
011K94970	PL 5.1
011K96791	PL 16.14
011K97710	PL 21.7
012E10070	PL 16.4
012E11980	PL 21.10
012E11991	PL 21.10
012E12110	PL 21.25
012E12170	PL 21.25
012K94261	PL 10.2

Table 1 Part Number Index

Part Number	Part List
013R00588	PL 4.1
013E18980	PL 5.3
013E25480	PL 21.20
013E25490	PL 21.19
013E26740	PL 21.27
013E27150	PL 21.4
014E42850	PL 16.1
014E42850	PL 2.1
014K81604	PL 9.3
015K49311	PL 5.6
015K49450	PL 16.14
015K49461	PL 16.14
015K49471	PL 15.10
015K49471	PL 16.13
015K49481	PL 5.6
015K60340	PL 21.22
015K60410	PL 21.17
015K65810	PL 21.10
015K65821	PL 21.10
015K65830	PL 21.5
015K65840	PL 21.5
015K65850	PL 21.8
015K65860	PL 21.7
015K65870	PL 21.5
015K65880	PL 21.5
015K65900	PL 21.4
015K65920	PL 21.5
015K67230	PL 21.3
015K67271	PL 21.18
015K67280	PL 21.16
015K69650	PL 21.22
017K93740	PL 15.9
017K93740	PL 16.15
017K93750	PL 15.9
017K93750	PL 16.15
017E97230	PL 21.2
017E98040	PL 21.2
019E58660	PL 21.4
019K97131	PL 2.13
020K10760	PL 21.27
020E37210	PL 21.17

Table 1 Part Number Index

Part Number	Part List
020E37440	PL 21.27
020E37460	PL 21.27
020E37480	PL 21.26
020E37490	PL 21.25
020E37660	PL 21.10
020E37660	PL 21.9
020E37670	PL 21.9
020E37680	PL 21.11
020E37690	PL 21.11
020E37690	PL 21.9
020E37700	PL 21.11
020E37710	PL 21.4
020E37720	PL 21.4
020E37750	PL 21.27
020E93120	PL 16.3
022E27700	PL 21.27
022E27750	PL 21.27
022K66870	PL 21.20
022K66880	PL 21.20
022K67631	PL 21.27
022K67641	PL 21.25
022K67652	PL 21.27
022K67850	PL 21.10
022K67860	PL 21.11
022K67870	PL 21.9
022K67880	PL 21.9
022K70970	PL 21.10
022K70980	PL 21.11
022K70990	PL 21.11
022K71010	PL 21.10
022K71020	PL 21.20
022K71040	PL 21.20
022K71111	PL 21.24
022K71121	PL 21.24
023E21520	PL 21.4
029E31600	PL 2.3
029K92041	PL 21.16
029K92151	PL 21.6
029K92290	PL 21.16
031E94651	PL 21.25
035E65010	PL 6.2

Table 1 Part Number Index

Part Number	Part List
038E23560	PL 2.13
038K87360	PL 21.19
038K87371	PL 21.19
041K94720	PL 21.4
041K94730	PL 21.4
041K94750	PL 21.6
042K92010	PL 10.1
042K93270	PL 10.1
050E19900	PL 21.23
050K43120	PL 16.1
050K43131	PL 16.1
050K48175	PL 2.1
050K49300	PL 21.15
050K51322	PL 2.12
050K51391	PL 16.1
050E89621	PL 21.25
054E16060	PL 16.6
054K16131	PL 2.8
054K18271	PL 16.6
054E18532	PL 16.5
054E18540	PL 16.5
054E26112	PL 21.27
054K26141	PL 8.1
054K27160	PL 21.10
054K27580	PL 21.11
054K28570	PL 21.21
059K00521	PL 21.21
059K15577	PL 16.6
059K15577	PL 2.3
059K15613	PL 2.8
059K18333	PL 16.5
059K18901	PL 15.10
059K18901	PL 16.6
059K21792	PL 16.5
059K23150	PL 5.3
059K23960	PL 12.1
059K24010	PL 2.13
059K24020	PL 2.13
059K26794	PL 2.6
059K36872	PL 11.1
059K37912	PL 21.1

Table 1 Part Number Index

Part Number	Part List
059K45880	PL 2.11
059K45890	PL 12.1
059K45940	PL 2.10
059E95920	PL 16.4
059E95930	PL 16.1
060E01140	PL 21.5
062K16910	PL 3.1
064K91451	PL 5.3
069E00430	PL 13.1
101K46433	PL 9.2
101K52400	PL 9.2
101K52490	PL 13.1
101K57541	PL 10.2
104E94220	PL 9.1
105E11980	PL 9.1
105E11982	PL 9.1
105E12080	PL 21.21
105E12170	PL 21.21
105E13100	PL 21.9
105E15120	PL 21.19
105E15140	PL 21.21
105E15190	PL 9.1
105E16270	PL 9.1
105E16280	PL 9.1
105K20452	PL 9.1
105K20463	PL 9.1
105K21081	PL 21.12
105K22140	PL 9.1
110K10651	PL 2.8
110K10881	PL 16.1
110K11211	PL 10.2
110E11590	PL 21.7
110E11990	PL 21.4
110K12282	PL 21.24
110K12990	PL 16.1
110K12990	PL 2.1
110E94770	PL 10.1
110E97990	PL 10.1
110E97990	PL 21.3
113E20900	PL 21.24
113K82310	PL 9.3

Table 1 Part Number Index

Part Number	Part List
116K90811	PL 6.1
117E16210	PL 9.2
117K31400	PL 9.2
120E11971	PL 2.12
120E18141	PL 2.4
120E18161	PL 2.10
120E18820	PL 15.10
120E20690	PL 21.26
120E24310	PL 21.8
121K22220	PL 2.6
121K23270	PL 1.2
121K24610	PL 21.26
121E25670	PL 13.1
121K31360	PL 21.22
121K34421	PL 21.25
121K34620	PL 21.7
121K34630	PL 21.8
121K35312	PL 21.27
121K35313	PL 21.27
121E92720	PL 21.21
121E92780	PL 2.13
121E92890	PL 21.10
121E92890	PL 21.11
122K93331	PL 4.2
122K93341	PL 4.2
127K23230	PL 2.4
127K29244	PL 4.1
127K29332	PL 9.1
127K29341	PL 8.1
127K29513	PL 2.9
127K31841	PL 16.15
127K32731	PL 8.1
127K33930	PL 6.1
127K33940	PL 6.1
127K36021	PL 15.9
127K36021	PL 16.15
127K36641	PL 8.1
127K38050	PL 21.23
127K38881	PL 1.1
127K40051	PL 21.26
127K40281	PL 21.10

Table 1 Part Number Index

Part Number	Part List
127K40281	PL 21.11
127K46170	PL 21.17
127K46170	PL 21.22
127K48210	PL 21.19
127K49040	PL 9.1
127K49440	PL 13.1
130K60851	PL 2.3
130K60866	PL 1.3
130K61511	PL 15.10
130K61511	PL 16.6
130K63000	PL 6.2
130K64300	PL 21.23
130E80100	PL 21.11
130E81600	PL 15.10
130E81600	PL 16.6
130E82190	PL 2.12
130E82190	PL 2.4
130E82190	PL 2.3
130E82190	PL 2.9
130E82190	PL 2.10
130E84300	PL 2.9
130E87370	PL 21.10
130E87370	PL 21.11
130E87370	PL 21.21
130E87400	PL 16.5
130E87400	PL 2.6
130E87410	PL 21.18
130E87410	PL 21.21
130K87970	PL 21.25
130K88190	PL 21.10
130K88190	PL 21.11
130K88190	PL 21.9
130K88291	PL 21.25
130E88350	PL 21.25
130K88770	PL 21.15
130K88770	PL 21.4
130K88770	PL 21.5
130K88770	PL 21.6
130K88770	PL 21.8
130K88780	PL 21.17
130K88780	PL 21.26

Table 1 Part Number Index

Part Number	Part List
130K88780	PL 21.25
130K88780	PL 21.7
130K88780	PL 21.8
130K88780	PL 21.19
130K88780	PL 21.18
130E91010	PL 4.1
133K27690	PL 13.1
146E01770	PL 21.4
152S05108	PL 9.2
160K88292	PL 9.1
160K91011	PL 16.5
160K97661	PL 9.2
162K55110	PL 9.2
162K55941	PL 9.3
162K55971	PL 9.3
162K56000	PL 9.3
162K56031	PL 9.3
162K62111	PL 9.3
162K62811	PL 15.10
162K62811	PL 16.6
251W31178	PL 21.4
407W07516	PL 21.20
407W07516	PL 21.21
407W07717	PL 21.16
407W07731	PL 21.16
407W08727	PL 21.21
413W11660	PL 21.10
413W11660	PL 21.7
413W11660	PL 21.11
413W66150	PL 5.1
413W66250	PL 21.10
413W66250	PL 21.11
413W77559	PL 21.4
413W77559	PL 21.7
423W25554	PL 21.9
423W26754	PL 21.25
423W27854	PL 21.26
423W40054	PL 21.11
423W46754	PL 21.20
423W86254	PL 21.17
423W86454	PL 21.11

Table 1 Part Number Index

Part Number	Part List
423W87054	PL 21.10
423W88254	PL 21.27
600K78460	PL 2.5
604K07062	PL 5.2
604K13840	PL 21.23
604K18740	PL 21.16
604K19991	PL 2.8
604K20891	PL 5.2
604K22520	PL 6.2
604K22530	PL 6.2
604K22540	PL 6.2
604K22550	PL 6.2
604K25210	PL 21.25
801K16551	PL 21.15
801K16560	PL 21.15
801K16580	PL 21.15
801K16581	PL 21.16
801K18730	PL 21.16
802E12400	PL 10.2
802E12490	PL 10.3
802E12501	PL 10.3
802E12772	PL 2.10
802K12951	PL 5.2
802E14351	PL 10.3
802E16971	PL 8.1
802E23931	PL 15.11
802E23931	PL 16.16
802E23941	PL 15.11
802E23951	PL 15.11
802E23952	PL 16.16
802E23961	PL 16.16
802E23982	PL 16.4
802E23992	PL 16.3
802K25721	PL 15.10
802K25731	PL 16.13
802K27076	PL 2.9
802E27861	PL 10.3
802E33910	PL 10.3
802K46071	PL 10.2
802K47090	PL 4.1
802K50492	PL 15.11

Table 1 Part Number Index

Part Number	Part List
802K50492	PL 16.16
802K56394	PL 2.3
802K59860	PL 10.1
802K59881	PL 10.2
802K60191	PL 6.2
802K62050	PL 10.1
802K63551	PL 6.1
802K63561	PL 6.1
802K63571	PL 6.1
802K63581	PL 6.1
802K67130	PL 21.3
802K67140	PL 21.4
802K67961	PL 10.3
802E73871	PL 21.3
802K86530	PL 6.1
802K89430	PL 2.7
802K89970	PL 10.2
802K89981	PL 10.1
802K90000	PL 10.3
807E01750	PL 21.22
807E02040	PL 21.20
807E02050	PL 21.17
807E02060	PL 21.18
807E02070	PL 21.17
807E02080	PL 21.22
807E04000	PL 21.26
807E04010	PL 21.26
807E04700	PL 21.10
807E04700	PL 21.7
807E04710	PL 21.10
807E04720	PL 21.11
807E04740	PL 21.7
807E04750	PL 21.7
807E04760	PL 21.8
807E08600	PL 21.26
807E08980	PL 21.25
807E08990	PL 21.4
807E08990	PL 21.7
809E07520	PL 2.13
809E26070	PL 2.8
809E26330	PL 5.6

Table 1 Part Number Index

Part Number	Part List
809E27640	PL 2.13
809E28961	PL 15.10
809E28961	PL 16.13
809E28980	PL 15.10
809E28980	PL 16.13
809E29620	PL 2.8
809E41570	PL 21.22
809E41620	PL 21.22
809E56092	PL 21.27
809E56850	PL 21.4
809E56860	PL 21.4
809E56880	PL 21.7
809E59981	PL 21.20
809E59991	PL 21.20
830E57230	PL 10.1
892E82830	PL 2.1
908W01201	PL 9.2
960K01742	PL 15.9
960K01752	PL 16.15
960K02901	PL 9.2
960K03381	PL 15.9
960K04671	PL 21.12
960K04681	PL 21.12
960K04691	PL 21.12
960K06700	PL 9.2
960K06710	PL 9.2
960K15800	PL 9.1
960K16660	PL 2.6
960K22980	PL 13.1
960K34661	PL 13.1
962K08790	PL 9.2
962K18401	PL 21.18
962K18411	PL 21.21
962K18420	PL 21.22
962K18431	PL 21.22
962K18441	PL 21.22
962K20052	PL 9.2
962K27671	PL 21.8
962K29160	PL 21.12
962K29221	PL 21.15
962K36610	PL 21.12

Table 1 Part Number Index

Part Number	Part List
962K37972	PL 9.3
962K37980	PL 9.3
962K37991	PL 9.3
962K41710	PL 10.2

